

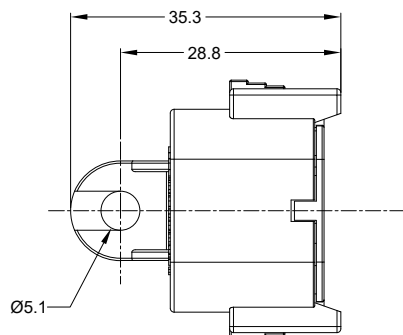


KEY-B CONFIGURATION
P/N ATM06-08SB-CAP
INSERT COLOR: BLACK

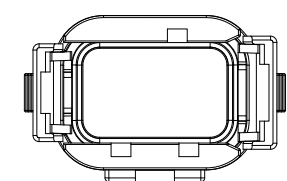

KEY-C CONFIGURATION
P/N ATM06-08SC-CAP
INSERT COLOR: GREEN



KEY-D CONFIGURATION
P/N ATM06-08SD-CAP
INSERT COLOR: BROWN

- NOTES: UNLESS OTHERWISE SPECIFIED
1. MATERIAL: THERMOPLASTIC, HOUSING COLOR: GREY
INSERT COLOR: PER KEY CONFIGURATION
 2. RoHS COMPLIANT
 3. MOISTURE RESISTANCE: IP68 (1M OF WATER FOR
A PERIOD OF 24 HOURS , MATED CONDITION)
 4. TEMPERATURE RANGE: -55C~125C
 5. USE WITH CONNECTORS ATM06-08SX*
(X = A,B,C,D KEYS; * = MODIFICATIONS AND/OR COLORS)
 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE	26JUN15	JAH	
A2	-	REVISED COLOR AND IP RATING	20NOV2020	JAH	DH

TITLE: PROTECTIVE CAP 8 POSITION, ATM-SERIES
DWG NO.: ATM06-08SX-CAP
REV: A2
SH: 1
OF: 1

SEE KEY OPTIONS		DESCRIPTION		ITEM
PART NUMBER				
QUANTITY	MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED: 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1° 3) Note reference =		SIGNATURES DRAWN: J. HEAD CHECKED: ENGINEER: APPROVAL:	DATE 23JUN2015	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 PROTECTIVE CAP, 8 POSITION, ATM-SERIES
MATERIAL SPECIFICATIONS:		CUSTOMER:		
PROCESS SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		
NEXT ASSY:				
SIZE: B	TYPE: C-	DWG NO: ATM06-08SX-CAP	REVISION: A2	
SCALE: NONE		SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[ATM06-08SA-CAP](#)