
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 44822	05/20	JPM

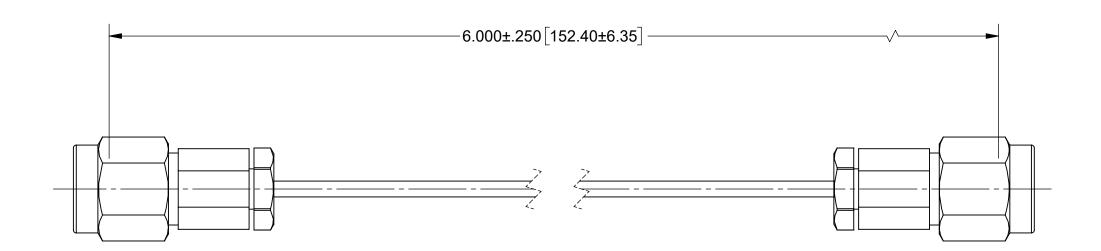

MATERIAL:

CONNECTORS: 2X SMA MALE (SF2911-60966)

SV *∅*.047 SUPERFLEX CABLE (200-70-391) CABLE:

STRAIN RELIEF: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 26.5 GHz. MATERIAL: SEE NOTES FINISH: SEE NOTES

SURFACE AREA: N/A

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

HIRD ANGLE PROJECTION	DRAWN:
	CHECKE

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING,
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

DRAWN:	BNK 05/08/20
CHECKED:	JPM 05/08/20
APPROVED:	JPM 05/08/20



SMA STR. M TO SMA STR. M 6" SUPERFLEX CABLE ASSEMBLY

7029-3437 В

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7029-3437