

NOTES:

1) LABEL REQUIREMENT:


LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).

2) ASSEMBLY REQUIREMENT:

USE ND353 EPOXY FOR TERMINATION.

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2019/04/17	

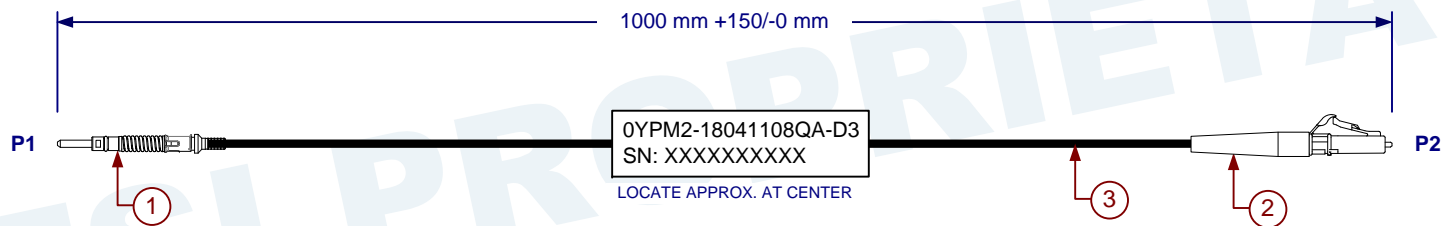

3	C24895	CABLE, FLIGHTLINX, SM, 125/400/900UM, BEND OPTIMIZED, 1.8mm	3.78 FEET
2	961-153-171	SIMPLEX LC, SM, 125UM FERRULE 2.0 FLEX BOOT WHITE	1
1	M29N0226Y	TERMINUS ASSY, PC, NO KEY, WITH CRIMP SLEEVE, 126um	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

		MATERIAL:	DFTR/Designer: C. Hoang 2019/04/12	Amphenol FSI
			Check By: S. McEwan 2019/04/15	
			Manufacturing: S. McEwan 2019/04/15	
			Market Manager/PLM: Q. Abraham 2019/04/16	
		DRILLED HOLE DIAMETER TOLERANCE Ø.000 TO Ø.125 $^{+0.01}_{-0.01}$ Ø.251 TO Ø.500 $^{+0.02}_{-0.01}$ Ø.126 TO Ø.250 $^{+0.02}_{-0.01}$ Ø.501 TO Ø.750 $^{+0.03}_{-0.01}$	Configuration Management: L. Brown 2019/04/17	TITLE: NGCON TERMINI TO LC ASSEMBLY, SM, 125/400/900 um
		DO NOT SCALE THIS DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCES ON 3 PL = ±.010 2 PL = ±.020 ANGLES = ±3° INTERPRET DIM AND TOL PER ASME 14.5M-1994	This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Fiber Systems International. Copyright © 2017 Fiber Systems International. Non published work. All rights reserved.	
NEXT ASSY	USED ON			
APPLICATION				
SIZE A	CAGE CODE 0YPM2	DWG NO 18041108QA-D3	REV -	
SCALE: NONE		SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[18041108QA-D3](#)