


NOTES:

- 1) LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) TERMINUS ENFACE REQUIREMENTS SHALL MEET GR-326 AND IEC 61300-3-35.
- 3) MAX IL @ 850 nm SHALL BE 0.5 dB PER CONNECTION.

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

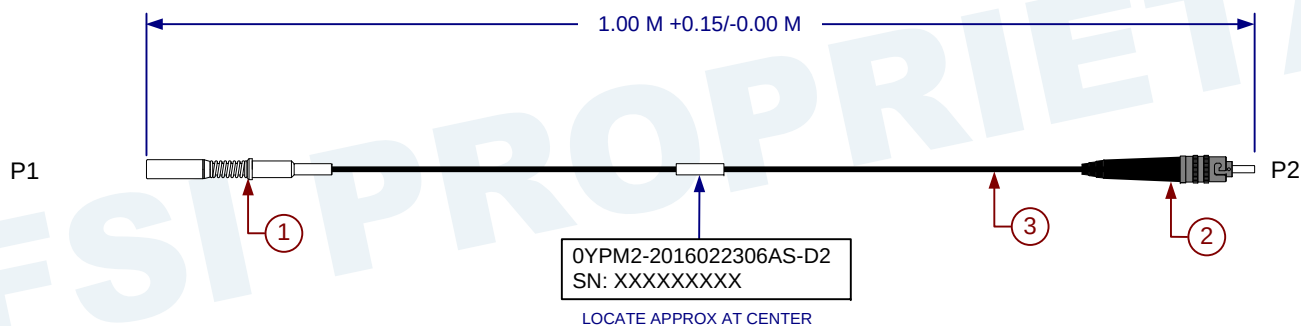

4	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
3	SE001L202C0E-BI	CABLE, 2.0mm 50um OM3 BEND INSENSITIVE P/N: SE001L202C0E-BIF	3.78 FEET
2	MSTC1100	ST CONNECTOR, MM 128UM (COMMERCIAL)	1
1	M29L1000	TERMINUS, SOC, M29504/05-4046 MM, .127MM, +.002/-0 FIBER HOLE	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

		MATERIAL:	DFT/Designer: C. Hoang 2017/10/23	Amphenol FSI	
			Check By: B. Waite 2017/10/24		
			Manufacturing: B. Waite 2017/10/24	TITLE: M29504/5 SOCKET TO ST CABLE ASSEMBLY, MM, 62.5/125um	
		DRILLED HOLE DIAMETER TOLERANCE Ø.000 TO Ø.125 $\begin{smallmatrix} .001 \\ .001 \end{smallmatrix}$ Ø.251 TO Ø.500 $\begin{smallmatrix} .001 \\ .001 \end{smallmatrix}$ Ø.126 TO Ø.250 $\begin{smallmatrix} .001 \\ .001 \end{smallmatrix}$ Ø.501 TO Ø.750 $\begin{smallmatrix} .001 \\ .001 \end{smallmatrix}$	Market Manager/PLM: Q. Abraham 2017/10/25		
		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994	Configuration Management: L. Brown 2017/11/13	SIZE A	CAGE CODE OYPM2
NEXT ASSY	USED ON	This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved.		DWG NO 2016022306AS-D2	REV -
APPLICATION		SCALE: NONE		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[2016022306AS-D2](#)