

NOTES:


1) LABEL REQUIREMENT:

- LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- LOCATE APPROXIMATELY AS SHOWN.

2) TEST REQUIREMENT:

IL @ 1310 nm SHALL BE 3.25 dB MAX.

| REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION | | | |
|--------------------------------------------------------|-----------------|------------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| - | INITIAL RELEASE | 2017/11/13 | |

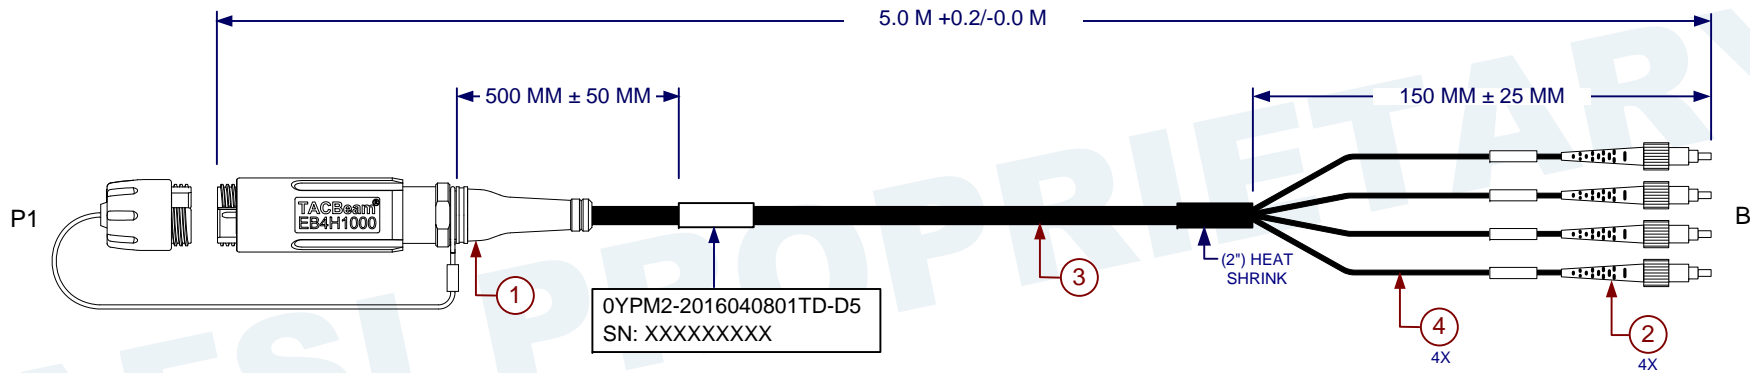

| 4 | BSFT0600 | FURCATION TUBE, 2MM ID600UM, BLACK | 2 FEET |
|----------|---------------|---------------------------------------------------------------|-------------|
| 3 | WTTO-0400 | CABLE, 4 FIBER 9/125 TACTICAL DISTRIBUTION | 17.06 FEET |
| 2 | BFCC2000-BL-1 | FC SM CONNECTOR, METAL BODY W/CERAMIC FERRULE; BLUE BOOT | 4 |
| 1 | EB4H1000-3445 | PLUG ASSY, BLACK ALUM, 4 CH, 1310/1550 SM, TACBEAM 4.5-6.0 MM | 1 |
| ITEM NO. | PART NO. | DESCRIPTION | QTY/ LENGTH |

| P1 | PINOUT DIAGRAM | B LABEL INFORMATION |
|----|----------------|---------------------|
| A1 | | A1 |
| B1 | | B1 |
| A2 | | A2 |
| B2 | | B2 |

| | | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------|--------|
| MATERIAL: | | DFTR/Designer: 2017/10/20 | | | |
| | | Check By: B. Waite 2017/10/24 | | | |
| | | Manufacturing: B. Waite 2017/10/24 | | | |
| | | Market Manager/PLM: Q. Abraham 2017/10/25 | | | |
| DRILLED HOLE DIAMETER TOLERANCE | | Configuration Management: L. Brown 2017/11/13 | TITLE: 4 CHANNEL TACBEAM PLUG TO FC ASSEMBLY, SM | | |
| <small>DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994</small> | | <small>This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved.</small> | | | |
| NEXT ASSY | USED ON | SIZE: A | CAGE CODE: 0YPM2 | DWG NO: 2016040801TD-D5 | REV: - |
| APPLICATION | | SCALE: NONE | | SHEET 1 OF 1 | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[2016040801TD-D5](#)