


1. MATERIALS AND FINISHES:
  - BODY - ZINC DIE CAST, NICKEL PLATING
  - CONTACT - PHOSPHOR BRONZE, GOLD PLATING (.000003 THICK)
  - @ CONTACT AREA ONLY, TIN PLATING AT TAIL, NICKEL PLATED OVERALL
  - INSULATOR - POLYPROPYLENE
  - ROUND PIN - BRASS, TIN PLATING
  - GROUNDNG TERMINAL - STEEL, TIN PLATING
2. ELECTRICAL:
  - A. IMPEDANCE: 50 OHM
  - B. FREQUENCY RANGE: DC - 1 GHz
  - C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
  - A. DURABILITY: 500 CYCLES MIN.
  - B. TEMPERATURE RANGE: -55° C TO 85° C
4. PACKAGING:
  - A. PACKAGED IN PACKING TRAYS
  - B. QUANTITY PER TRAY: 40

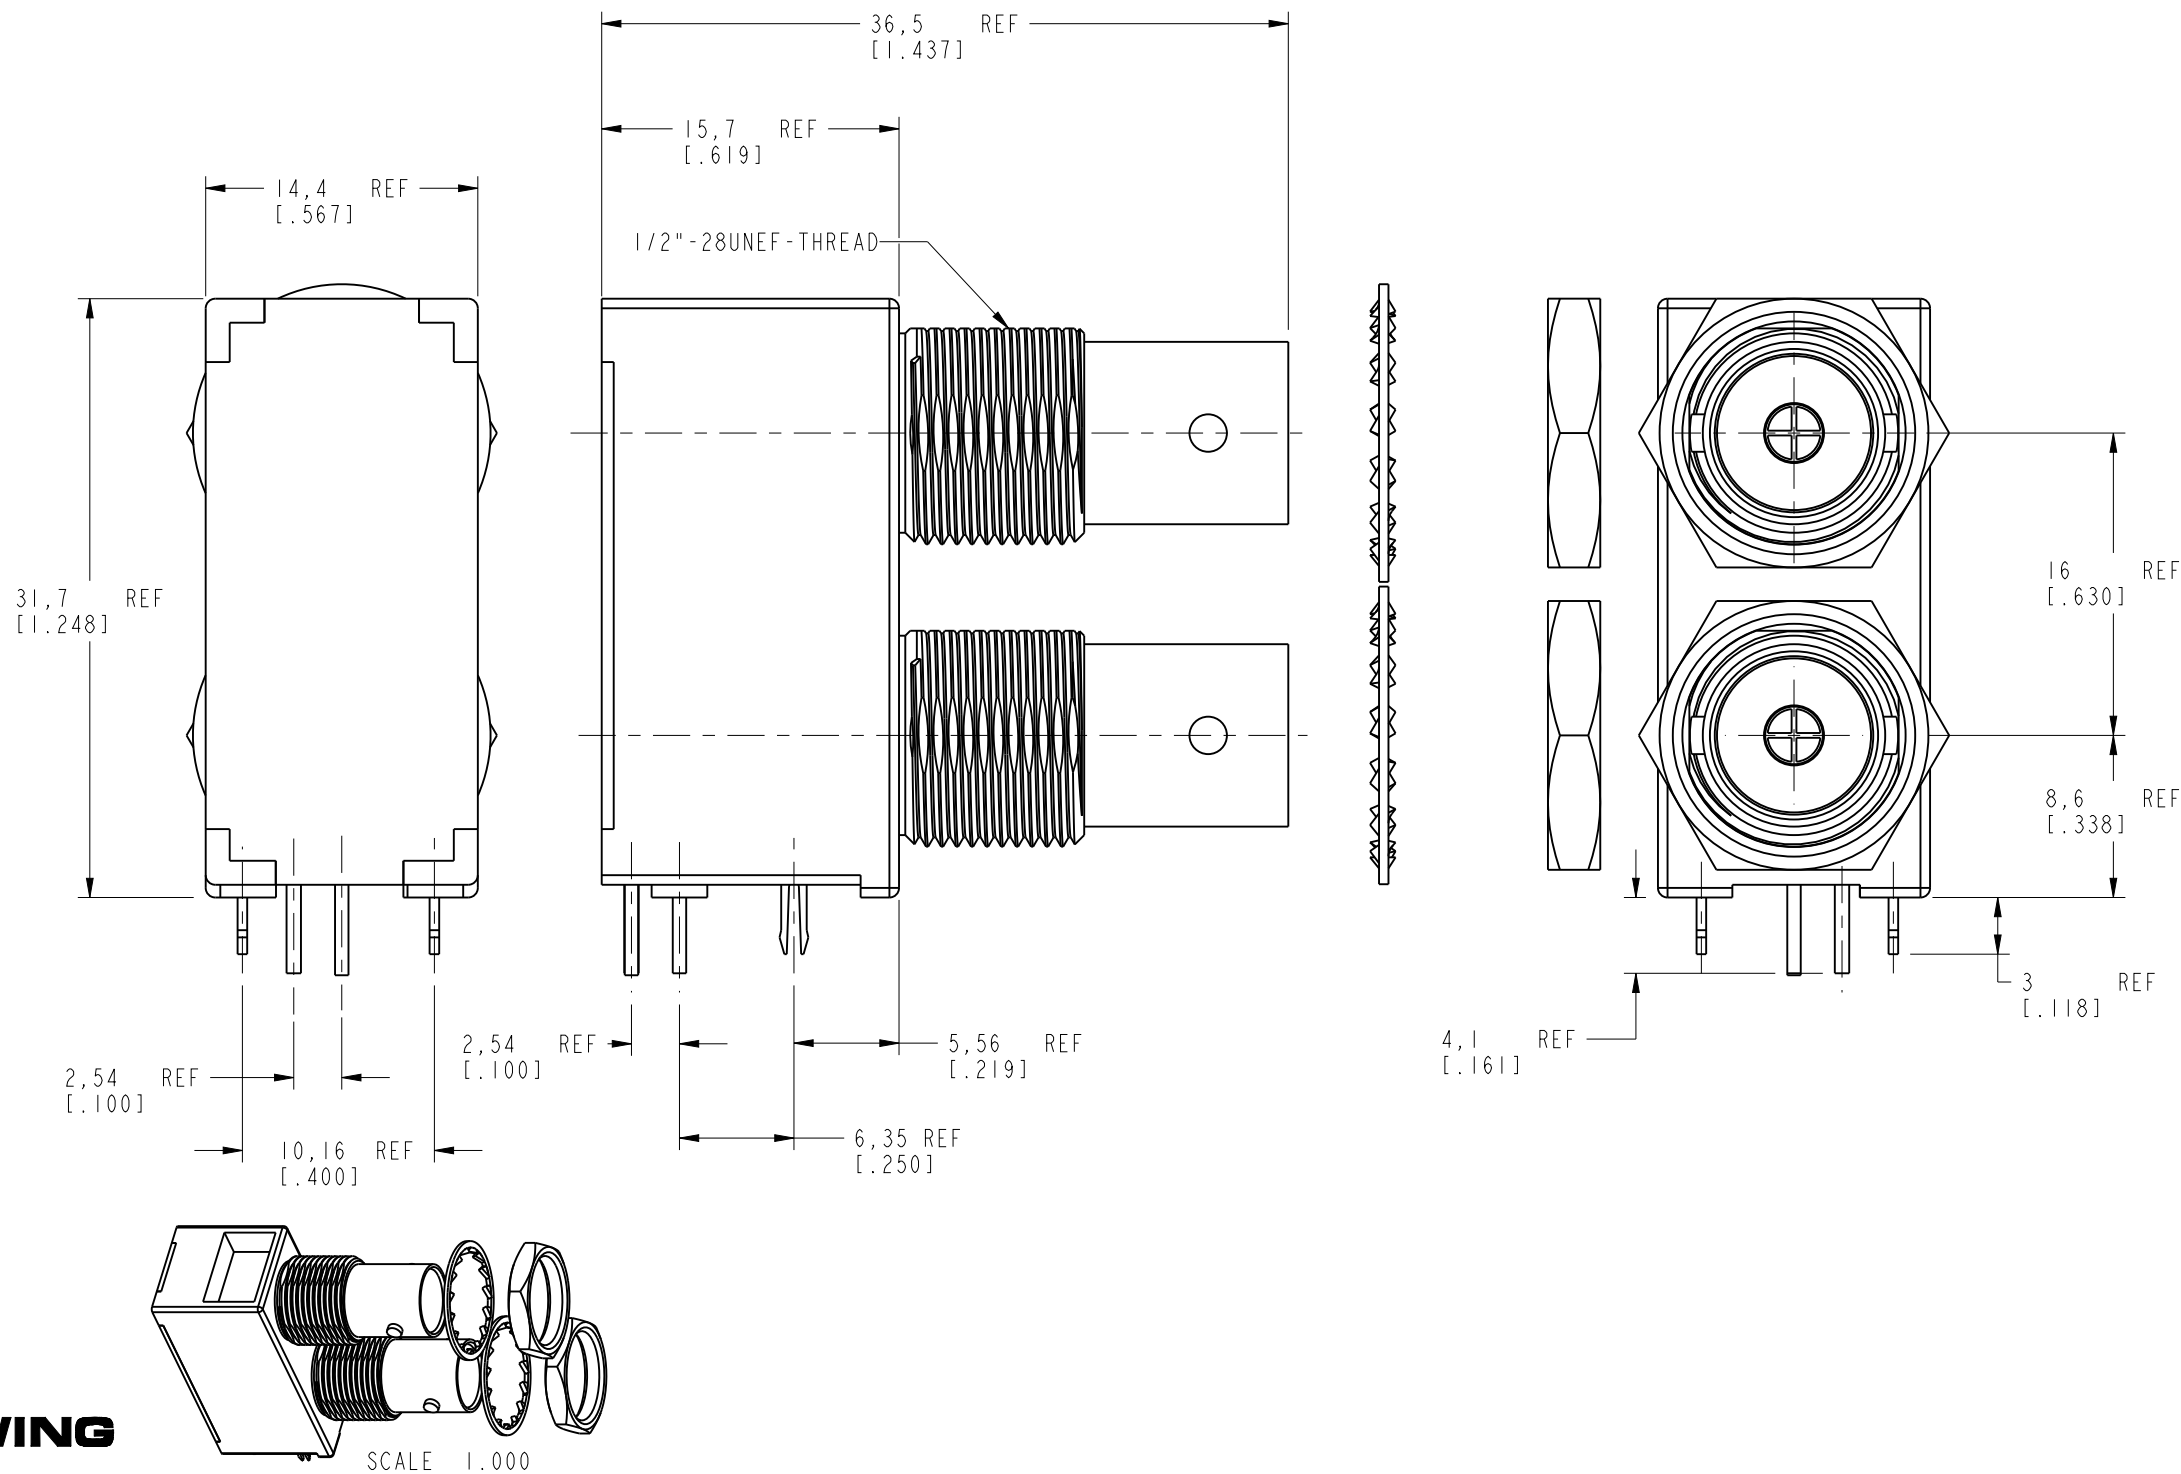

# CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm    0.5 - 6mm    6 - 30mm    30 - 120mm    ANGLES ± 0.05mm    ±0.1mm    ±0.2mm    ± 0.3mm    ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL - -	DRAWN ERIC WANKOFF	DATE 01-Aug-12	TITLE 50 OHM BNC DUAL PORT R/A JACK W/ BACKPLATE	Amphenol RF www.amphenolrf.com	
		ENGINEER ERIC WANKOFF	DATE 01-Aug-12		DRAWING NO. 31-6590	
	REFERENCE	APPROVED K. CAPOZZI	DATE 3/26/13	SCALE: 2.5:1.0	SHEET	2 OF 2
	CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE B	REV A	ITEM NO. 31-6590
	FINISH					PART NO. 31-6590

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[031-6590](#)