
NOTES :		82-6098-RFX	
		DRAWING NO. REV	DESCRIP
INTERFACE PER MIL-SID-348 SERIES 'N' 25, 2 11.0001 18,24 1.7181 18,24 1.7181 18,24 1.7181	26,7 11.0511 18,7 1.7361 791 Ø 12,5 [.492] Ø 12,5 [.492] Ø 12,5 [.492] Ø 12,5 [.492] Ø 12,5 [.492] Ø 12,5 [.492] Ø 12,5 [.492]	$\begin{array}{c c c c c c c c c c c c c c c c c c c $	DESCRIP RELEASE T
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: C.5 - 6mm 6 - 30mm 30 - 120mm ±0.2mm ±0.4mm ± 0.6mm NOTICE - These drawings, specifications, or other data (1) ore, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confident at and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	FERENCE EN# 82-6163_ASSY	RECOMMENDED CABLE STRIPPING DIMENSIONS SCALE 3.000 DATE D. MCGRATH DATE D. BARTHELMES DATE	<u>CUSTOME</u> <u>FOR</u> 'N' PANEL JACK DIRECT SOLDER FOR .085,.086 S
rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	C	AD_F!LE 1:\N\82-6098-RFX	code 10 DV 74868

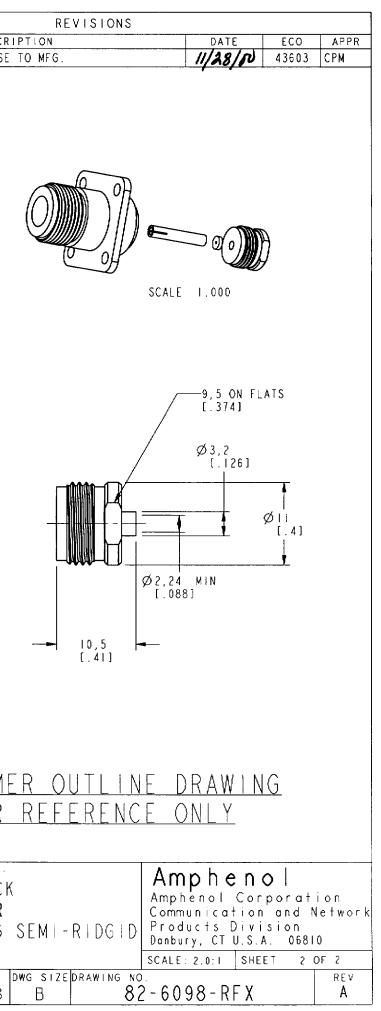

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 082-6098-RFX