

Charge converter

CC701A

SPECIFICATIONS

TRANSFER CHARACTERISTICS¹

Sensitivity, $\pm 5\%$	10 mV/pC
Frequency response:	
$\pm 5\%$	10 - 25,000 Hz
-3 dB	2.0 Hz
Nonlinearity	<1%
Harmonic distortion	<1%

INPUT CHARACTERISTICS

Allowable source capacitance, max	6,000 pF
-----------------------------------	----------

OUTPUT CHARACTERISTICS

Output voltage, max	5 V rms
Electrical noise, nominal:	
Source capacitance (transducer + cable)	1,000 pF
Broadband 2.5 Hz to 25 kHz	30 μ V
Spectral 10 Hz	4.0 μ V/ $\sqrt{\text{Hz}}$
100 Hz	0.6 μ V/ $\sqrt{\text{Hz}}$
1,000 Hz	0.2 μ V/ $\sqrt{\text{Hz}}$
10,000 Hz	0.06 μ V/ $\sqrt{\text{Hz}}$

Output impedance (depending on source capacitance)	25 - 150 Ω
Bias output voltage, nominal	10 VDC

POWER REQUIREMENTS

Voltage source	18 - 30 VDC
Constant current ²	2 - 10 mA

ENVIRONMENTAL

Temperature range	-40° to +100°C
-------------------	----------------

PHYSICAL


Weight	40 grams
Case material	stainless steel
Connectors:	
Signal input	Microdot 10-32
Signal output	BNC

Notes: ¹ Measured with 1,000 pF source capacitance, 21V supply, 4 mA.


² To minimize the possibility of signal distortion when driving long cables with high vibration signals, 24 to 30 VDC powering is recommended. The higher level constant current source should be used when driving long cables.

Key features

- Strong voltage signal
- Immune to cable motion noise
- Manufactured in ISO 9001 facility

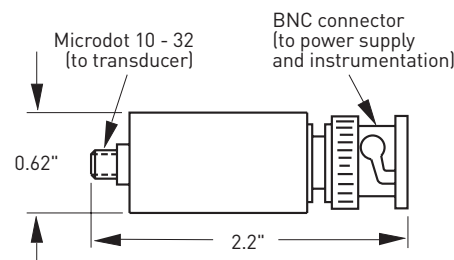

Powering diagram

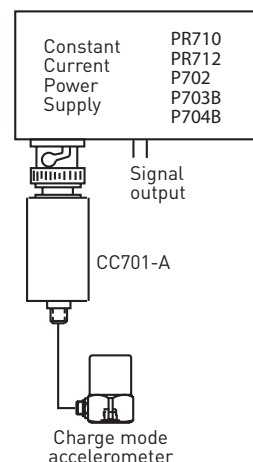

Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[CC701A](#)