NOTES:

I. MATERIALS AND FINISHES:

BODY - BRASS, GOLD PLATING CONTACT - BRASS, GOLD PLATING INSULATOR - PEEK

2. ELECTRICAL:

A. IMPEDANCE:50 OHM

B. FREQUENCY RANGE: DC-10 GHz

C. RETURN LOSS: 30 dB MIN.@ DC-4 GHz 25 dB MIN.<u>@ 4</u>-6 GHz

D. INSERTION LOSS: 0.03X $\sqrt{f(GHz)}$ dB MAX. E. INSULATION RESISTANCE:5 G Ω MIN.

F. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.

G. POWER HANDLING: 200 W MAX.@ 2.2 GHz AT 20°C, SEA LEVEL, VSWR I.0

H. INTERMODULATION(3rd order):160 dBc MIN.@ (2X43dBm)

3. MECHANICAL:


A. MATING CYCLES: 1000 MIN.

B. ENGAGEMENT FORCE: 10 N MAX

C. DISENGAGEMENT FORCE: 2.2 N MIN


D. INNER CONTACT RETENTION FORCE: 7 N MIN

E. TEMPERATURE RANGE: -65° C TO 165° C

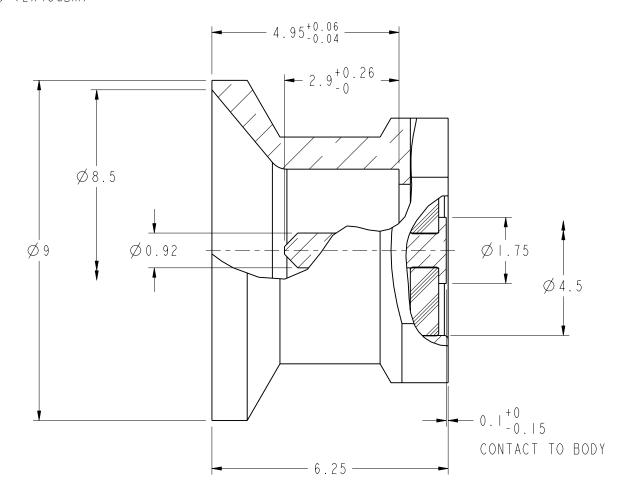


THIRD ANGLE PROJ. 🕀 🖯





SCALE 3.000

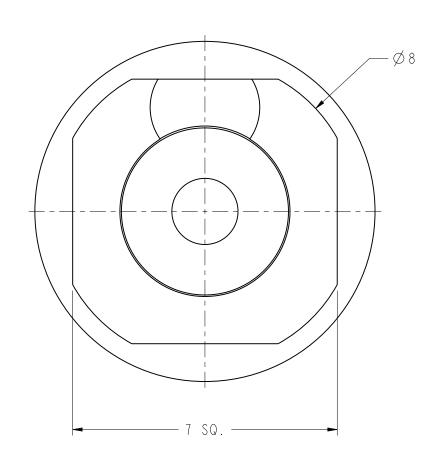

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

MATERIAL	DRAWN STAMN	DATE 20-Nov-15	Т
	ENGINEER RICKSON	DATE 26 - Aug - 15	
REFERENCE EAR 6570 II9SI4R-40ML5	APPROVED S.HSIEH	DATE 20-Nov-15	SC
EINICH	CAD FILE		
FINISH	I:\PSMP\PSMPI25IBI-003-8GPAP8GPA-50		

IILE			
POWE	R-SMP,	MALE	FOF
PCB	SMOOTH	BORE	

SCALE:	10.0:1.0	SHEET	2	OF 2	
DWG SIZE				REV	
R				R	

Amphenol RF
Danbury CT USA, Tainan, Taiwan, Shenzhen, China
www.amphenolrf.com

DRAWING NO.PSMP1251B1-003-8GPAP8GPA-50
ITEM NO. 671251ABSA12C5F
PART NO. PSMP-MSSB-PCS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: PSMP-MSSB-PCS