
PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	DCN 46496	06/17	GPF	

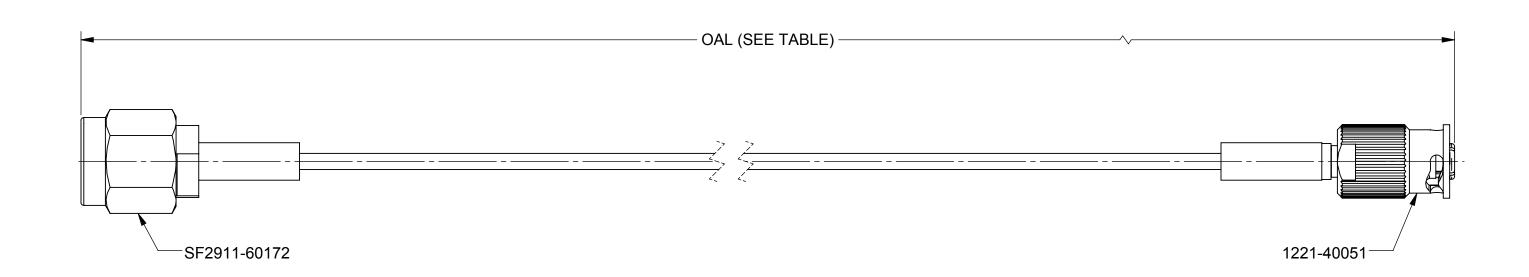

MATERIAL:

**ROHS COMPLIANT** 

**CONNECTORS**: SMA STRAIGHT MALE (SF2911-60172)

SMP QB® STRAIGHT FEMALE (1221-40051)

STANDARD FLEXTRA CABLE (200-70-214) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz MATERIAL: **SEE NOTES** 

FINISH:

SURFACE AREA: N/A

**PROPRIETARY** 

SEE NOTES

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

.XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

HIRD ANGLE PROJECTION	DRAW
	CHEC
	A DDD

UNLESS OTHERWISE SPECIFIED

SV P/N

7012-1301

7012-1302

7012-1303

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63 MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

IRD ANGLE PROJECTION	DRAWN:	VB 06/05/17
	CHECKED:	GPF 06/05/17
	APPROVED:	GPF 06/05/17



TITLE: SMP QB® FEMALE TO SMA MALE FOR .047 CABLE **ASSEMBLY** 

L(OAL)

(6.000")

(12.000")

(24.000")

7012-1301-1302-1303 B 95077 SCALE: 1:1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

7012-1302