
PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 44818	05/20	JPM
Α	DCN 51145	10/21	BNK

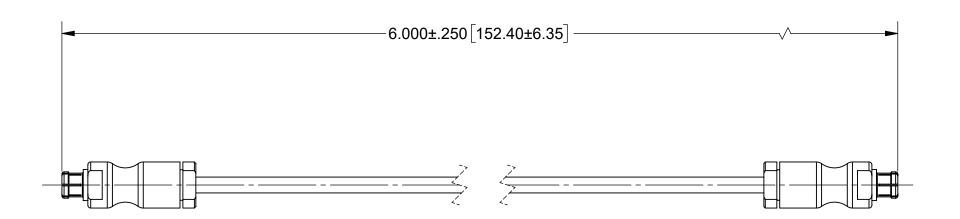

MATERIAL:

CONNECTORS: 2X SMPM FEMALE (3221-40128)

SV ∅.047 SUPERFLEX CABLE (200-70-391) CABLE:

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 33 GHz. MATERIAL: SEE NOTES FINISH: SEE NOTES SURFACE AREA: N/A PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

DRAWN: BNK 05/08/20 THIRD ANGLE PROJECTION CHECKED: APPROVED: JPM 05/08/20

MICROWAVE UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES. 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63. MIL-STD-10.
6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

TITLE: SMPM STR. F TO SMPM STR. F 6" SUPERFLEX CABLE ASSEMBLY

SIZE DWG. NO. 7032-7845 JPM 05/08/20 В

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7032-7845