


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 43237	03/17	MAL
A	REV. DCN 46705	08/04/17	STW

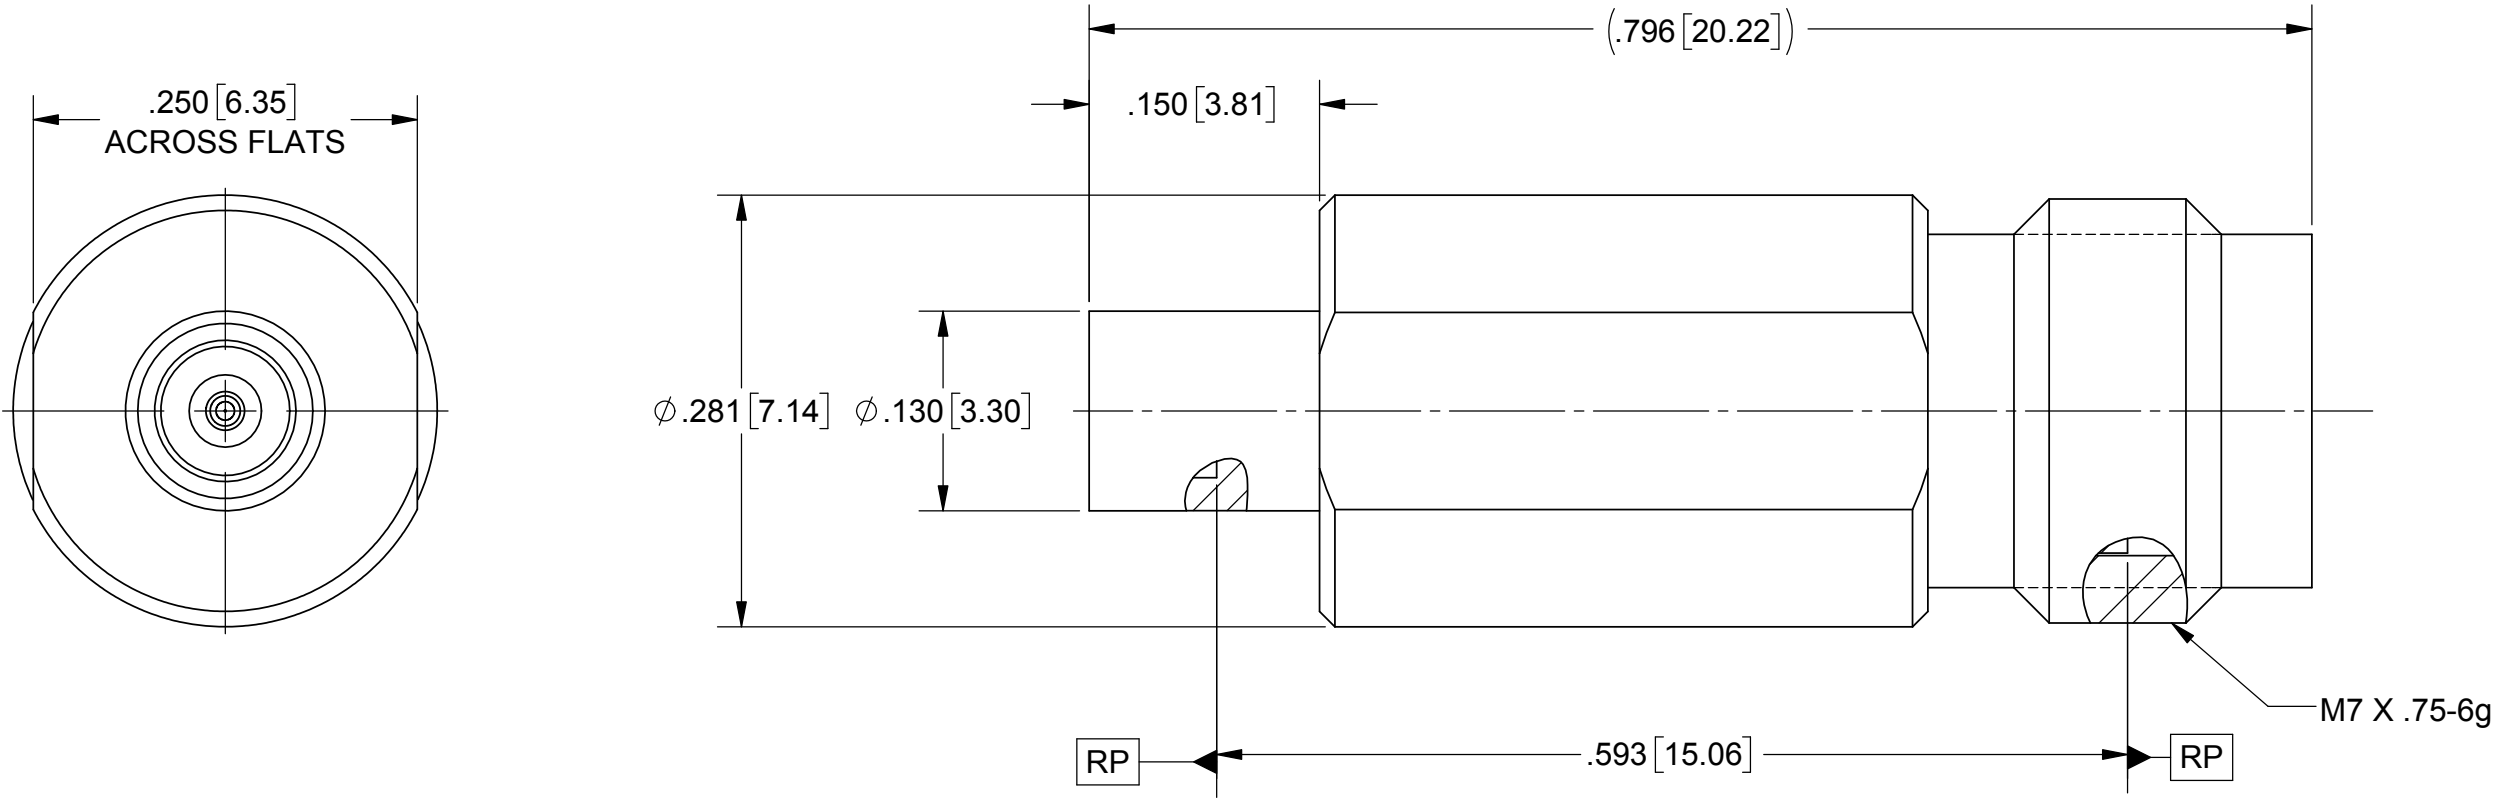

MATERIAL:

- BODY:

CONTACT:

INSULATOR:

DIELECTRIC BEAD:
- STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1, OR ASTM A582 TYPE 303, CONDITION A.

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04.

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B.

POLYETHERIMIDE (ULTEM 1000) PER ASTM D5205.

FINISH:

- BODY:

CONTACT:
- PASSIVATED PER AMS-2700


GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

- IMPEDANCE:

FREQ. RANGE:
- 50 OHMS

DC TO 65.0 GHz.

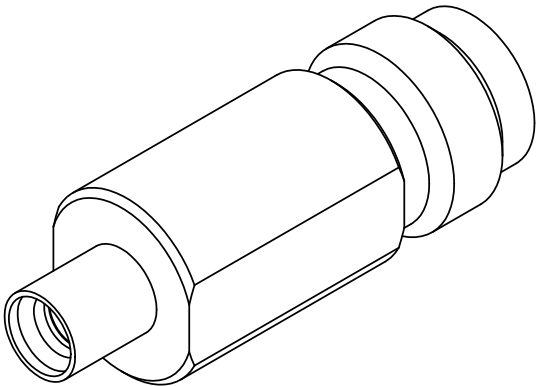

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' 	
-----------	-----------	---	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SF1132-6069](#)