
PRODUCT DATA DRAWING

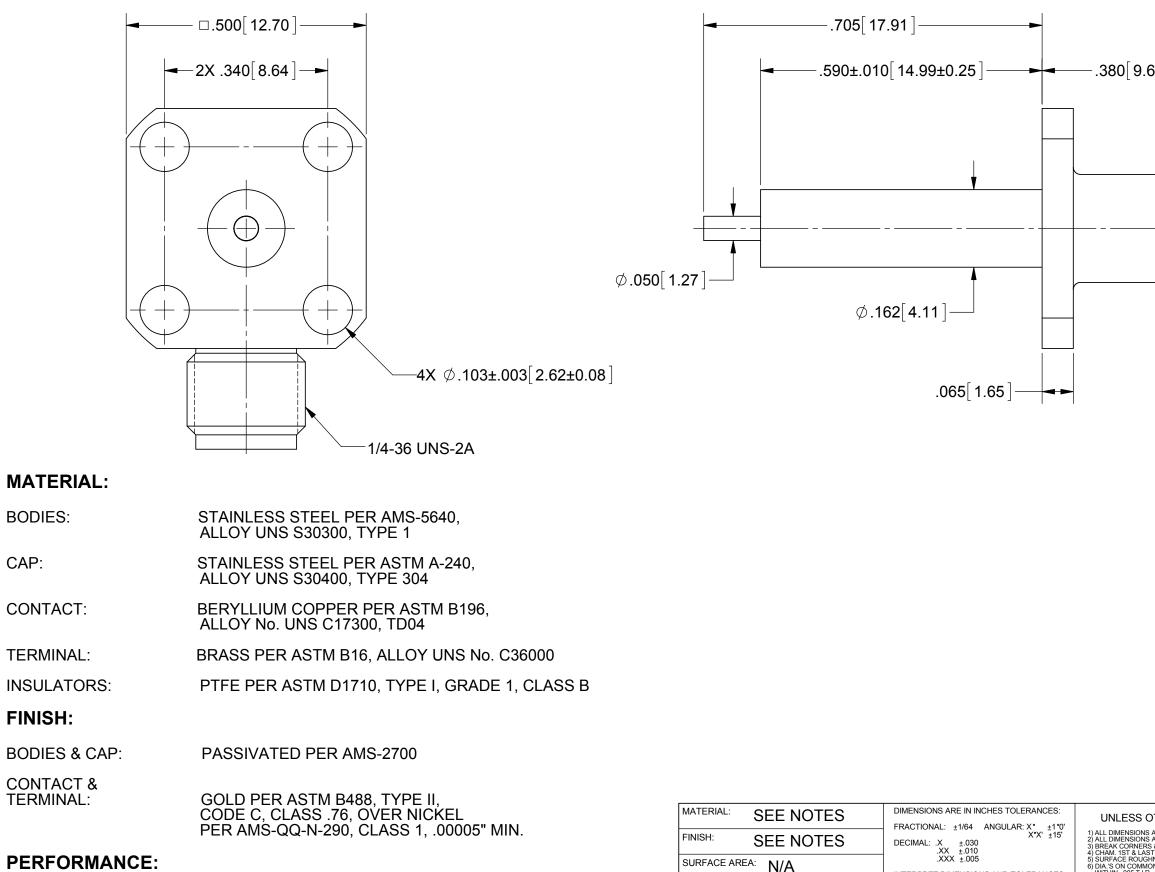

PERFORMANCE:

BODIES:

FINISH:

CAP:

IMPEDANCE: FREQ. RANGE:	50 OHMS DC TO 12.4 GHz				7) REMOVE ALL BUR
			PROPRIETARY	PER ASME Y14.5M - 1994	I) REMOVE ALL DOR
			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC.	THIRD ANGLE PROJECTION	DRAWN:
			ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		CHECKED
					APPROVE

SURFACE AREA: N/A

	1					
	REVISION HISTORY					
	REV	DESCRIPTION	DATE	APPROVED		
	Α	DCN 41793	10/15	DAL		
				1		
65]						
	-					
_			4			
H I						
- i						
H ¦						
-						
			15.24]			
		.000				
i		.460[11.68]				
<u> </u>		ــــــــــــــــــــــــــــــــــــــ				
		<u>†</u>]				
li l						
		│ ♥	1			
		i				

OTHERWISE SPECIFIED S ARE IN INCHES [MILLIMETERS] S ARE AFTER PLATING. SS & EDGES 005 R. MAX. ST THREADS. ST THREADS. HINESS 63-MIL-STD-10. ION CENTERS TO BE CONCENTRIC R. JRRS		Amphenol Amphenol 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409				
		TITLE: SMA JACK 4 HOLE FLANGE				
		MOUNT, RECEPTACLE				
BNK 10/21/15		CAPTIVATED CONTACT				
_	B 44 40 40 40 40 B	SIZE	CAGE CODE	DWG. NO.	00000	COOF
D:	DAL 10/21/15	В	95077		SF2960	-0025
ED:	SW 04/07/97	S	CALE: 5:1			SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SF2960-6025