


# **PRODUCT DATA DRAWING**

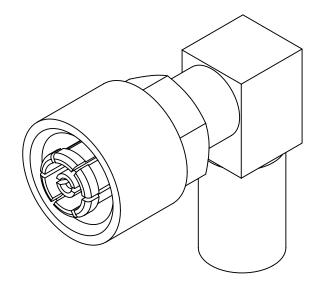

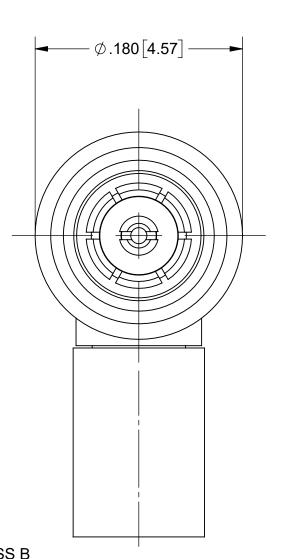

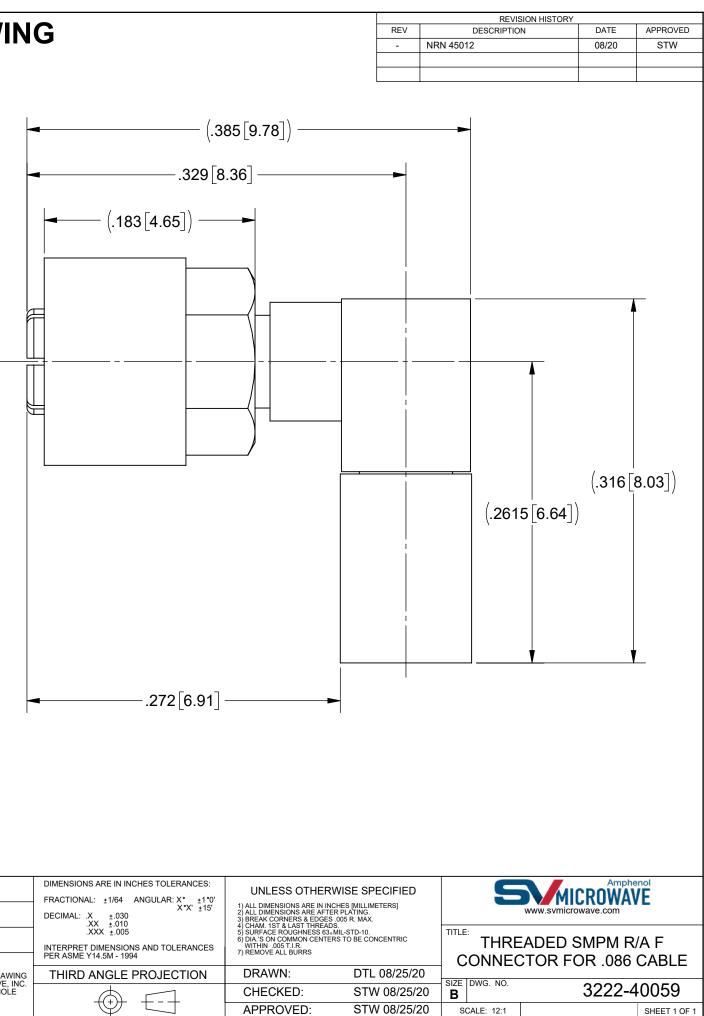

#### **MATERIAL:**

BODIES & CONTACTS:	
	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATORS:** 

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND. A **RETENTION NUT:** 

### FINISH:

BODIES &	
CONTACTS:	GOLD PER ASTM B488, TYPE II,
	CODE C, CLASS 1.27, ÓVER NIĆKEL
	PER AMŚ-QQ-N-290, CLASS 1, .00005" MIN.

**RETENTION NUT: PASSIVATED PER AMS-2700** 

#### **PERFORMANCE:**

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 26.5 GHz

MATERIAL: SEE NOTES FINISH: SEE NOTES SURFACE AREA: N/A	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X* ±1°0' X*X' ±15' DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES	UNLESS C 1) ALL DIMENSIONS 2) ALL DIMENSIONS 3) BREAK CORNERS 4) CHAM, 1ST & LAS 5) SURFACE ROUGH 6) DIA: S ON COMMC WITHIN 2005 T.J.R.
PROPRIETARY	PER ASME Y14.5M - 1994	7) REMOVE ALL BUF
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF	THIRD ANGLE PROJECTION	DRAWN:
	$\bigcirc \bigcirc \bigcirc \bigcirc$	CHECKED
SV MICROWAVE, INC IS PROHIBITED.		APPROVE

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 3222-40059