


ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
В	DCN 41727	10/15	DAL		



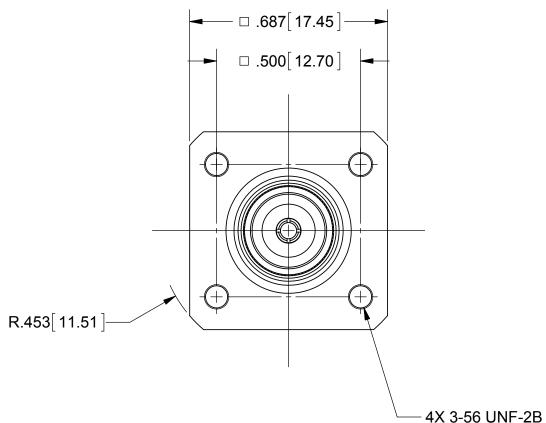

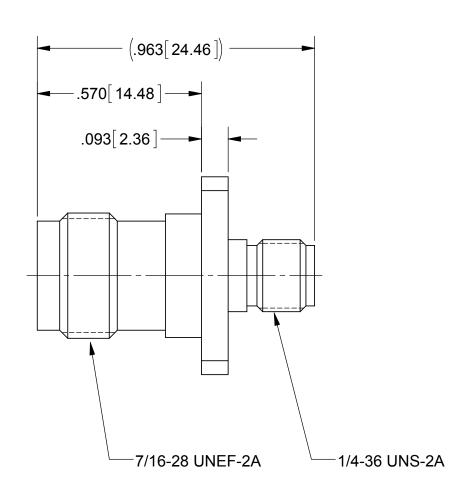

MATERIAL:

BODY & PRESS RING:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

FINISH:

BODY & PRESS RING:

PASSIVATED PER AMS-2700

CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 0.76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 15.0 GHz

MATERIAL:	SEE NOTES				
FINISH:	SEE NOTES				
SURFACE AR	^{EA:} N/A				
	PROPRIETARY				
IS THE SOLE P ANY REPRODU WITHOUT THE	THE INFORMATION CONTAINED IN THIS DRAW IS THE SOLE PROPERTY OF SV MICROWAVE, ANY REPRODUCTION IN PART OR AS A WHOL WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.				

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING, 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	GPF 10/02/15
	CHECKED:	DAL 10/02/15
	APPROVED:	DGG 05/09/78

UNLESS OTHERWISE SPECIFIED

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMA JACK TO PTNC JACK 4 HOLE FLANGE ADAPTER

SIZE CAGE CODE 95077		DWG. NO.	SF1102-6002	
S	CALE: 3:1			SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SF1102-6002