





PRODUCT DATA DRAWING



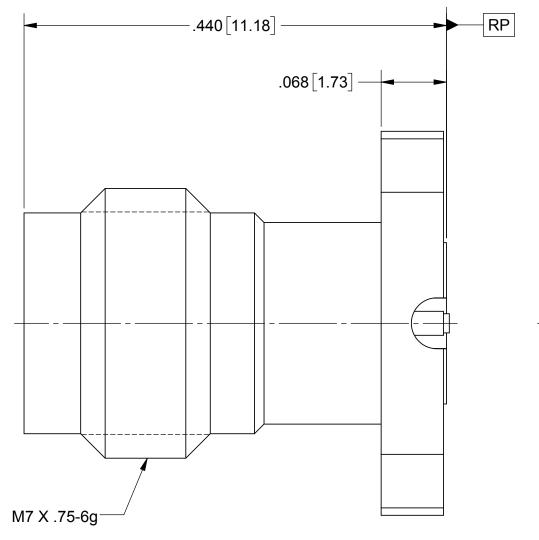

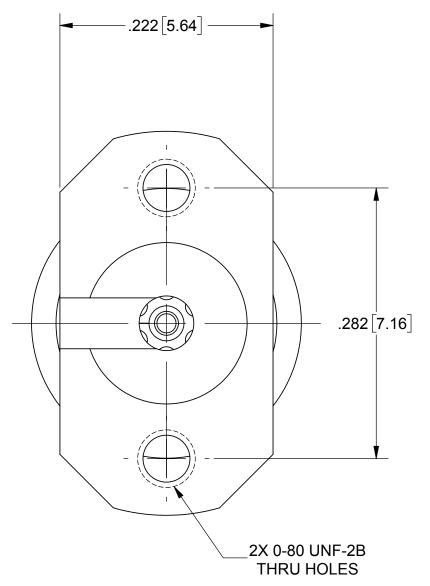

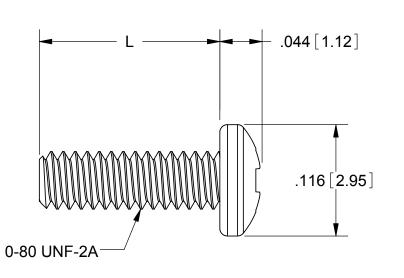

SCREW OPTIONS	L
FOR -1S	.188
FOR -2S	.250
FOR -3S	.438

MATERIAL:

BODIES & SCREWS: STAINLESS STEEL

CONTACT: **BERYLLIUM COPPER**

ULTEM **INSULATOR:**

FINISH:

BODIES & SCREWS: PASSIVATED

CONTACT: **GOLD OVER NICKEL**

SV P/N	DESCRIPTION	PCB THICKNESS
SF1621-60026-1S	INCL. TWO .188 SCREWS	.005 TO .123
SF1621-60026-2S	INCL. TWO .250 SCREWS	.034 TO .185
SF1621-60026-3S	INCL. TWO .438 SCREWS	.222 TO .373
SF1621-60026	NO SCREWS	.005 TO .373

DAL 12/08/16

NOTES:

1. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

MATERIAL: SEE N	OTES	DIMENSIONS ARE IN INCHES TOLERANCES:
FINISH: SEE N		FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' ±15' DECIMAL: .X ±.030 .XX +.010
SURFACE AREA: N/A		.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES
PROPRIETA	RY	PER ASME Y14.5M - 1994
THE INFORMATION CONTAINE		THIRD ANGLE PROJECTION
IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.	⊕ €-}	

NS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIED
IAL: ±1/64 ANGULAR: X° ±1°0′ X°X′ ±15′ X° ±15′	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & ENCES .005 R. MAX. 4) SUBFACOR COLGHNESS 63-MIL-STD-10. 6) DIA-S ON COMMON CENTERS TO BE CONCENTRIC WITHIN T.I.R. 7) REMOVE ALL BURRS

DRAWN:

CHECKED:

APPROVED:

ESS 63-MIL-STD-10. CENTERS TO BE CONCENTRIC	2.4mm JACK 2 HOLE FLANGE WITH MOUNTING SCREWS	
BNK 12/08/16		
DAL 12/08/16	SIZE CAGE CODE DWG. NO. SF1621-60026-XS	

SIZE CAGE CODE DWG. NO. SF162	4 COOOC VC
B 95077 SF 1621	1-60026-85
SCALE: 10:1	SHEET 1 OF 1

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

SF1621-60026-1S