
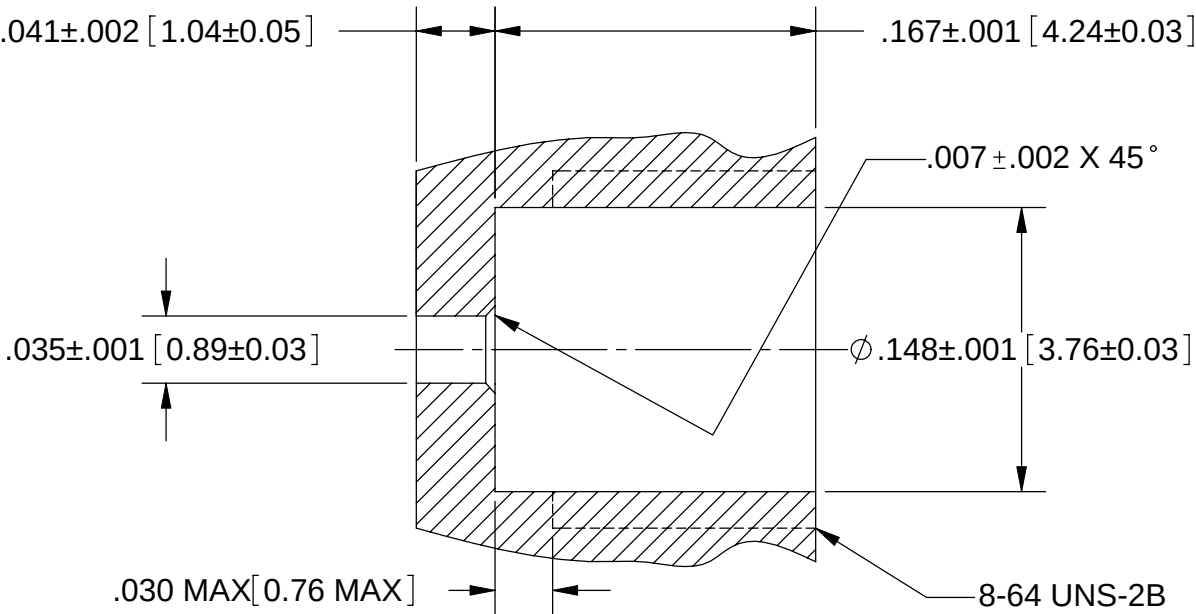


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 35964	07/08	STW

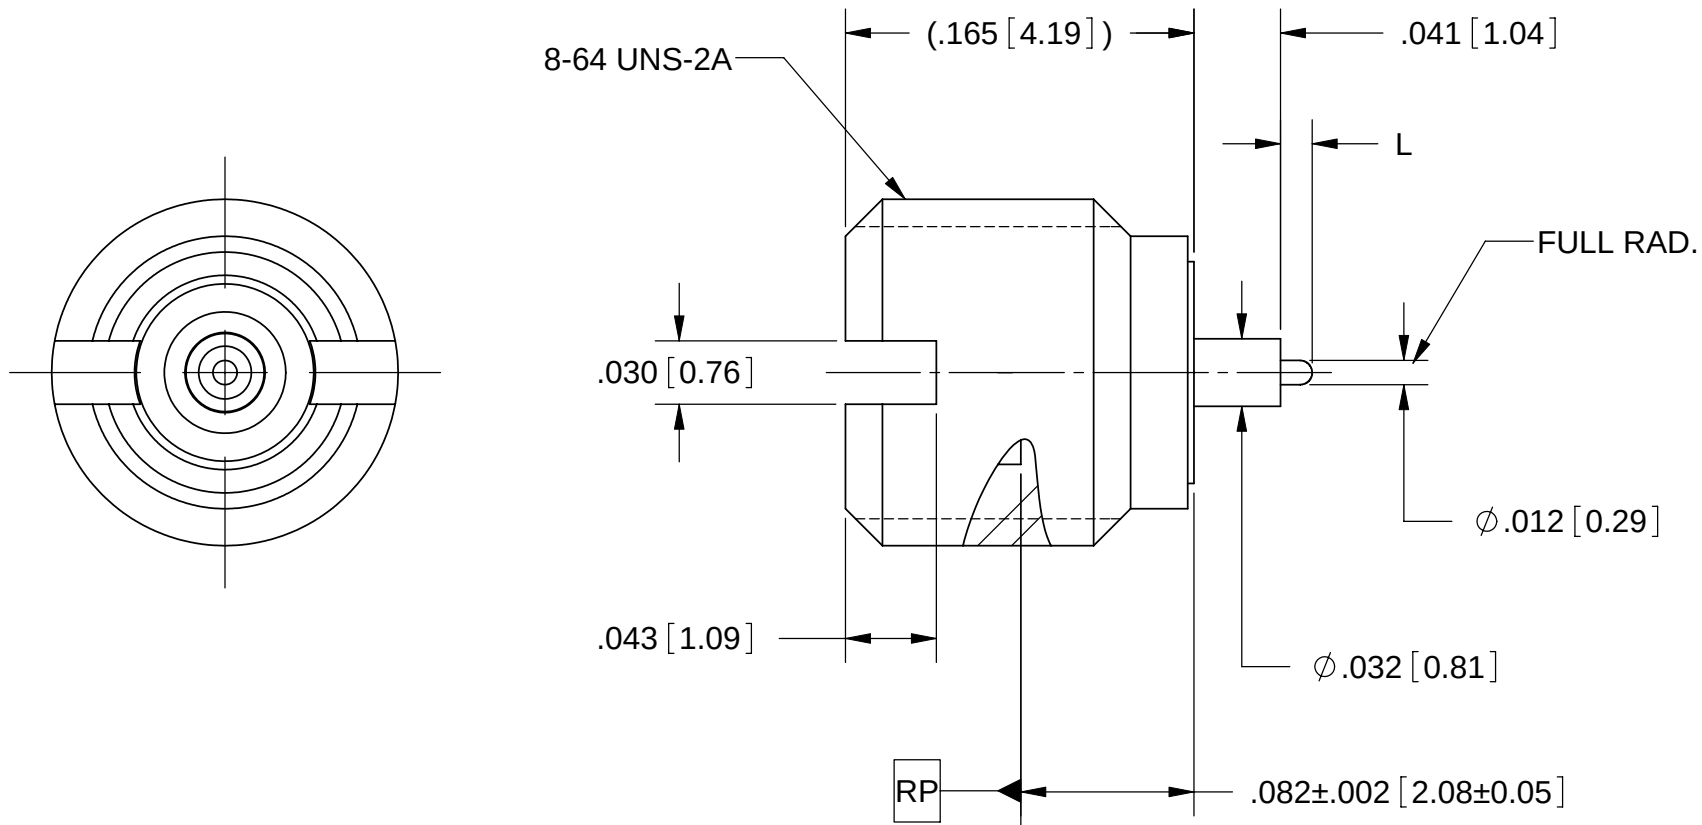

RECOMMENDED MOUNTING HOLE

MATERIAL:

- BODY:

CONTACT:

INSULATOR:
- STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300, TYPE 1

BERYLLIUM COPPER PER ASTM B196,
ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

- BODY:

CONTACT:
- PASSIVATED PER AMS-2700, TYPE 2

GOLD PER ASTM B488, TYPE II,
CODE C, CLASS 1.27; OVER NICKEL
PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

- IMPEDANCE:

FREQ. RANGE:

VSWR:

DWV:

OPERATING TEMP.:
- 50 OHMS

DC TO 40.0 GHz

1.25:1 DC TO 26.5 GHz

1.35:1 DC TO 40.0 GHz

325 VRMS

-55°C TO +125°C

SV PART NUMBER	INTERFACE	L
SF3211-60009	FD	.015"
SF3211-60010	FD	.065"
SF3211-60011	SB	.015"
SF3211-60012	SB	.065"

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SF3211-60011](#)