

PRODUCT DATA DRAWING

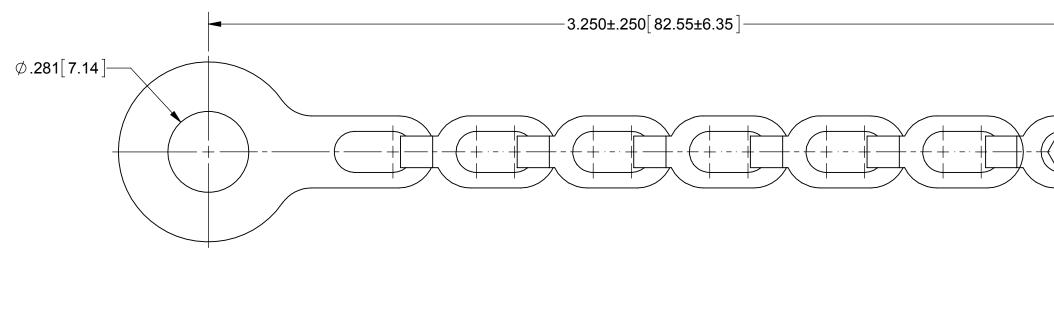



.312 HEX.-

MATERIAL:

- BODY, RIVET & COUPLING NUT: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
- LOCK RING: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
- GASKET: SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 60/70


SAFETY CHAIN & CHAIN TERMINATION: 300 SERIES STAINLESS STEEL


FINISH:

BODY, RIVET COUPLING NUT, SAFETY CHAIN & CHAIN TERMINATION: PASSIVATED PER AMS-2700

| MATERIAL: FINISH: | SEE NOTES SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 | 1) ALL DIMENSIONS ARE IN II 2) ALL DIMENSIONS ARE AFT | | 2400 | Microwave, I Centrepark West Drive, Suite 1 West Palm Beach, FL 33409 | |
|----------------------|--|---|--|--------------|---|---|--------------|
| | | XX ±010 XXX ±005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 | 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. IST & LAST THREADS. 5) SURFACE ROUGHNESS 63∗MIL-STD-10. 6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS | | TITLE: SMA PLUG, NON SHORTING DUST CAP | | |
| THE INFORMA | PROPRIE IART MATION CONTAINED IN THIS DRAWING E PROPERTY OF SV MICROWAVE, INC. IDUCTION IN PART OR AS A WHOLE HE WRITTEN PERMISSION OF VAVE, INC IS PROHIBITED. | THIRD ANGLE PROJECTION | DRAWN: | FED 03/15/11 | WITH SAFETY CHAIN | | Ν |
| ANY REPRODU | | | CHECKED: | PJS 03/15/11 | B 95077 | M39012/2 | 25-3025 |
| | | | APPROVED: | PJS 03/15/11 | SCALE: 3:1 | | SHEET 1 OF 1 |

| REVISION HISTORY | | | | | | | |
|------------------|-------------|-------|----------|--|--|--|--|
| REV | DESCRIPTION | DATE | APPROVED | | | | |
| - | DCN 38089 | 03/11 | PJS | | | | |
| | | | | | | | |
| | | | | | | | |





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: <u>M39012/25-3025</u>