



ROHS COMPLIANT

PRODUCT DATA DRAWING



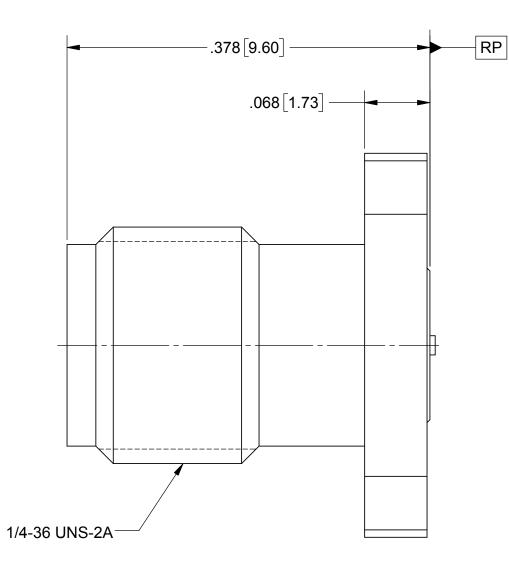

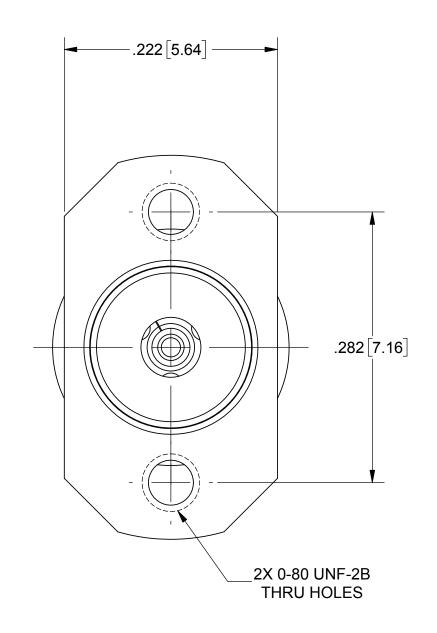

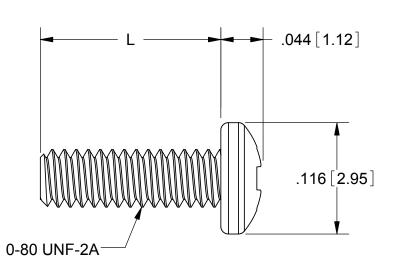

SCREW OPTIONS	L
FOR -1S	.188
FOR -2S	.250
FOR -3S	.438

MATERIAL:

BODIES & SCREWS: STAINLESS STEEL

CONTACT: BERYLLIUM COPPER

INSULATOR: ULTEM

FINISH:

BODIES & SCREWS: PASSIVATED

CONTACT: GOLD OVER NICKEL

SV P/N	DESCRIPTION	PCB THICKNESS
SF1521-60061-1S	INCL. TWO .188 SCREWS	.023 TO .123
SF1521-60061-2S	INCL. TWO .250 SCREWS	.085 TO .185
SF1521-60061-3S	INCL. TWO .438 SCREWS	.273 TO .373
SF1521-60061	NO SCREWS	.023 TO .373

NOTES:

1. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	
FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX +.010	
SURFACE AREA: N/A		.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES	
	PROPRIETARY	PER ASME Y14.5M - 1994	
	TION CONTAINED IN THIS DRAWING PROPERTY OF SV MICROWAVE. INC.	THIRD ANGLE PROJECTION	
ANY REPRODU	JCTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF		
SV MICROWAV	/E, INC IS PROHIBITED.		

: X° ±1°0' X°X' ±15'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10.	
LERANCES	6) DIA.'S ON COMMON CE WITHIN T.I.R. 7) REMOVE ALL BURRS	NTERS TO BE CONCENTRIC
CTION	DRAWN:	BNK 12/08/16

CHECKED:

APPROVED:

DAL 12/08/16



2.92mm JACK 2 HOLE FLANGE WITH MOUNTING SCREWS

SIZE B	95077	DWG. NO.	SF1521-60	0061-XS
SCALE: 10:1				SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

SF1521-60061-2S