
PRODUCT DATA DRAWING

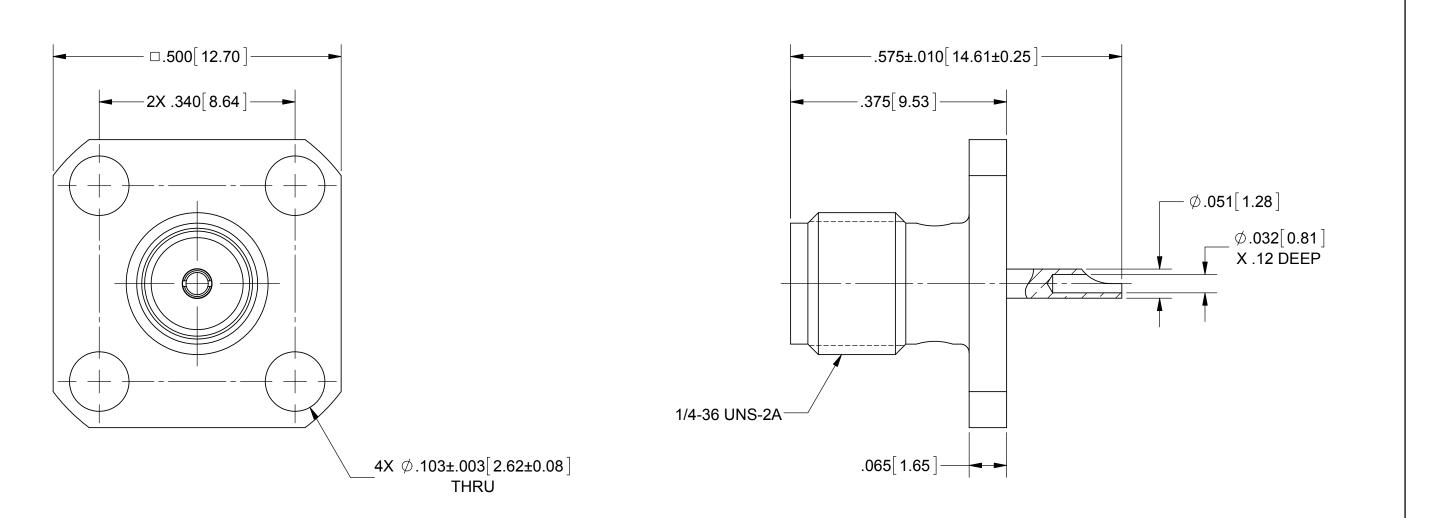

MATERIAL:

- BODY: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
- CONTACT: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
- INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY: PASSIVATED PER AMS-2700

CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 18.0 GHz

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X° +1°0'	UNLESS (
FINISH: SEE NOTES	X*X' ±15' DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS 2) ALL DIMENSIONS 3) BREAK CORNER 4) CHAM, 1ST & LAS
SURFACE AREA: N/A	.XXX ±.005	5) SURFACE ROUG 6) DIA.'S ON COMM WITHIN .005 T.I.I 7) REMOVE ALL BU
PROPRIETARY	PER ASME Y14.5M - 1994	T) REMOVE ALL BO
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC.	THIRD ANGLE PROJECTION	DRAWN:
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		CHECKED
		APPROVE

REVISION HISTORY						
REV	DESCRIPTION	DATE	APPROVED			
Α	DCN 41793	10/15	DAL			

COTHERWISE SPECIFIED NS ARE IN INCHES [MILLIMETERS] NS ARE AFTER PLATING. SRS & EDGES.005 R. MAX. AST THREADS. JGHNESS 63MIL-STD-10. MON CENTERS TO BE CONCENTRIC JR SURRS		TITLE	TITLE: SMA JACK 4 HOLE FLANGE SOLDER POT			
	BNK 10/21/15					
D:	DAL 10/21/15	SIZE B	CAGE CODE 95077	DWG. NO.	SF2950	-6081
/ED:	SW 04/07/97	S	CALE: 6:1			SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SF2950-6081