
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/17	GPF
Α	DCN 46820	09/17	STW
		·	

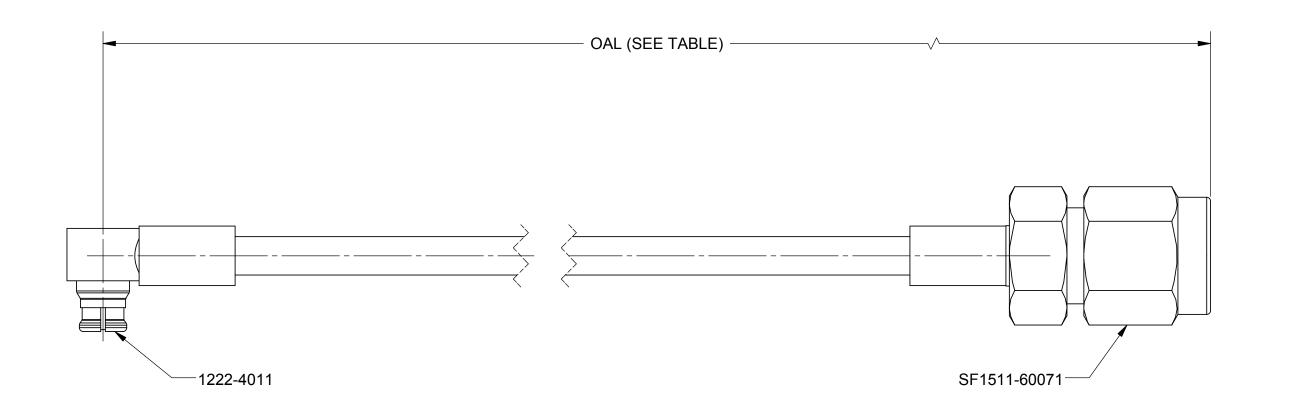

MATERIAL:

CONNECTORS: 2.92mm STRAIGHT PLUG (SF1511-60071) SMP R/A JACK (1222-4011)

T-FLEX 405 (200-70-139) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 26.5 GHz.

				SB/PN	L (OAL)
				7012-1287	6.000"
				7012-1288	12.000"
				7012-1289	24.000"
MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIE	-n	Amphenol
1	022.10.20	FRACTIONIAL 4/04 ANIOULAD. VA 4801	ONLEGO OTTIENWICE OF EOIL IE		MICDUMYANE

	FINISH: SEE NOTES SURFACE AREA: N/A PROPRIETARY	FRACTIONAL: ±1/64 ANGULAR: X* ±1°0' DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN IN 2) ALL DIMENSIONS ARE AFT 3) BREAK CORNERS & EDGES 4) CHAM. 1ST & LAST THREAK 5) SURFACE ROUGHNESS 63. 6) DIA. S ON COMMON CENTE WITHIN. 005 T.I.R. 7) REMOVE ALL BURRS	S .005 R. MAX. DS. •MIL-STD-10.
IS THE ANY RI WITHO	THE INFORMATION CONTAINED IN THIS DRAWING	THIRD ANGLE PROJECTION	DRAWN:	VB 06/02/17
	IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		CHECKED:	GPF 06/02/
	SV MICROWAVE, INC IS PROHIBITED.		APPROVED:	GPF 06/02/

ASIVIE 1 14.5IVI - 1994	,	
IIRD ANGLE PROJECTION	DRAWN:	VB 06/02/17
	CHECKED:	GPF 06/02/17
	APPROVED:	GPF 06/02/17



SMP R/A FEM TO 2.92mm MALE FOR T-FLEX 405

SIZE CAGE CODE DWG. NO. B 95077 7012-1287-1289 SCALE: 4:1 SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7012-1287