

ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY								
REV	DESCRIPTION	DATE	APPROVED					
-	DCN 40883	10/14	STW					

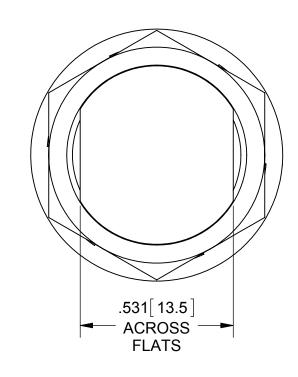

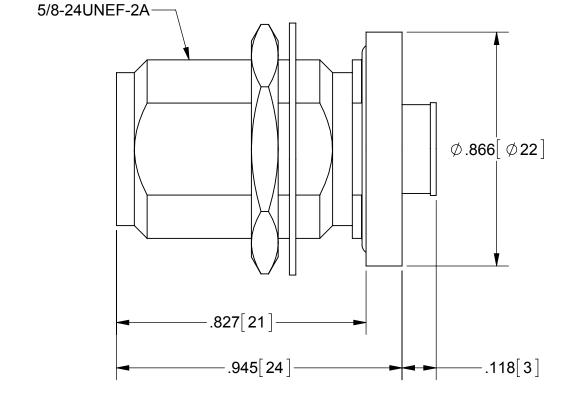

MATERIAL:

BODY: BRASS

CONTACT: BERYLLIUM COPPER

INSULATOR: PTFE

FINISH:

BODY: NICKEL

CONTACT: GOLD

PERFORMANCE:

OPERATING TEMP.: -55°C TO +125°C

NOTES:

1. INTERFACE : IEC 169-16 MIL-C-39012, N

MATERIAL: SEE NOTES FINISH: SEE NOTES		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0′	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAMA. IST & LAST THREADS. 5) SIMPLE SOLITION OF THE STORE .005 PLANTED .0		SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409		
		X°X' ±15' DECIMAL: .X ±.030 .XX ±.010					
SURFACE AREA: N/A		.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994			N JACK BULKHEAD FOR		
	PROPRIETARY ORMATION CONTAINED IN THIS DRAWING SOLE PROPERTY OF SV MICROWAVE, INC. PRODUCTION IN PART OR AS A WHOLE THE WRITTEN PERMISSION OF SOWAVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN:	MAL 10/23/14	ϕ .085 CABLE (SOLDER)		
ANY REPROD		+ - - - - - - - - - -	CHECKED:	STW 10/23/14	SIZE CAGE CODE DWG. NO. 5021-00		026
			APPROVED:	STW 10/23/14	SCALE: 3:1		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 5021-00026