
PRODUCT DATA DRAWING

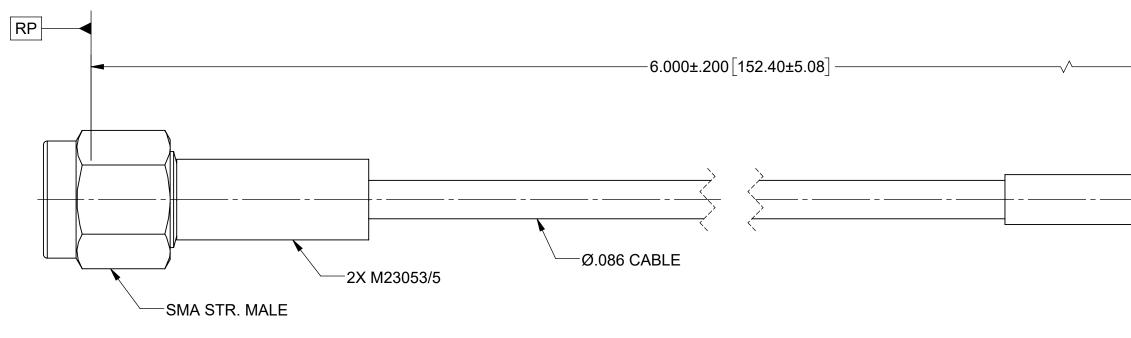

SMA BLKHD STR. FEM

MATERIAL:

CONNECTORS: SMA STR. MALE (SF2906-6002) SMA BULKHEAD STR. FEMALE (2921-61619)

CABLE: FLEXIBLE Ø.086 CABLE

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE: VSWR: INSERTION LOSS:	50 OHMS DC TO 18.0 GHz. 1.40:1 MAX. DC TO 18.0 GHz. .97dB MAX. DC TO 18.0 GHz.	MATERIAL:	SEE NOTES	DIMENSIONS
		FINISH:	SEE NOTES	DECIMAL: .X
		SURFACE AREA: N/A		.X .X INTERPRET [
		PROPRIETARY		PER ASME Y
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD A

EE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X° +1°0'	UNLESS O
EE NOTES	DECIMAL: X ±.030 .XX ±.010	1) ALL DIMENSIONS A 2) ALL DIMENSIONS A 3) BREAK CORNERS 4) CHAM, 1ST & LAST
N/A	.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	5) SURFACE ROUGH 6) DIA.'S ON COMMOI WITHIN .005 T.I.R. 7) REMOVE ALL BURF
PRIETARY	FER ASME 114.5M - 1994	
CONTAINED IN THIS DRAWING	THIRD ANGLE PROJECTION	DRAWN:
RTY OF SV MICROWAVE, INC. N IN PART OR AS A WHOLE TEN PERMISSION OF		CHECKED:

	REV	DES	REVISION HIS	TORY DATE	APPROVED
	01	PRELIMINARY		11/20	STW
				RP	7
				KF	
				-	
ſ		_			
	IK				
	↓⊢			+	
 Í	1				
	(⊢	└──┤ /			
	Υ				
		—			
	4				
	/				
EMALE]				
OTHERWISE S				Amph	enol
ONS ARE IN INCHES [MILL DNS ARE AFTER PLATING				MICROWA microwave.com	VE
ERS & EDGES .005 R. MA LAST THREADS.	Х.				
UGHNESS 63∝MIL-STD-10 MMON CENTERS TO BE C ∵I.R. BURRS			MA MALE	TO SMA B	LKHD
				CABLE AS	
	RM 11/24/2				
	W 11/24/2	_		7029-	
/ED: ST	W 11/24/2	20 SCALE	4:1		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 7029-3541