
## **PRODUCT DATA DRAWING**

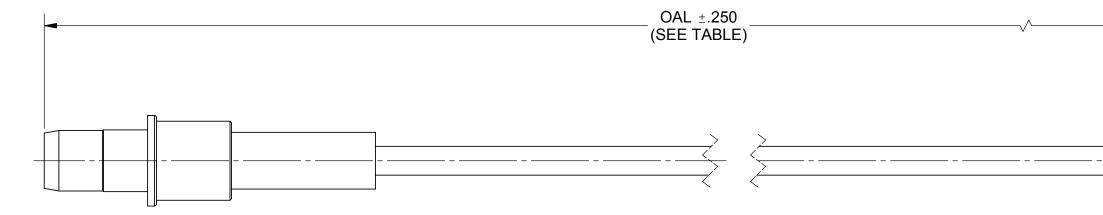

## MATERIAL:

CONNECTORS: BMA (SIZE 8) D38999 PIN CONTACT (SF9421-6000)

SMA PLUG (SF2906-6002)

CABLE: T-FLEX 405

SHRINK TUBING: M23053/5

## **PERFORMANCE:**

IMPEDANCE:50 OHMSFREQ. RANGE:DC TO 18.0 GHz

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X° +1°0'	UNLESS OTHE
FINISH:	SEE NOTES	X°X' ±15' DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS ARE IN 2) ALL DIMENSIONS ARE A 3) BREAK CORNERS & EDO 4) CHAM. 1ST & LAST THR
SURFACE AREA: N/A		.XXX ±.005	5) SURFACE ROUGHNESS 6) DIA.'S ON COMMON CEN WITHIN .005 T.I.R.
PROPRIETARY		PER ASME Y14.5M - 1994	7) REMOVE ALL BURRS
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		THIRD ANGLE PROJECTION	DRAWN:
			CHECKED:
	, INC IS PROHIBITED.		APPROVED:

	DEV		SION HIST	ORY DATE				
	REV	DESCRIPTIO	IN	11/19	APPROVED DEF			
				I				
			•	-				
		/	_					
		f		וֹך				
	¯ <b></b> - <b>↓ ↓</b>							
_		N						
		V		IJ				
				_				
SV P/N		<b>^</b>						
			OAL					
7093-0180			12.000					
	F	7093-0181		24.0	00			
		1000-0101		Z4.0				
HERWISE SPI		D   🧲		MICROWA	VE			
E IN INCHES [MILLIME E AFTER PLATING. EDGES .005 R. MAX.	ETERS]		www.sv	microwave.com				
HREADS. SS 63√ MIL-STD-10.								
CENTERS TO BE CON	563 MIL-STD-10. INTERS TO BE CONCENTRIC TITLE: BMA (SIZE 8) D38999 PIN CONTACT TO SMA MALE FOR							
S.I 1	SJ 11/11/19 Ø.085 T-FLEX CABLE ASSEMBLY							
DEF 11/11/19		SIZE DWG. NO.		7093-01	80-0181			
	11/11/			1000-01	SHEET 1 OF 1			
	11/11/	JUNE JUNE			SHLET TUP I			

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 7093-0180