

PRODUCT DATA DRAWING



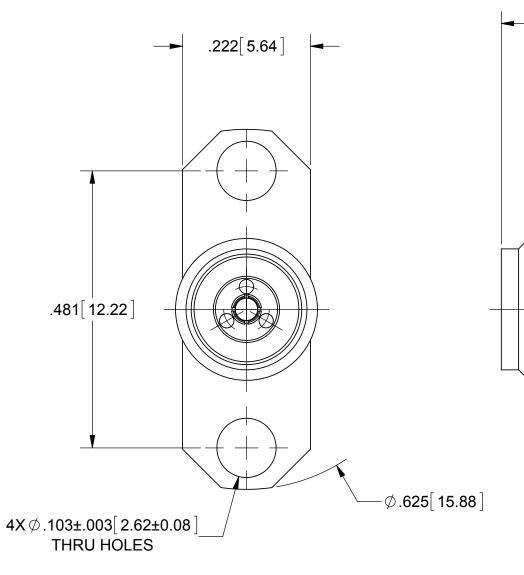

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY & INSERT:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

BEAD: ULTEM 1000 PER ASTM D5205

FINISH:

- BODY & INSERT: PASSIVATED PER AMS-2700
- CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.


PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 40.0 GHz

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X° +1°0'	UNLESS OTH
FINISH:	SEE NOTES	X°X' ±15' DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS ARE 2) ALL DIMENSIONS ARE 3) BREAK CORNERS & EE 4) CHAM. 1ST & LAST THF
SURFACE AREA: N/A		.XXX ±.005	5) SURFACE ROUGHNESS 6) DIA.'S ON COMMON CE WITHIN .005 T.I.R. 7) REMOVE ALL BURRS
PROPRIETARY		PER ASME Y14.5M - 1994	I) REMOVE ALL BOILE
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION	DRAWN:
			CHECKED:
			APPROVED:

REVISION HISTORY				
DESCRIPTION	DATE	APPROVED		
1727	10/15	DAL		
		DESCRIPTION DATE		

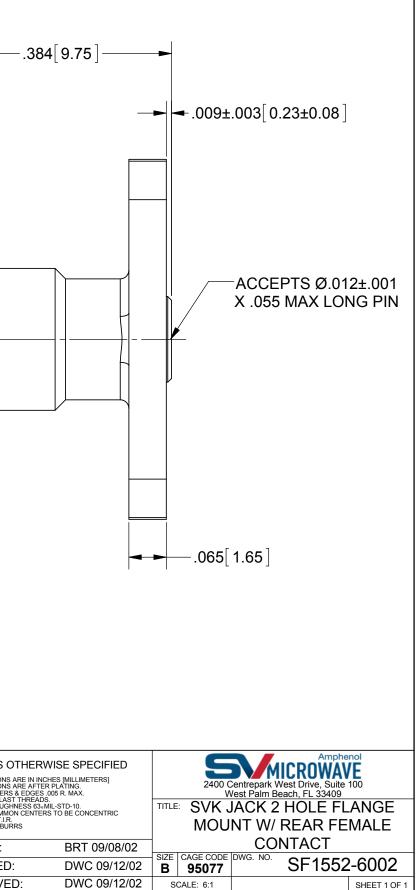

SCALE: 6:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SF1552-6002