
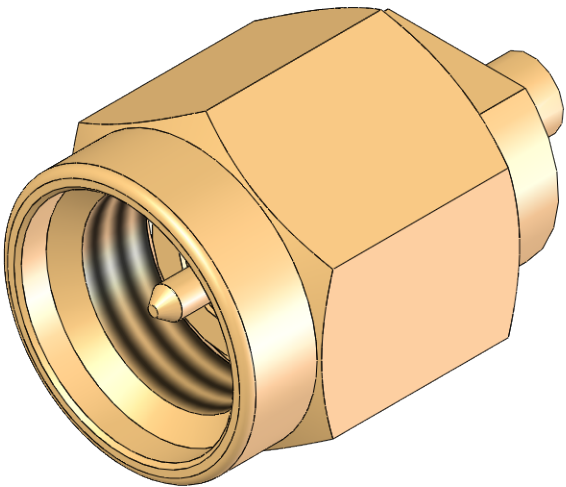
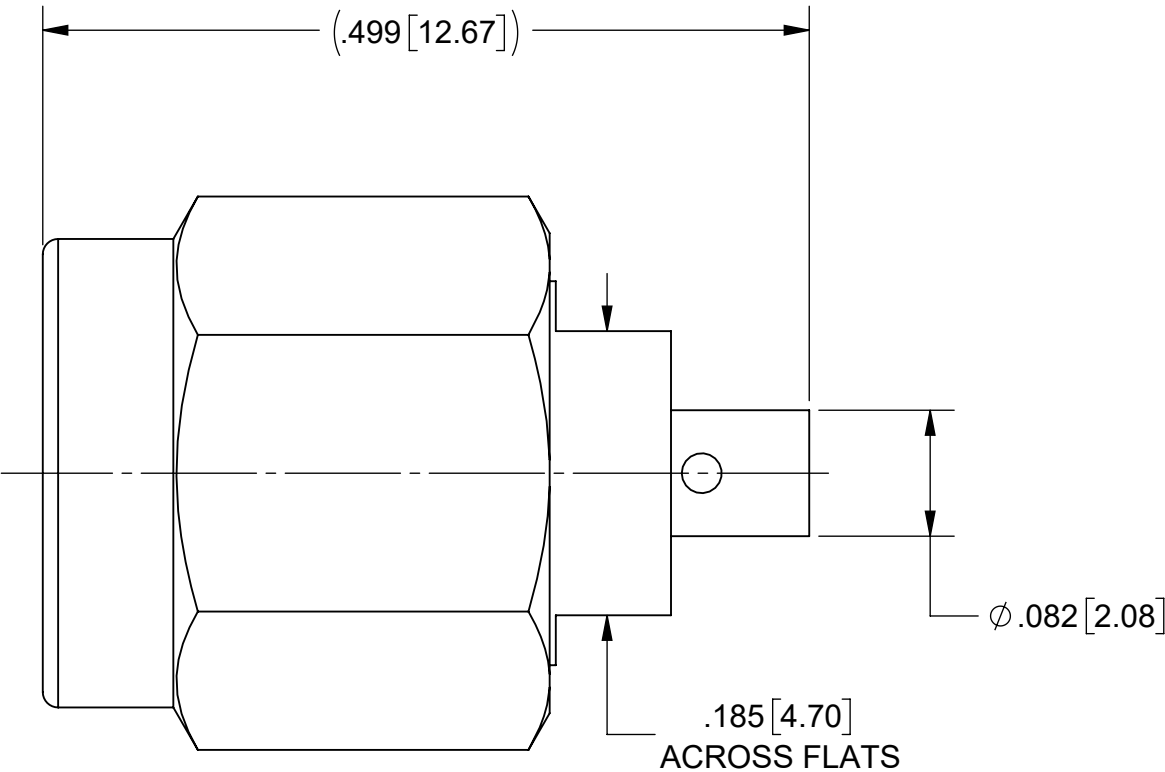


PRODUCT DATA DRAWING

| REVISION HISTORY | | | |
|------------------|-------------|-------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 01 | PRELIMINARY | 10/19 | GPF |
| - | NRN 44412 | 11/19 | STW |
| | | | |

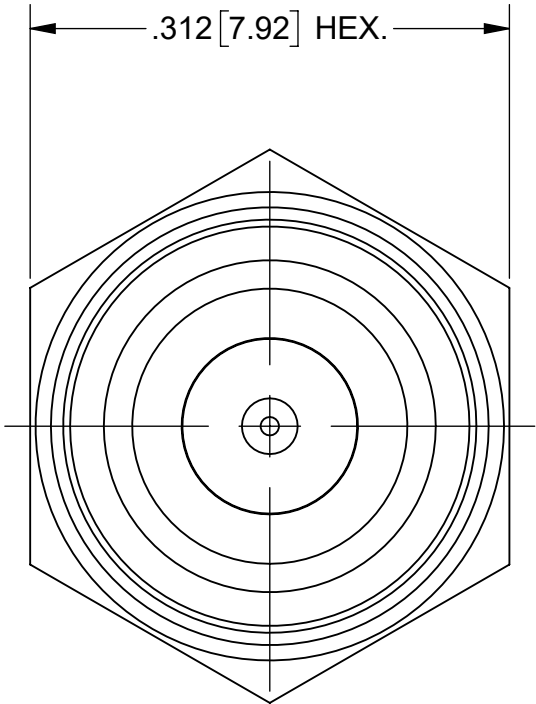

MATERIAL:

| | |
|--|------------------|
| BODY, CONTACT, COUPLING NUT & LOCK RING: | BERYLLIUM COPPER |
| INSULATOR: | PTFE |
| GASKET: | SILICONE RUBBER |

FINISH:

| | |
|-------------------------------|--------------------|
| BODY, CONTACT & COUPLING NUT: | GOLD (NICKEL FREE) |
|-------------------------------|--------------------|

PERFORMANCE:

| | |
|--------------|-----------------|
| IMPEDANCE: | 50 OHMS |
| FREQ. RANGE: | DC TO 18.0 GHz. |

| | | | |
|-----------|-----------|---|--|
| MATERIAL: | SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' | |
|-----------|-----------|---|--|

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[2911-40023](#)