
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/17	GPF

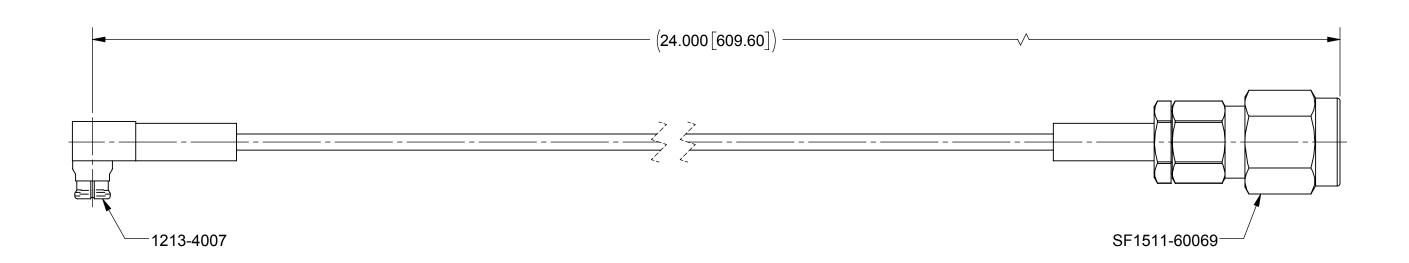

MATERIAL:

CONNECTORS: 2.92mm STRAIGHT MALE (SF1511-60069)

SMP R/A FEMALE (1213-4007)

CABLE: STANDARD FLEXTRA CABLE (200-70-214)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 26.5 GHz

MATERIAL:	SEE NOTES		
FINISH:	SEE NOTES		
STIDENCE ADEA: BILA			

SURFACE AREA: N/A

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0′
X°X′ ±15′

DECIMAL: .X +.030

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION DRAWN: VB 06/05/17

CHECKED: GPF 06/05/17

APPROVED: GPF 06/05/17

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63 MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

Amphenol William Park West Drive, Suite 100 West Palm Beach, FL 33409

SMP FEMALE R/A TO 2.92mm MALE FOR .047 CABLE ASSEMBLY

SIZE CAGE CODE DWG. NO. 7012-1290

SCALE: 1:1 SHEET 10

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7012-1290