
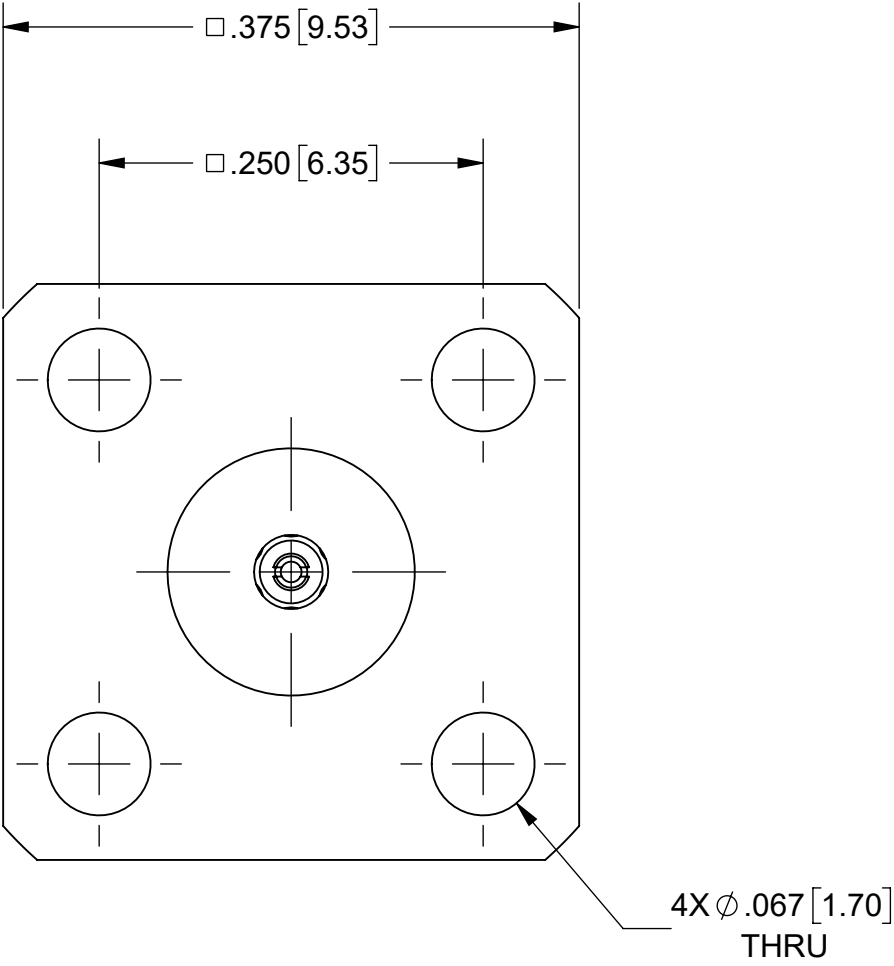
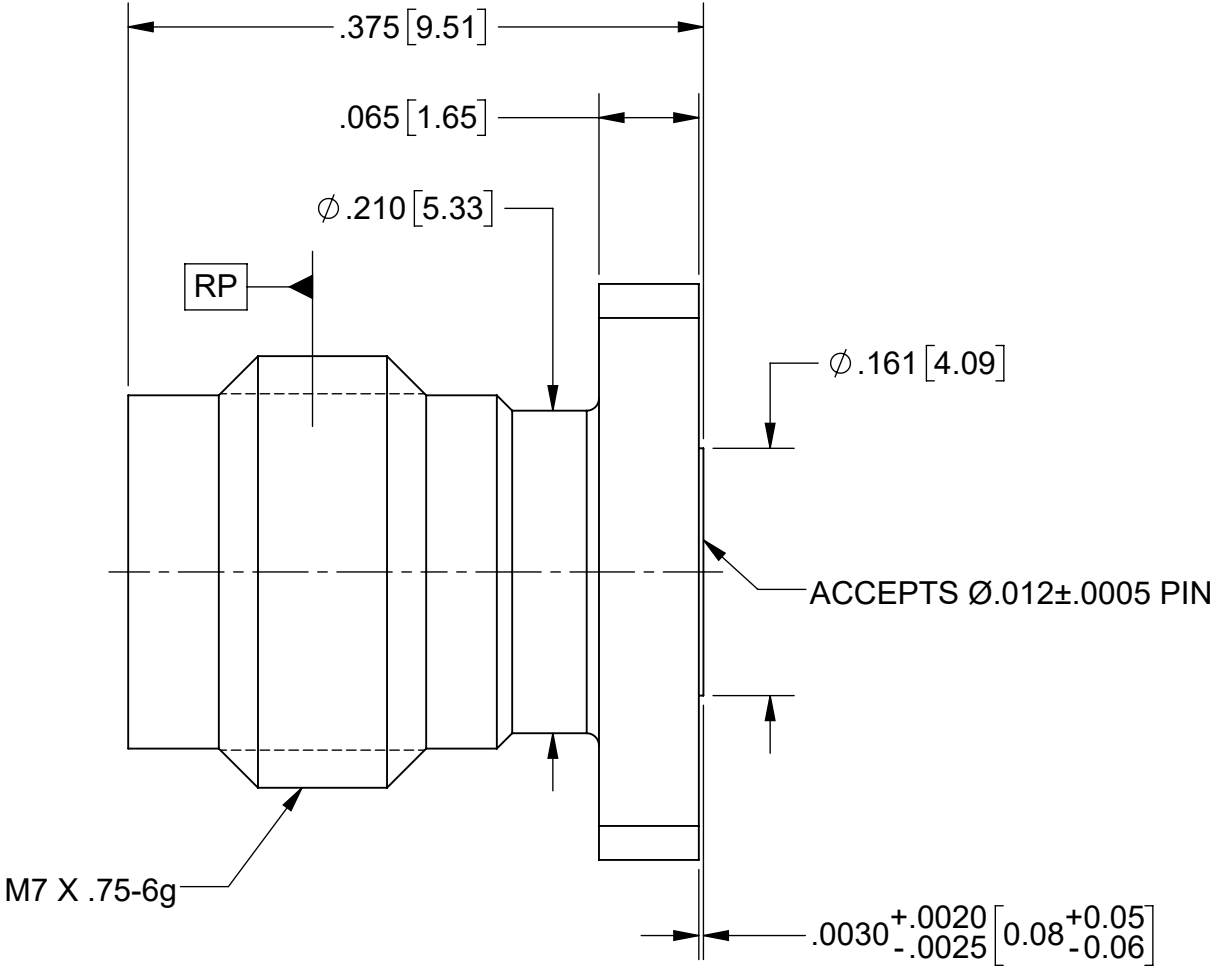


ROHS COMPLIANT

PRODUCT DATA DRAWING

| REVISION HISTORY | | | |
|------------------|-------------|-------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| - | NRN 45335 | 11/20 | STW |
| | | | |
| | | | |

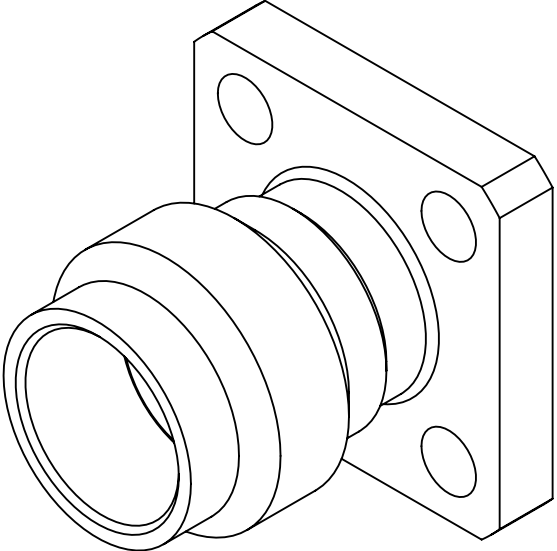

MATERIAL:

BODY & INSERT: STAINLESS STEEL

CONTACT: BERYLLIUM COPPER

INSULATOR: ULTEM 1000

FINISH:


BODY & INSERT: PASSIVATED

CONTACT: GOLD OVER NICKEL

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 50.0 GHz

| | | | | |
|---------------------|---|--|---|-------------------------------|
| MATERIAL: SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' | UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN T.I.R. 7) REMOVE ALL BURRS | <div> www.svmicrowave.com</div> <div>TITLE: 2.4 mm JACK 4-HOLE FL. MT. ACCEPTS Ø.012±.0005 PIN</div> | |
| FINISH: SEE NOTES | DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005 | INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 | | SIZE DWG. NO. B 1621-60072 |
| SURFACE AREA: N/A | THIRD ANGLE PROJECTION | DRAWN: SJ 11/13/20 CHECKED: STW 11/13/20 APPROVED: STW 11/13/20 | | SCALE: 8:1 SHEET 1 OF 1 |

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[1621-60072](#)