

ROHS COMPLIANT

PRODUCT DATA DRAWING

	REVISION HISTORY		
REV	DESCRIPTION	DATE	APPROVED
01	PRELIMINARY	12/10	PJS

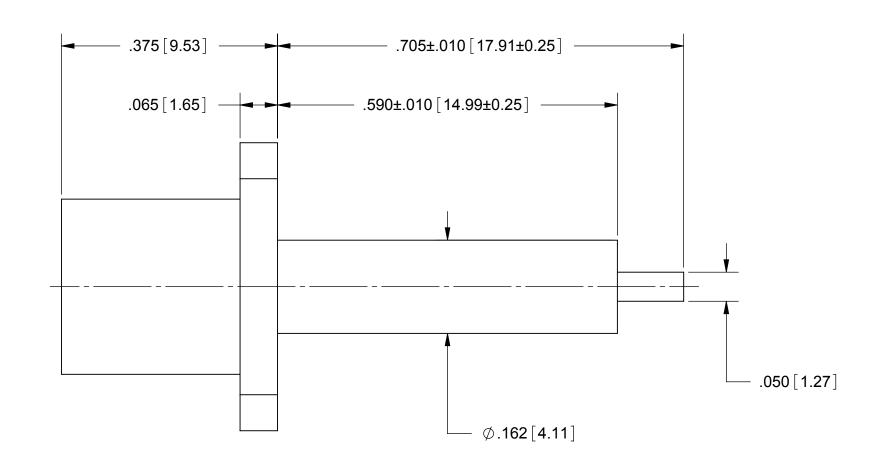

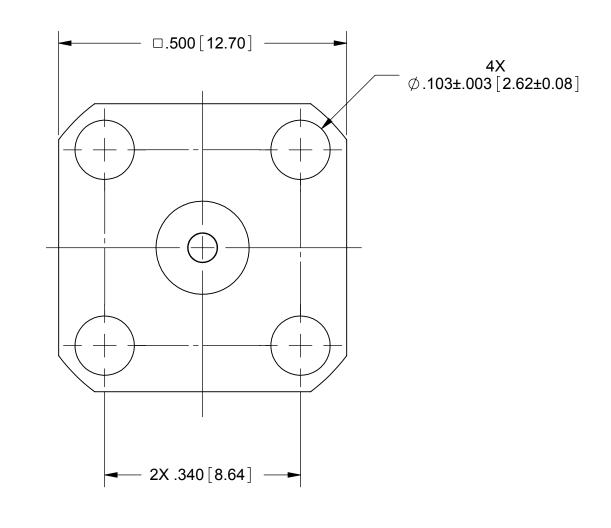

MATERIAL:

STAINLESS STEEL PER AMS-5640, BODY:

ALLOY UNS S30300, TYPE 1

CONTACTS: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

FINISH:

CONTACTS: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL

PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE:

DC TO 18.0 GHz

MATERIAL: SEE NOTES				
FINISH: SEE NOTES				
SURFACE AREA: N/A				
PROPRIETARY				
THE INFORMATION CONTAINED IN THIS DRAWII IS THE SOLE PROPERTY OF SV MICROWAVE, IN ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.				

	DIMENSIONS ARE IN INCHES TOLERANCES:					
_	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'					
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005					
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994					
	THIRD ANGLE PROJECTION					

CTIONAL: ±1/64 ANGULAR: X* ±1*0' IMAL: .X ±0.30	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EOGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
HIRD ANGLE PROJECTION	DRAWN:	PJS 12/3/10
A 17	CHECKED:	
	APPROVED:	

UNLESS OTHERWISE SPECIFIED

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

BMA JACK 4 HOLE FLANGE MOUNT

SIZE CAGE CODE DWG. NO. B 95077 SF1750-6101 SCALE: 6:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SF1750-6101