
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 42259	05/18	STW

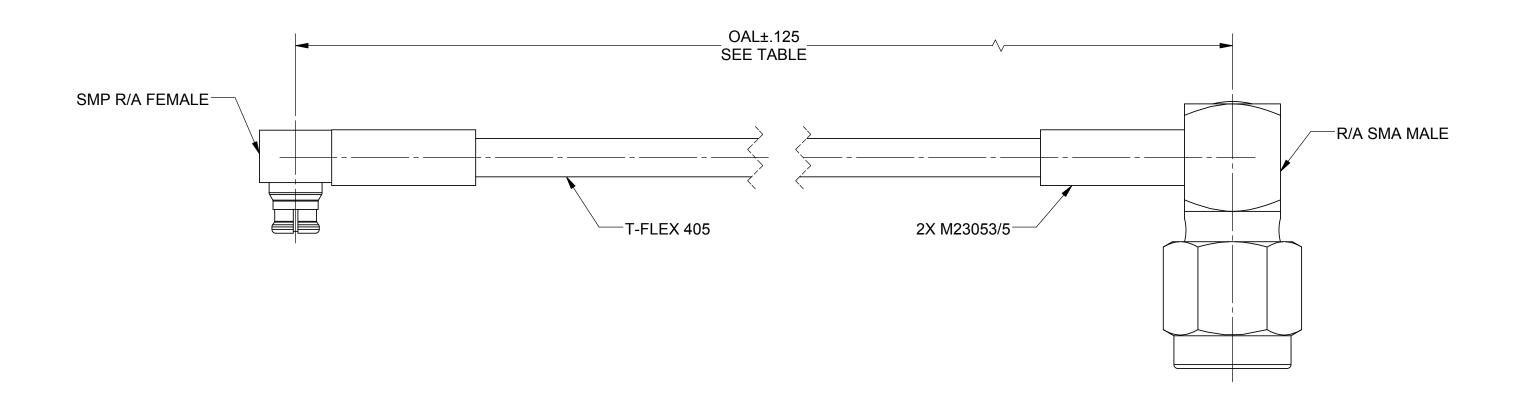

MATERIAL:

SMP FEMALE (1222-4011), SMA MALE (SF2915-6001) CONNECTORS:

CABLE: T-FLEX 405

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 12.4 GHz

1.50:1 MAX, DC TO 12.4 GHz VSWR:

INSER. LOSS: SEE TABLE

MATERIAL: SEE NOTES
FINISH: SEE NOTES
SURFACE AREA: N/A
PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.
-

\	DIMENSIONS ARE IN INCHES TOLERANCES:
)	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: X ±.030 .XX ±.010 .XXX +.005
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994
RAWING	THIRD ANGLE PROJECTION

UNLESS OTHERWI 1) ALL DIMENSIONS ARE IN INCHE 2) ALL DIMENSIONS ARE AFTER P 3) BREAK CORNERS & EDGES .00 4) CHAM 151 & LAST THREADS. 5) SURFACE ROUGHNESS 63MIL 6) DIA: S ON COMMON CENTERS WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	ES [MILLIMETERS] LATING. 5 R. MAX. -STD-10.
DRAWN:	DEF 05/07/18

STW 05/07/18

STW 05/07/18

CHECKED:

APPROVED:

SV P/N

7012-1327

7012-1328

7012-1329

Amphenol MICROWAVE 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409
SMP R/A FEM TO SMA R/A

MAX INSER. LOSS

0.85 dB

1.27 dB

2.12 dB

TABLE 1

OAL

6.000

12.000

24.000

MALE FOR T-FLEX 405
W/ (22 1 31(1 1 22/(100

SIZE B	95077	DWG. NO. 7012-132	27-1329
S	CALE: 1:2		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7012-1329