


## **PRODUCT DATA DRAWING**

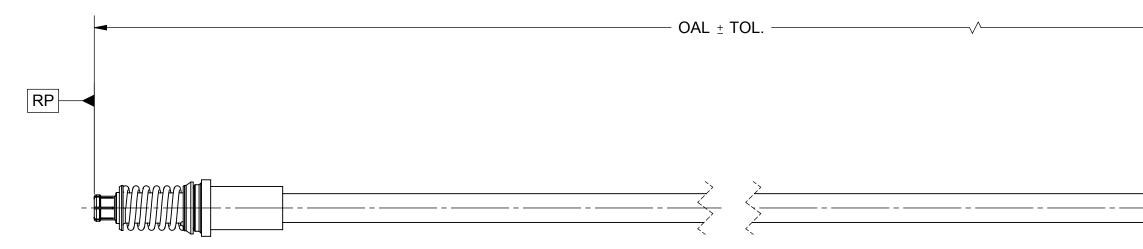

C	TOL.	
FROM:	TO:	
MIN	11.900"	± .100"
12.000"	99.900"	± .500"


#### **MATERIAL:**

CONNECTORS :	SMPM FEMALE VITA SMA STRAIGHT MALE	(3221-40022) (SF2906-6002)		
CABLE:	T-FLEX 405 CABLE	(200-70-139)		
SHRINK TUBING:	M23053/5		MATERIAL:	SEE
			FINISH:	SEE
PERFORMANCE:			SURFACE ARE	<sup>EA:</sup> N/
IMPEDANCE: FREQ. RANGE:	50 OHMS DC TO 26.5 GHz		THE INFORMATI IS THE SOLE PR ANY REPRODUC	ROPERTY CTION IN F

#### NOTES:

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	UNLESS O
FINISH:	SEE NOTES	X°X' ±15' DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS A 2) ALL DIMENSIONS A 3) BREAK CORNERS 4) CHAM, 1ST & LAST
SURFACE AREA: N/A		.XXX ±.005	5) SURFACE ROUGH 6) DIA.'S ON COMMOI WITHIN .005 T.I.R. 7) REMOVE ALL BUR
PROPRIETARY		PER ASME Y14.5M - 1994	,
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION	DRAWN:
			CHECKED:
			APPROVED

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 42145	03/16	DAL

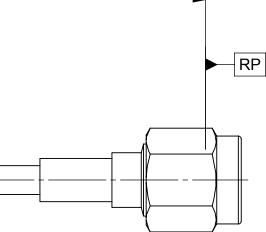

# PART NUMBERS TO BE 7032-6729-XXX. (XXX TO BE LENGTH). EXAMPLE, 7032-6729-121 WILL BE A 12.100" CABLE ASSEMBLY.

OTHERWISE SPECIFIED NS ARE IN INCHES [MILLIMETERS] NS ARE AFTER PLATING RS & EDGES .005 R. MAX. AST THREADS. GHNESS 63-MIL-STD-10. MON CENTERS TO BE CONCENTRIC I.R. JURRS		Amphenol MICROWAVE 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409				
		TITLE: SMPM FEMALE VITA SNAP-IN TO SMA MALE Ø.086 CABLE ASSEMBLY				
	ELA	03/07/16				
D:	DAL	03/07/16	SIZE <b>B</b>	CAGE CODE 95077	DWG. NO. 7032-672	29-XXX
ED:	DAL	03/07/16	S	CALE: 3:1		SHEET 1 OF 1

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 7032-6729-060