

ROHS COMPLIANT

PRODUCT DATA DRAWING

	REVISION HISTORY		
REV	DESCRIPTION	DATE	APPROVED
-	DCN 38041	02/11	STW
Α	REV. DCN 38604	10/13/11	STW
В	REV. DCN 39055	05/07/12	STW

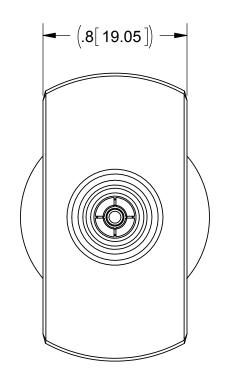

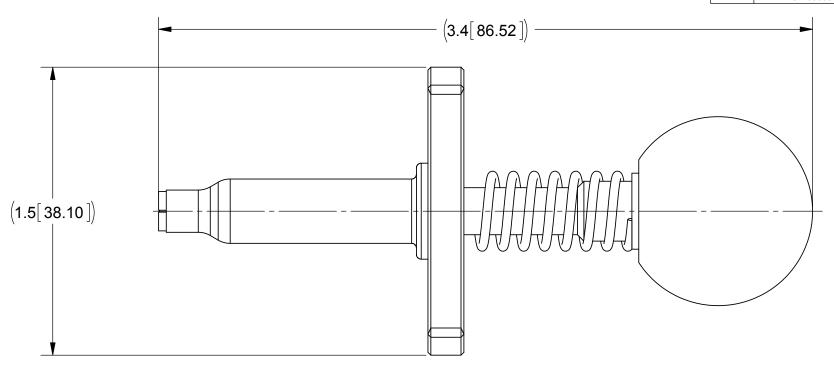

MATERIAL:

SHAFT, TIP

STAINLESS STEEL PER ASTM A564, ALLOY UNS S17400, TYPE 630, COND. A & TUBÉ:

BRASS PER ASTM B16, ALLOY UNS No. C36000 FINGER GRIP:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 COLLET:

COMPRESSION SPRING: STAINLESS STEEL PER ASTM A313, TYPE 302

KNOB: **PLASTIC**

FINISH:

COLLET: NICKEL PER SAE AMS 2404, CLASS 1

FINGER GRIP: NICKEL PER AMS-QQ-N-290

SHAFT, TIP

& TUBÉ: PASSIVATED PER AMS-2700

COMPRESS TO OPEN COLLET, RELEASE TO CLOSE COLLET, PULL TO REMOVE BULLET

	MATERIAL: SEE NOTES		
	FINISH: SEE NOTES		
	SURFACE AREA: N/A		
	PROPRIETARY		
-	THE INFORMATION CONTAINED IN THIS DRAWI IS THE SOLE PROPERTY OF SV MICROWAVE, IF ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		

3	DIMENSIONS ARE IN INCHES TOLERANCE
	FRACTIONAL: ±1/64 ANGULAR: X° ± X°X' -
5	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
	INTERPRET DIMENSIONS AND TOLERAND PER ASME Y14.5M - 1994
DRAWING AVE. INC.	THIRD ANGLE PROJECTIO
VHOLE	

DIMENSIONS ARE IN INCHES TOLERANCES:		
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'		
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005		
INTERPRET DIMENSIONS AND TOLERANCES		

* ±1°0' (*X' ±15' RANCES	1) ALL DIMENSIONS ARE IN 2) ALL DIMENSIONS ARE A 3) BREAK CORNERS & EDG 4) CHAM. 1ST & LAST THRI 5) SURFACE ROUGHNESS 6) DIA: S ON COMMON CEN WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	FTER PLATING. SES .005 R. MAX. EADS.
TION	DRAWN:	FFD 02/28

UNLESS OTHERWISE SPECIFIED

O ANGLE PROJECTION	DRAWN:	FED 02/28/11
	CHECKED:	STW 02/28/11
	APPROVED:	STW 02/28/11

SV Microwave, I	nc.
0 1 111101 0 11 0 1 0 , 1	

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMP BULLET REMOVAL TOOL

SIZE B	CAGE CODE 95077	DWG. NO. 500-12	2-000
SCALE: 2:1			CUEET 4

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 500-12-000