

PRODUCT DATA DRAWING

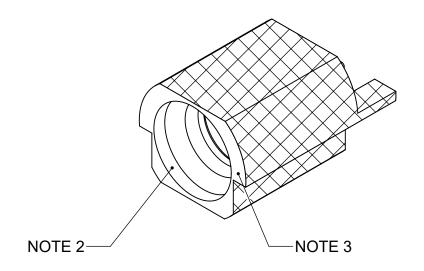

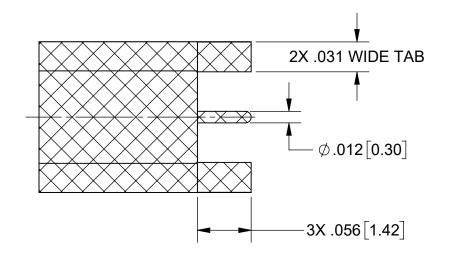

NOTES:

- 1. Sn63 SOLDER REQUIRED IN HATCHED AREAS AS SHOWN.
- 2. NO SOLDER ALLOWED IN INTERFACE.
- 3. SOLDER SPLASH ALLOWABLE ON THIS FACE.
- 4. CONNECTOR MUST BE FLUSH TO BOARD FOR OPTIMAL RF PERFORMANCE.
- 5. PART TO BE SHIPPED WITH TAPE AND REEL.
- 6. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

MATERIAL:

- BODY: STAINLESS STEEL PER AMS-5640 OR ASTM A582 ALLOY S30300, TYPE 303, CONDITION A.
- CONTACT: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
- INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B


FINISH:


BODY & CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76 (.000030" MIN), OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .000050" MIN

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 40.0 GHz
INSUL. RES.:	5000 MEGOHMS, MIN.


NOTE 1		SV PART NUMBER 3211-60307		INTERFACE SMOOTH BORE				
MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'	UNLESS OTHERWISE SPECIFIED					
FINISH:	SEE NOTES	DECIMAL: X ±.030 .XX ±.010	1) ALL DIMENSIONS ARE IN INCHE 2) ALL DIMENSIONS ARE AFTER P 3) BREAK CORNERS & EDGES .00 4) CHAM 1ST & LAST THERADS	5 R. MAX.	www.svmicrowave.com			
SURFACE AREA: N/A		.XXX ±.005	 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63 a MIL 6) DIA.'S ON COMMON CENTERS 1 WITHIN .005 T.I.R. 7) REMOVE ALL BURRS 	-STD-10. TO BE CONCENTRIC	SMPN	M MALE STRAIGHT		
	PROPRIETARY	PER ASME Y14.5M - 1994	DRAWN:	DTL 04/03/20	PC	B EDGE MOUNT		
IS THE SOLE F ANY REPROD	ATION CONTAINED IN THIS DRAWING PROPERTY OF SV MICROWAVE, INC. UCTION IN PART OR AS A WHOLE E WRITTEN PERMISSION OF		CHECKED:	STW 04/03/20	SIZE DWG. NO.	3211-60307-60308		
	VE, INC IS PROHIBITED.	W U	APPROVED:	STW 04/03/20	SCALE: 16:1	SHEET 1 OF 2		

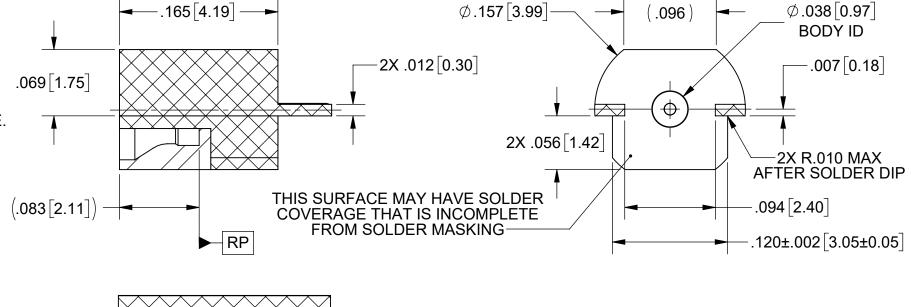

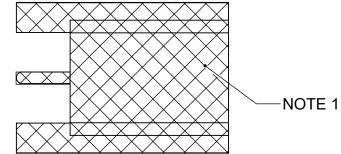

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	NRN 44733	04/20	STW	
Α	DCN 49924	06/20	STW	

RECOMMENDED PCB MECHANICAL FOOTPRINT

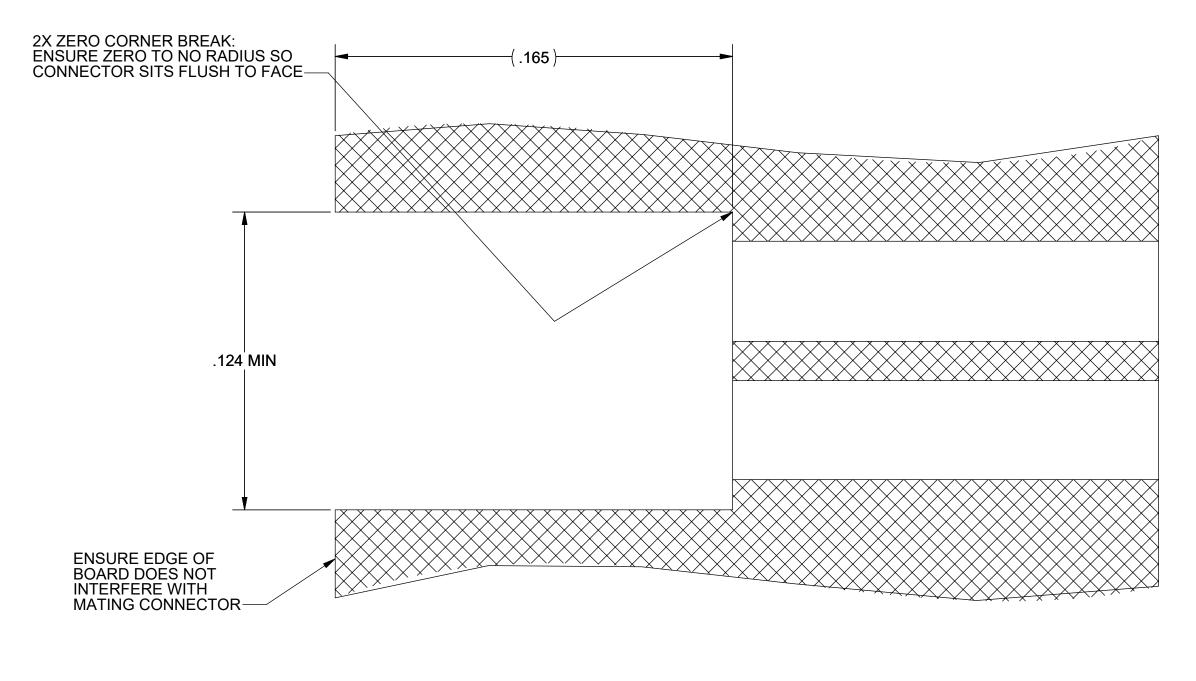

FINISH: SEE	E NOTES E NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: X ±.030 .XX ±.010 .XX ±.005	1) ALL DIMENSIONS ARE IN IN 2) ALL DIMENSIONS ARE AFT 3) BREAK CORNERS & EDGES 4) CHAM. 1ST & LAST THREAT	S .005 R. MAX. DS.		S	Amphe MICROWAY www.svmicrowave.com	
	/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	 SURFACE ROUGHNESS 63.MIL-STD-10. DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN T.I.R. REMOVE ALL BURRS 		SMPM MALE STRAIGHT PCB EDGE MOUNT			
		THIRD ANGLE PROJECTION	DRAWN:	DTL 04/03/20				
ANY REPRODUCTION IN WITHOUT THE WRITTEN			CHECKED:	STW 04/03/20	B	. NU.	3211-60307	7-60308
SV MICROWAVE, INC IS F			APPROVED:	STW 04/03/20	SCALE:	16:1		SHEET 2 OF 2

REVISION HISTORY					
DESCRIPTION	DATE	APPROVED			
NRN 44733	04/20	STW			
	DESCRIPTION	DESCRIPTION DATE			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 3211-60308