



PRODUCT DATA DRAWING



Ø.050 [1.27]

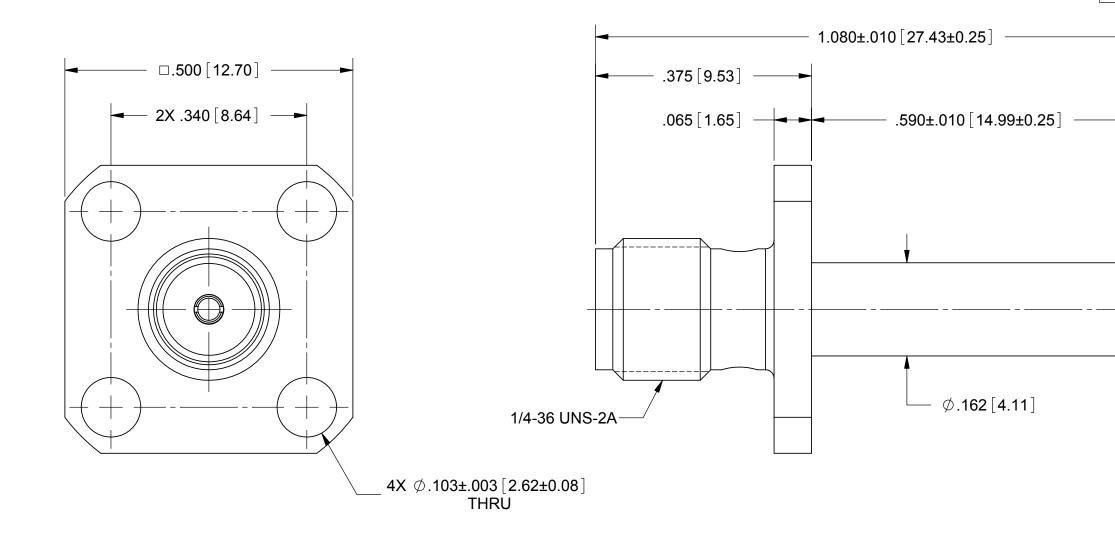

MATERIAL:

STAINLESS STEEL PER AMS-5640, BODY:

ALLOY UNS S30300, TYPE 1

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY: PASSIVATED PER AMS 2700

GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL CONTACT:

PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

MATERIAL:	SEE NOTES	
FINISH:	SEE NOTES	
SURFACE AREA: N/A		
PROPRIETARY		
IS THE SOLE F ANY REPRODI WITHOUT THE	TION CONTAINED IN THIS DRAWIN PROPERTY OF SV MICROWAVE, IN UCTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF VE, INC IS PROHIBITED.	

DIMENSIONS ARE IN INCHES TOLERANCES:					
FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$ $X^{\circ}X'$ +15'					
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005					
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994					
THIRD ANGLE PROJECTION					

	DRAWN:	BNK 10/2
'0' 5' S	2) ALL DIMENSIONS ARE A 3) BREAK CORNERS & ED 4) CHAM. 1ST & LAST THE 5) SURFACE ROUGHNESS	IGES .005 R. MAX. READS.

4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL. STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		
DRAWN:	BNK 10/21/15	L
CHECKED:	DAL 10/21/15	
APPROVED:	DGG 09/13/76	Г

UNLESS OTHERWISE SPECIFIED

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMA JACK, 4 HOLE FLANGE MOUNT PANEL RECEPTACLE

	SIZE B	95077	DWG. NO.	SF2950-	6061
Ī	SCALE: 6:1				SHEET 1 O

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SF2950-6061