

PRODUCT DATA DRAWING

CAD  
GENERATED  
DRAWING

DCN  
CONTROLLED  
DOCUMENT

DWG. NO.  
8017-6002

MATERIAL :

BODY,  
BUSHING &  
PRESS SLEEVE: STAINLESS STEEL PER AMS-5640  
ALLOY UNS S30300, TYPE I

CONTACTS,  
E-RING,  
SPRING CLIP &  
SHIM SPRING: BERYLLIUM COPPER PER ASTM B196,  
ALLOY UNS C17300, TD04

BODY: BRASS PER ASTM B16,  
ALLOY UNS C36000, H02

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

INSULATOR: KEL-F

COIL SPRING: CARBON STEEL MUSIC WIRE

RESISTOR ELEMENT: ALUMINUM NITRIDE SUBSTRATE WITH  
TANTALUM NITRIDE RESISTOR; GOLD  
PLATED TERMINATIONS

FINISH :


BODIES,  
CONTACTS,  
INSERT,  
SHIM SPRING &  
SPRING CLIP: GOLD PER ASTM B488, TYPE I,  
CODE C, CLASS 0; OVER NICKEL  
PER AMS-QQ-N-290, CLASS1, .000050" MIN.

CONTACT: GOLD PER ASTM B488, TYPE II,  
CODE C, CLASS 1.27; OVER NICKEL  
PER AMS-QQ-N-290, CLASS 1, .000050" MIN.

E-RING: NICKEL PER AMS-QQ-N-290,  
CODE G, CLASS 1

SPRING: ZINC

NOTES:  
1. POWER INPUT DERATED LINEARLY FROM 25°C TO .5 WATTS  
AT 125°C.

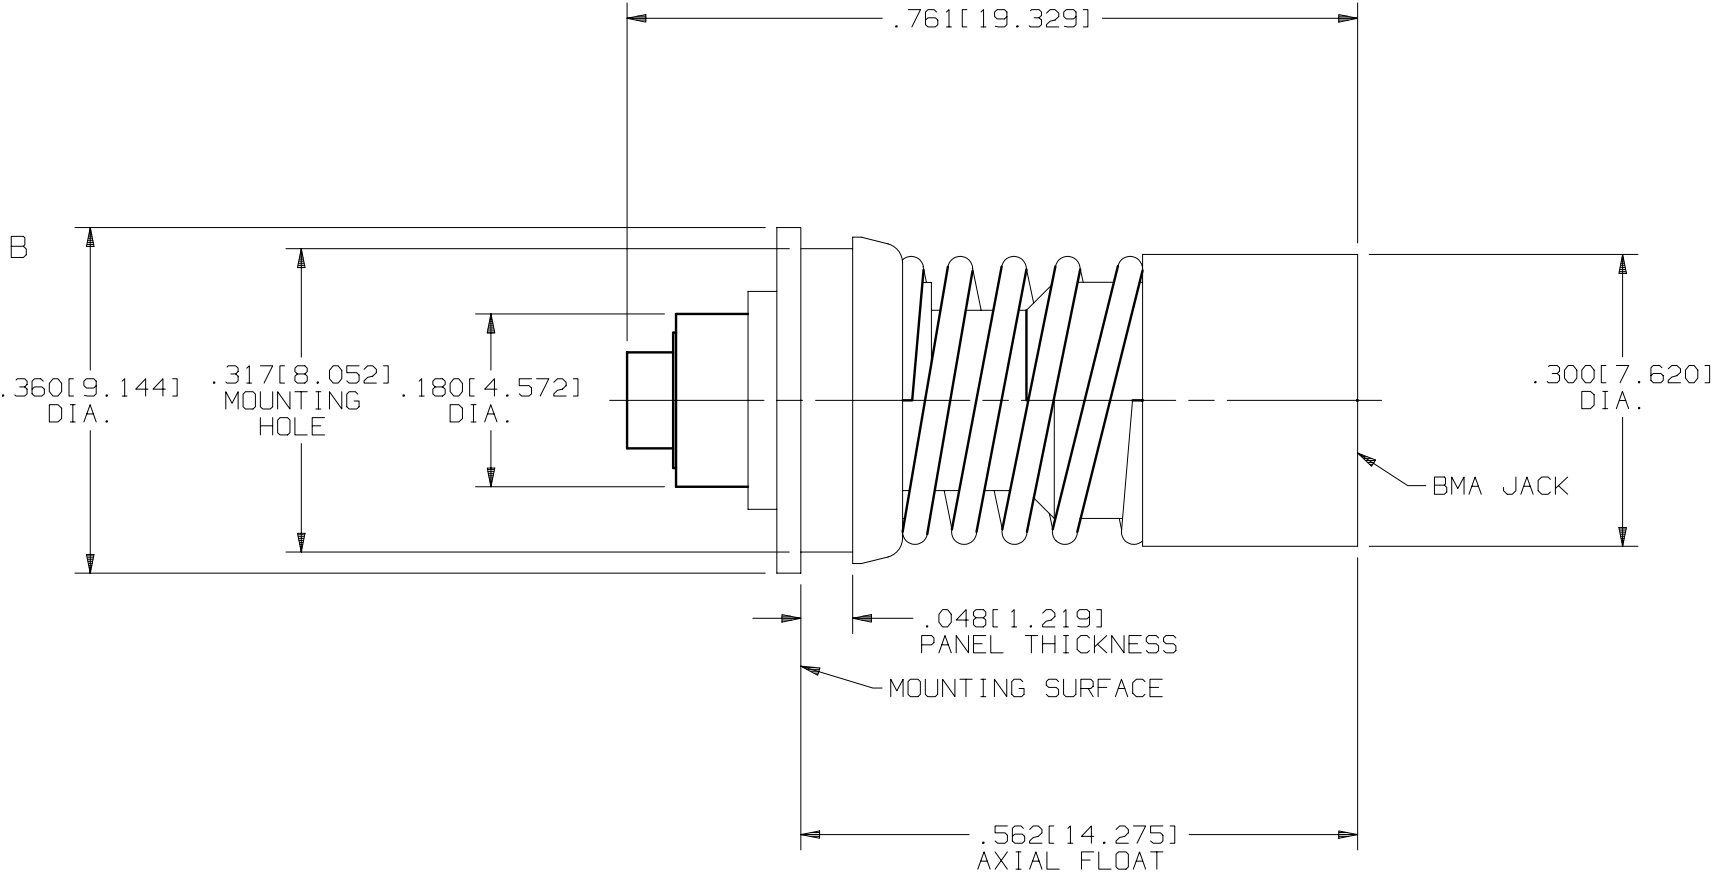

PERFORMANCE :

IMPEDANCE: 50 OHMS  
FREQ. RANGE: DC TO 12.0 GHz  
VSWR: 1.20:1 DC TO 12 GHz  
AVG. POWER: 1 WATT (NOTE 1)

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED: 1)ALL DIMENSIONS ARE AFTER PLATING. 2)BREAK CORNERS & EDGES .005 R.MAX. 3)CHAM. 1s1 & LAST THDS. 4)SURFACE ROUGHNESS 63 / MIL-STD-10. 5)DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6)REMOVE ALL BURRS.	DIMENSIONS ARE IN INCHES TOLERANCES:			SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409
-	REL.DCN 29339	01/03	STW		DECIMALS	FRACTIONAL	ANGULAR	
A	REV.DCN 32953	04/05	CCC		.X ±.030		X° ±1°0'	
B	REV.DCN 33116	06/05	CCC		.XX ±.015	±1/64	X°X' ±15'	
					.XXX ±.005			
				DRAWN: MEB 01/06/03	MATERIAL: SEE ABOVE		□" AREA:	BMA JACK FLOATING MOUNT TERMINATION
				CHECKED: STW 01/06/03	FINISH: SEE ABOVE		N/A	
				APPROVED: STW 01/06/03	SIZE	CAGE NO.	SCALE	DWG. NO.
					B	95077	5X	8017-6002

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[8017-6002](#)