
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	NRN 45606	02/21	BNK	

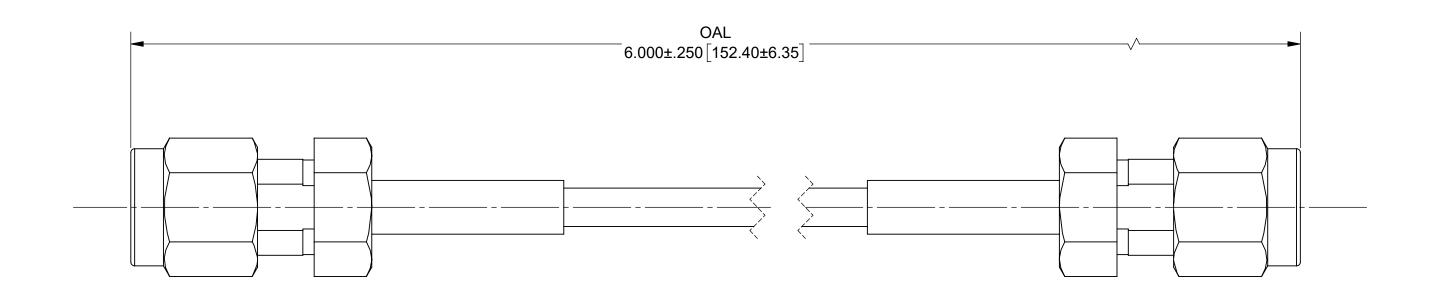

MATERIAL:

CONNECTORS: SMA MALE IP68 (2911-60994)

CABLE: T-FLEX 405 (200-70-139)

STRAIN RELIEF: M23053/5

PERFORMANCE:

IMPEDANCE:

50 OHMS DC TO 18.0 GHz. FREQ. RANGE:

SEE NOTES				
SEE NOTES				
SURFACE AREA: N/A				
PROPRIETARY				
TION CONTAINED IN THIS DRAWING ROPERTY OF SV MICROWAVE, INC. ICTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF IE, INC IS PROHIBITED.				

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	7) REM
THIRD ANGLE PROJECTION	DR
	CH

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 0.05 F. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHINES 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.LR.
7) DEMOVE ALL BLIDDS

SIONS AND TOLERANCES - 1994	SUNFACE ROUGHNESS 63-MIL-SID-10. DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		
E PROJECTION	DRAWN:	JPM 02/11/21	_
	CHECKED:	BNK 02/11/21	
	APPROVED:	BNK 02/11/21	



SMA STR. IP68 M TO SMA STR. IP68 M TFLEX 405 CABLE ASSEMBLY

7029-3573 SCALE: 4:1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7029-3573