
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 42974	04/19	STW

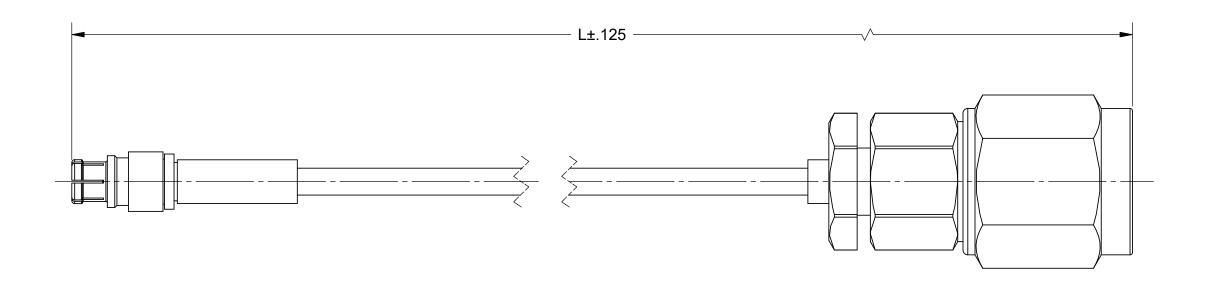

MATERIAL:

SMPM FEMALE CONNECTOR: 3221-40007

2.4MM MALE CONNECTOR: SF1611-60001

CABLE: STANDARD FLEXTRA CABLE

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 40 GHz.

TABLE 1		
SV P/N	L (IN)	
7016-0068	6.000	
7016-0069	12.000	

SCALE: 5:1

ATERIAL: SEE NOTES			
EE NOTES			
SURFACE AREA: N/A			
PROPRIETARY			
CONTAINED IN THIS DRAWING ERTY OF SV MICROWAVE, INC. IN IN PART OR AS A WHOLE TEN PERMISSION OF			
3			

	DIMENSIONS ARE IN INCHES TOLERANCES:					
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'					
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005					
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994					
G	THIRD ANGLE PROJECTION					

030 010 005 SIONS AND TOLERANCES - 1994	3) BREAK CORNERS & EDCES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
LE PROJECTION	DRAWN:	SRM 04/10/19
	CHECKED:	STW 04/10/19

APPROVED:

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING

STW 04/10/19

Amphenol MICROWAVE 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409					
TITLE:					
SMPM FEMALE TO 2.4MM MALE					
Ø.047 FLEX CABLE ASSEMBLY					
SIZE CAGE CODE DWG. NO. 7016-0068-0069					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

7016-0068