



PDM: Rev:AK STATUS: Released Printed: Feb 20, 2010

		11	2 3	41 51 6	
	PIN PLATING CODES:				
	XXXXXX—1YY 30u"/0.76u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni		R 50u"/1.27u MIN Ni		
\bigcirc		.27u MIN Au OVER 50u"/1.27u	· · · · · · · · · · · · · · · · · · ·		
	VVVV_4VV	·			
	XXXXX-4YYHLF	2.54u MIN Sn OVER 50u"/1.27 u	I MIN NI (SEE NOIE 13)	(3.) PIN MATERIAL: PHOS-BRONZE.	
	XXXXX-5YY 15u"/0.	.38u MIN (SEE NOTE 12) OVER	50u"/1.27u MIN Ni	(4.) MEASURED WITH PART IN RESTRAINED CONDITION.	
	XXXXX-6YY 30u"/0	.76u MIN (SEE NOTE 12) OVER	50u"/1.27u MIN Ni	TO ME BOOKES WITH FAMILY MARES SOMETHOR.	
	XXXXX-7YY 30u"/0.	.76u MIN Au OVER 50u"/1.27u	u MIN Ni	5. TWO SIDES OF PIN TIPS NOT PLATED. TYPICAL BOTH ENDS.	
	XXXXX-8YY 15u"/0.	.38u MIN Au OVER 50u"/1.27u	ı MIN Ni	(6.) 2LBS/0.9KG MIN PIN RETENTION IN EITHER DIRECTION.	
<u>A</u>	XXXXX-9YY 15u"/0.	.38u MIN GXT OVER 50u"/1.27u	a MIN Ni	A	
	XXXXX-0YY 30u"/0.76u MIN GXT OVER 50u"/1.27u MIN Ni			(7.)±.010/0.25 TOL APPLIES TO ALL 'G' TAILS EXCEPT INDICATED PARTS ON TABLE WHERE +.010/0.25000/0.00 APPLIES.	
	NOTES			8. DETAIL N DIMENSIONS APPLY TO 2 POSITION PARTS ONLY	
	(1.) PART NUMBER OPTIONS:			9.) SECTION R-R DIMENSIONS ONLY APPLY TO RETENTION. PIN POSITIONS FOR 3 POSITION PARTS AND LARGER. RETENTION PIN	
	PIN PLATING CODES (SEE ABOVE)			POSITIONS LOCATED AT MANUFACTURER'S OPTION.	
	HIGH TEMP. MATERIAL: FOR HIGH—TEMPERATURE APPLICATIONS, SPECIFY AN "H" AT			10. 5LB/2.3KG MAX INSERTION FORCE AND .25LB/.1KG MIN RETENTION FORCE PER RETENTIVE PIN USING .062/1.57 THICK CIRCUIT BOARDS AND	
	THE END OF THE PART NUMBER, AND PCT WILL BE SUPPLIED. NUMBER OF POSITION:		D PCT WILL BE SUPPLIED.	RECOMMENDED HOLE PATTERN.	
B	ANY NUMBER OF POSITIONS FROM 2 THRU 36.			(11) THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER	
	PACKAGING: PACKAGED	IN POLY BAGS.		COUNTRY REGULATION AS DESCRIBED IN GS-22-008.	
=	EIGHT DIGIT PART NUMBERS FOLLOWED BY A "T" ARE PACKAGED IN TUBES. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY. LEAD FREE: ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION, NOT AVAILABLE FOR -5YY, -5YYH, -6YY & -6YYH. (2. BODY MATERIAL: MANUFACTURER'S OPTION OF NYLON OR PCT, GLASS FIBER			(12) PLATING OPTIONS:	
				MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.	
Filtrametic				(13)"THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."	
\bigcirc					
	REINFORCED, FL	AME RETARDENT PER UL-			
	COLOR: BLACK.	LCP, COLOR BLACK			
-	FLAME RETARDENT PER UL-94V-0.				
<u>C</u>	PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS. PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.				
B					
				10 I loudet Gell	
				mat'1. code Surface folerance projection product family NOTES 2 & 3 ISD 1302 ISD 1406 A BERGSTIK	
ŧ				ltr ecn no dr date toterances unless otherwise specified title	
Capyrig				angles linear MXH.01/XH.0.3 INCH/MM BERGSTIK®II HEADER	
_				0°±2'	
\bigcap				engr T. HANNA 4/19/93 FC 69 1 9 0	
\bigcirc				chr T. BREWBAKER 4/19/93 by 1909 Product Customer Drawing	
П				sheet revision D	
ט	form: A3	1	2	3 4 5 6	
		• •	= -		

PDM: Rev:AK STATUS:Released Printed: Feb 20, 2010

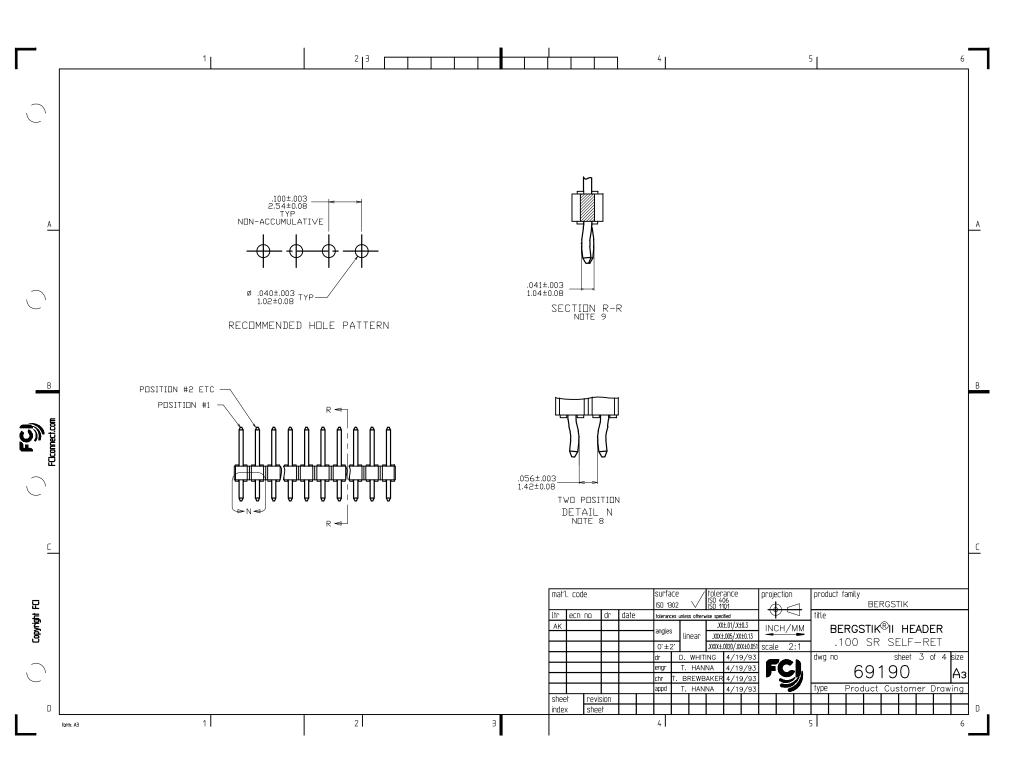

PDM: Rev:AK STATUS:Released Printed: Feb 20, 2010

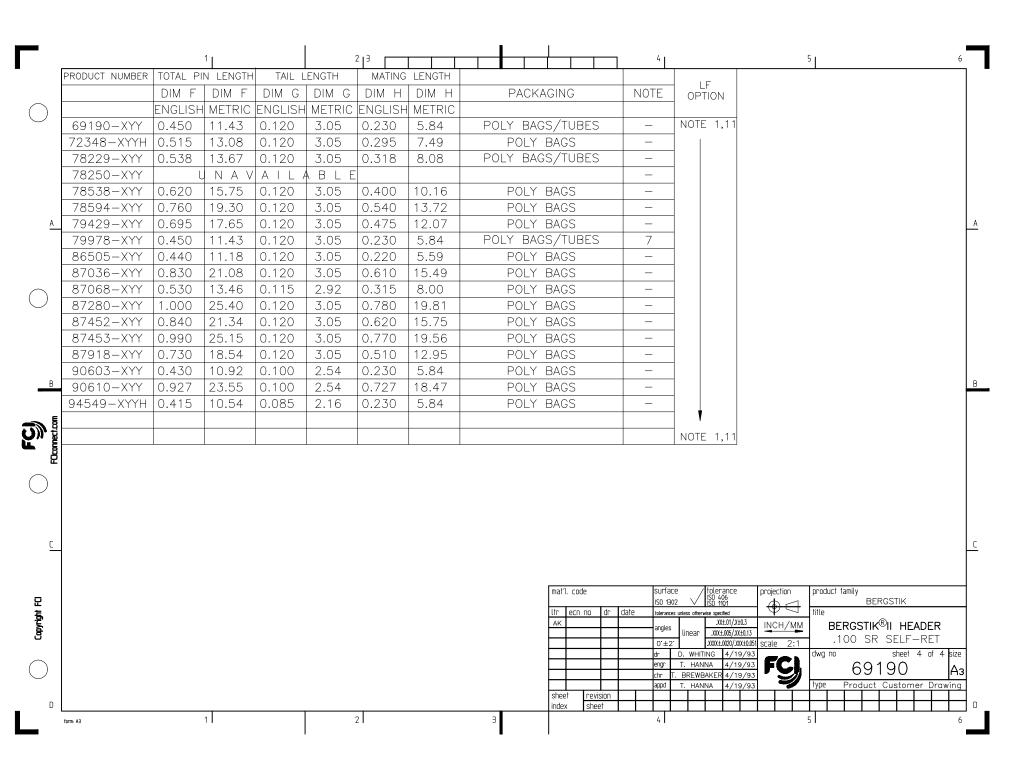

PDM: Rev:AK STATUS:Released Printed: Feb 20, 2010

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol: 87452-416HLF 87452-410HLF