

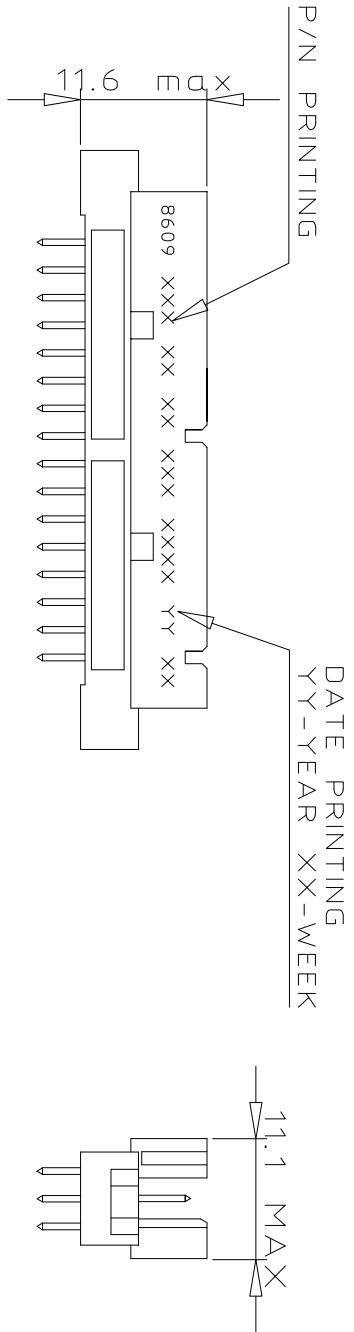


DIMENSIONS

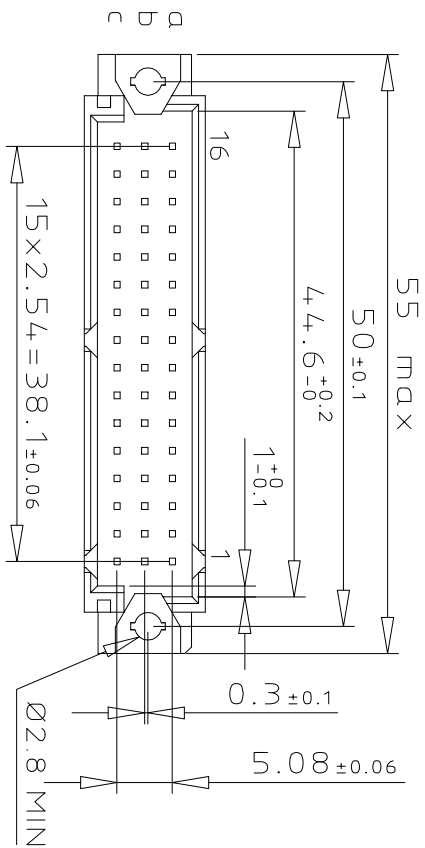


TERMINATION

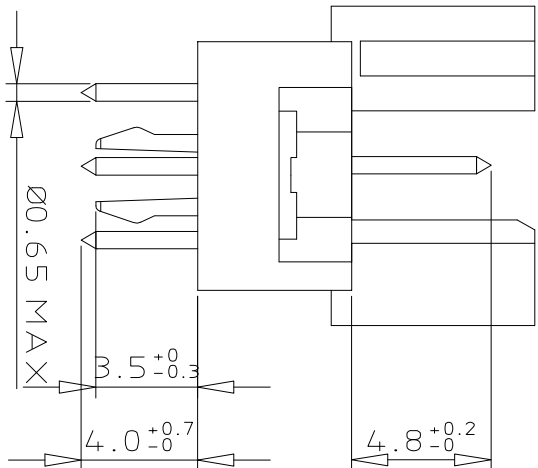

ORDERING INFORMATION

SERIES	8609	3	4	8	7	6	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS											
ROW a	b	c									
ROW a - c											
NO. OF CONTACTS											
TYPE OF INSULATOR											
3 ROW MALE INSULATOR											
METHOD OF MOUNTING											
REVERSE MOUNTING - STYLE R/2											
TERMINATION											
STRAIGHT SPILL											
OPTIONS											
NO OPTION											
WITH HARPOONS											
PERFORMANCE CLASS											
DIN 41612 CLASS 3											
DIN 41612 CLASS 2											
DIN 41612 CLASS 1											
AS PER MIL C 55302 / JSS 50808											
PITCH PER ROW											
2.54 mm											
LEAD FREE VERSION											

PCB LAYOUT

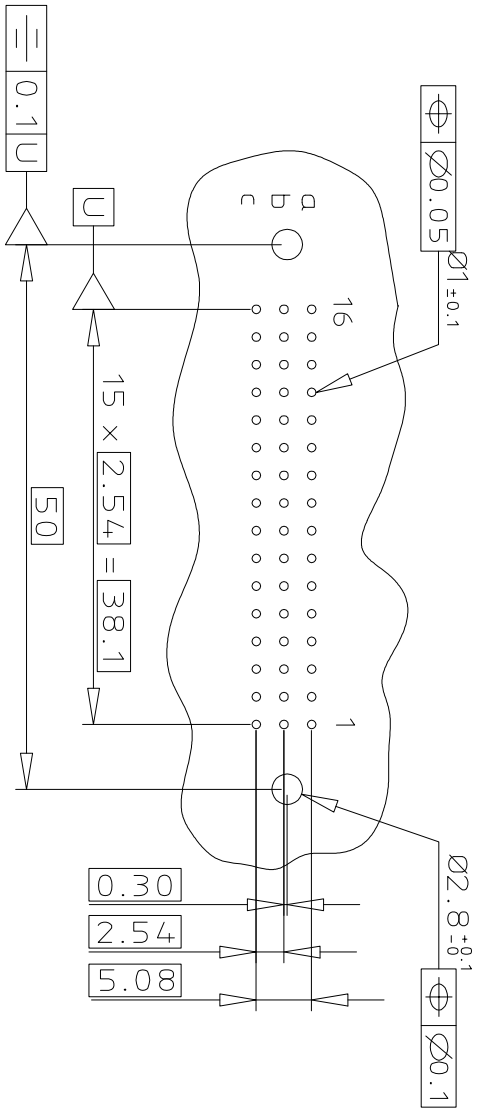

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code				surface		tolerance		projection		product family			
SEE DWG C-8609-0000A				ISO 1302		ISO 406 ISO 1101				8609			
ltr	ecn	no	dr	date		tolerances unless otherwise specified		mm		title			
A	104-0063	MINI	2004-09-17	angles		linear		0.X		DIN REVERSE HEADER			
B	105-0042	MINI	2005-05-19	0°±2°		0.XXX		±0.1		DIN 41612 STYLE R/2			
C	106-0061	MINI	2006-05-31	dr		MINI K V		2004-09-17		dwg no			
D	108-0146	KR	2008-10-21	engr		RAKHEE G		2004-09-17		sheet 1 of 1			
				chr		KESAVAN R		2008-10-21		size			
				oppd		KESAVAN R		2008-10-21		A3			
sheet index	revision	sheet	1							type			
										Product Customer Drawing			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093487614H55ELF](#)