




REVISIONS				
REV	ECN	DESCRIPTION	DATE	APPROVED
R		5.840 TOLERANCE CORRECTED	MAR 13/08	JLJ
S		CAGE COVER MATERIAL CHANGE	JUN 02/08	JLJ
T		1° REF. ADDED	AUG 23/08	JLJ




KEY #1




KEY #2




KEY #3




KEY #5




KEY #6




KEY #7




KEY #2, 4





KEY #4, 6

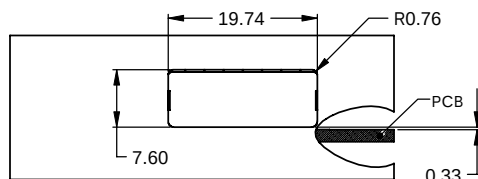


RECOMMENDED PANEL CUT-OUT

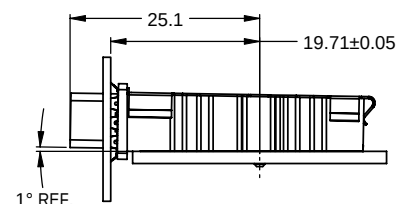

RECOMMENDED FACE PLATE TO LOCATING POST DISTANCE

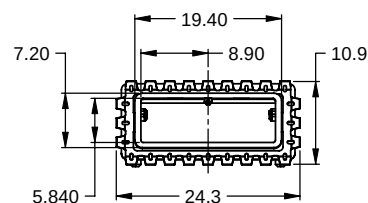


KEY #4

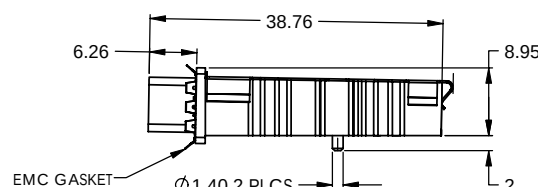

EMC GASKET



8.0
M2 X 0,4
MOUNTING SCREW
QTY 4 SUPPLIED

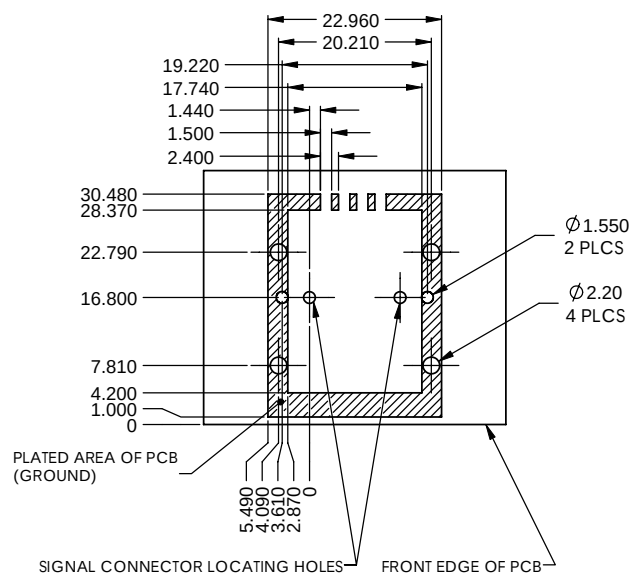


PLATED AREA OF PCB
(GROUND)

SIGNAL CONNECTOR LOCATING HOLES

FRONT EDGE OF PCB

RECOMMENDED PCB LAYOUT

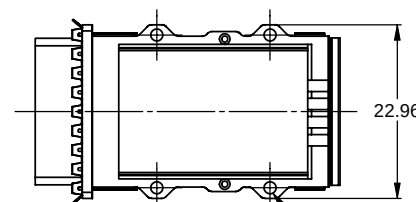

VIEW F

M2 X 0,4
4 PLCS

Key Option	Part Number	Description
0	FS1-S01-10E1	No Key
1	FS1-S01-11E1	SATA 'X' Cable
2	FS1-S01-12E1	
3	FS1-S01-13E1	
4	FS1-S01-14E1	SAS Universal Port
5	FS1-S01-15E1	
6	FS1-S01-16E1	
7	FS1-S01-17E1	SATA 'M' Cable
2, 4	FS1-S01-124E1	SAS Out Port
4, 6	FS1-S01-146E1	SAS In Port



NOTES:

1) MATERIAL:

MAIN CAGE: ZINC DIECAST SHELL WITH 150 MICROINCHES OF NICKEL PLATING

EMC GASKET: STAINLESS STEEL

COVER: STAINLESS STEEL

2) ROHS COMPLIANT

3) COMPLIES WITH SFF-8088 EXCEPT WHERE NOTED.

APPROVALS		DATE	Amphenol Canada Corp.	
DRAWN	YK	07/NOV/06	FILE	MINI SAS 1 DEGREE SINGLE PORT CAGE
DESIGNED	YK	06/DEC/06		
CHECKED				
QA APP'D				
ENG. REL. NO.	EAR 123XX	E APP'D	C	DWG. NO. P-FS1-S01-1XE1
CODE IDENT. NO.	03554	DWG APP'D	SCALE NTS	PROJECT SFF
				REV T
				SHEET 1 OF 1

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[FS1-S01-124E1](#) [FS1-S01-146E1](#)