

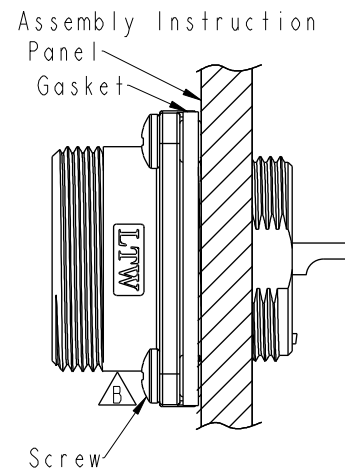
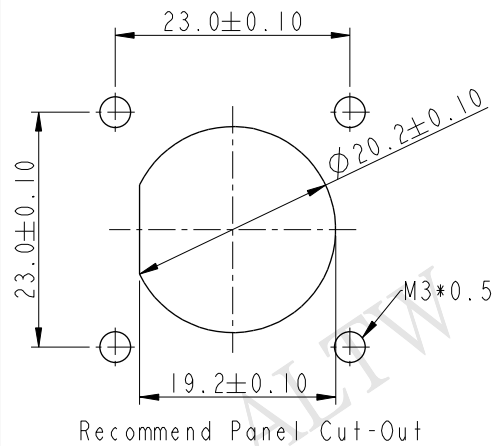



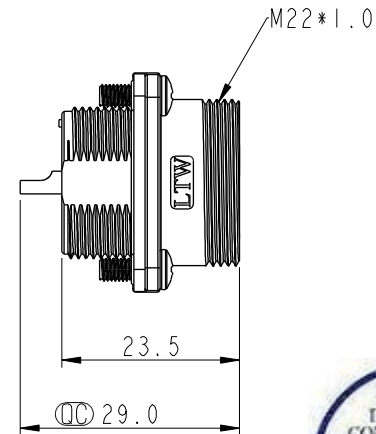




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	HC20-02PMFS-SS8001 To HC20-02PMFS-SW8001
B	LEN14A0102	2014/09/13	Feng_Li	Change Logo Direction
C	LE31650214	2016/05/03	Vicky	Update Note

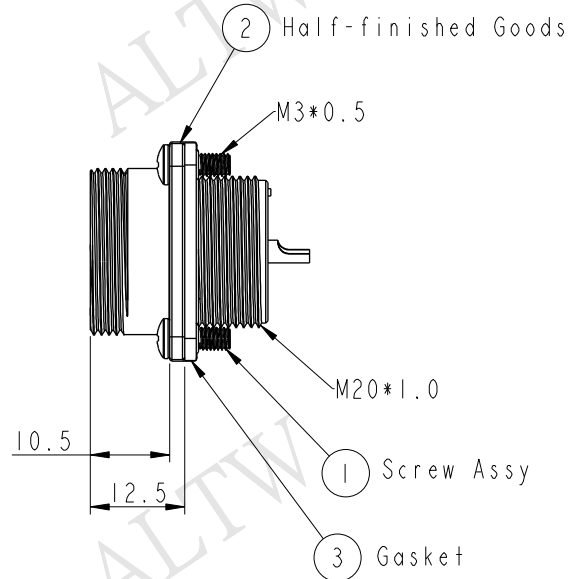

△ Note:

- * (CC) Important Dimension.
- * Waterproof Rate: IP68.
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試 24 小時
- * Shell: Zinc Alloy, Electrodeposition Coating, Black.
- * Insulation: Nylon, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Gasket: Silicone, Gray.
- * Screw: Stainless Steel.
- * Recommended Panel Thickness 9.0mm(Max.)

UNIT: mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE PANEL SCREW 2PIN M CONN F PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.3	(CC): Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO HC20-02PMFS-SW8001	DRAWN BY Vicky	DATE 2016-05-03
DWG NO HC20-02PMFS-SW8001	CHECKED BY Rita	DATE 2016-05-03
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016-05-03

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[HC20-02PMFS-SW8001](#)