
Γ.	1	2		3	4	BEV FON N	6 10	SICN		8
						A In	tial Release 2010,	/07/27 Doreen	<u>Change</u> R	EV.01 to REV.A 롱
F										UMENT
			(1) Sc	rew Body Ass'y		r(2)Connecto	r Ass'v	<u></u> 3	Sealing Nut	<u>S SUBJE</u>
	M23x1.0 –		/		/		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			<u>CT 10 C</u>
										HANGE W
E									-	
									<u>All</u>	MONCE.
H		═══┋╢╴╌┍		- M25×1.5	_			▰▯¯▯▤▤╯		Gold Plated.
D										
				-	- 73.	0 Ref				PROPER
Π										ITY OF A
			50]	3.5						mphenol
С			1 000	1 0				((LTW. DIS
								Note:		CLOSURE
	50 [O1		<u>Con</u>	<u>n.</u>		AL	* TW *	@ Important Waterproof R	Dimension. ate: P67.	HI 01
в					L T W CONFIDENTIAL	DCC. CONFID	*	Waterproof R Connector: N Male Pin: Cc	pper Alloy,	Gold Plated.
					2010.07.27		*	Screw Nut: (Gasket: Silico	Copper Alloy	, Nickel Plated.
	<u>Conn.</u> Pin Assignments				R&D DEPT.	ISSI		Recommende Cable OD: B	-	4 Awg,12 Awg.
	<u>Front View</u>	i I			\checkmark				2: Ø12~Ø17	7.5mm
	UNIT:mm 🕀 📛 Tolerance		23 CABL CON, M	E ASS'Y Type, PIN	Ampheno	I LTW	ITEM NO LJ23-06DFMC-SL DWG NO		Doreen	, Nickel Plated. -0, Gray. 4 Awg,12 Awg. 2mm ; 7.5mm №TE 2010/07/29
	IOLERANCE ±0.25 .XX ±0.1 .XXX ±0.05	scale Fr	ree	SHEET 1 OF 2	安費諾亮泰企業的		LJ23-06DFMC-SL CUSTOMER	.7001 CHECKED BY	Winnie	2010/07/29
	ANGLES ±1°	REV. A	SIZE A4	QC :Inspection Item 3	4	5	ALTW 6		Kevin 7	2010/08/06 8 FMWI0702-01-01A2

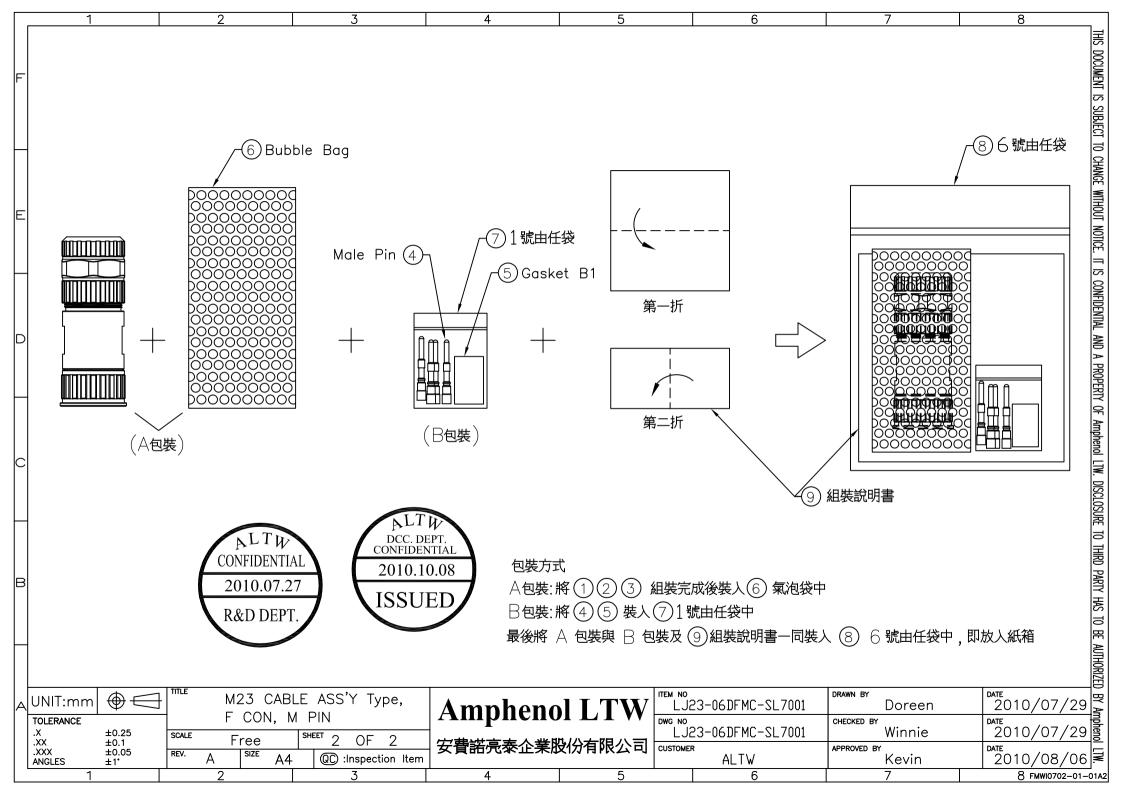

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: LJ23-06DFMC-SL7001