



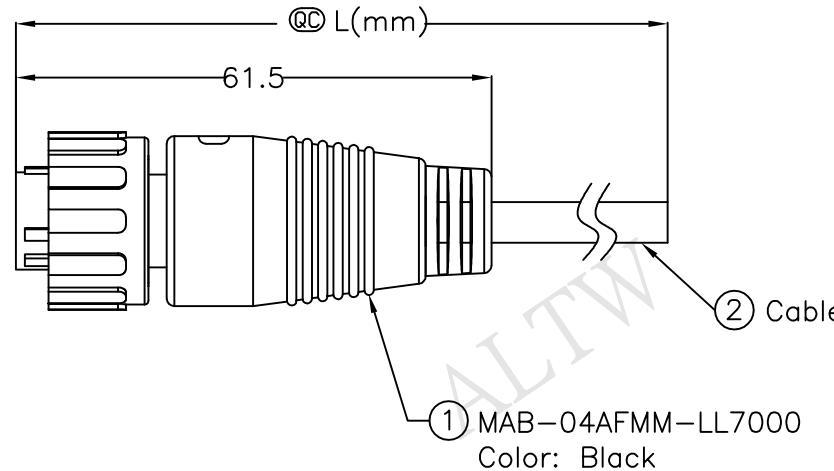



1	2	3	4	5	6	7	8
				REV. A B	ECN NO. Initial Release LEN1520120~23	DATE 2012/10/23 2015/01/30	SIGN Ruru Ruru
							DESCRIPTION MA17-04AFMM-LL7AXX To MAB-04AFMM-LL7AXX Change Logo
							THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

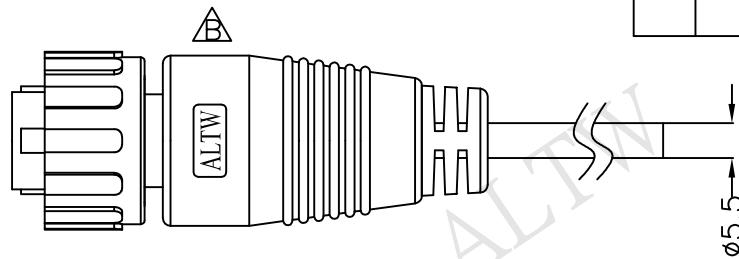

Pin Assignments
Front View 前視圖

Conn.	Wire Color
1	Brown (20AWG) 棕
2	Blue (20AWG) 藍
3	Black (20AWG) 黑
4	White (20AWG) 白

MAB-04AFMM-LL7AXX
XX:01~99Meter
01:01Meter
02:02Meters
:
99:99Meters
Cable Length(L):01~99Meters

Note:

- * @QC Important Dimensions
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Lock Nut: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 20AWG*4C+D+A
OD=5.5, Black
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm	TITLE
	CABLE 2LOCK 4P F CONN M PIN
TOLERANCE	SCALE Free SHEET 1 OF 1
±0.5 mm	REV. B SIZE A4 QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
MAB-04AFMM-LL7AXX	Ruru	2015/01/30
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2015/01/30
APPROVED BY		DATE
Win		2015/01/30

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MAB-04AFMM-LL7A10](#) [MAB-04AFMM-LL7A01](#) [MAB-04AFMM-LL7A02](#) [MAB-04AFMM-LL7A05](#) [MAB-04AMFM-LL7A10](#) [MAB-04AMFM-LL7A05](#) [MAB-04AMFM-LL7A02](#) [MAB-04AMFM-LL7A01](#)