

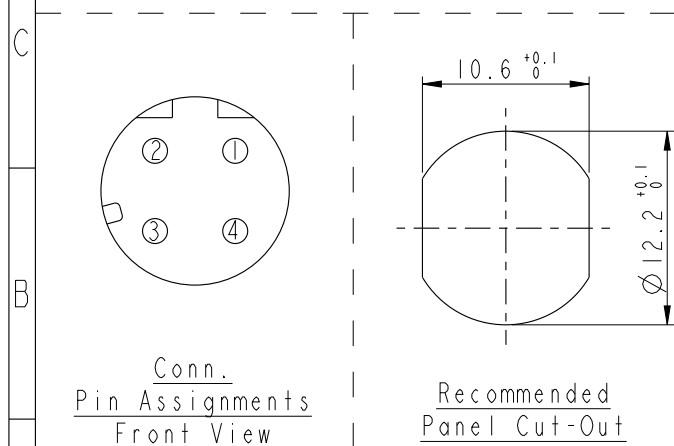
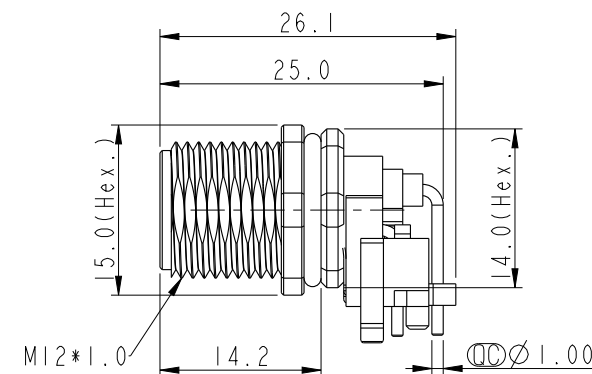

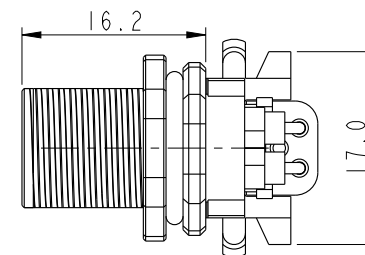



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C200275	2020-03-13	Nan_Su	△B*1

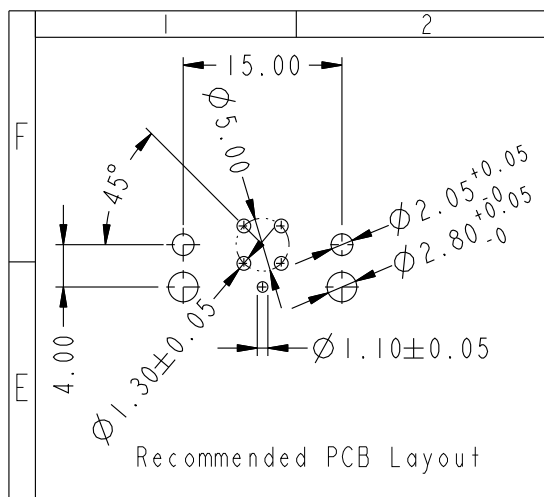

Note:

- * Important Dimension To Check
- * Waterproof Rate: IP67 (Mated Waterproof)
- * Connector: PBT+PC, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Shell: Zinc Alloy, Nickel Plated
- * Nut: Zinc Alloy, Nickel Plated
- * Grounding Pin: Copper Alloy, Tin Plated
- * O-Ring1: Silicone, Black
- * O-Ring2: Silicone, Gray
- * Pin Holder: PBT+PC, Black
- * For Panel Thickness Max. 3.0mm
- * For PCB Thickness Max. 1.6mm

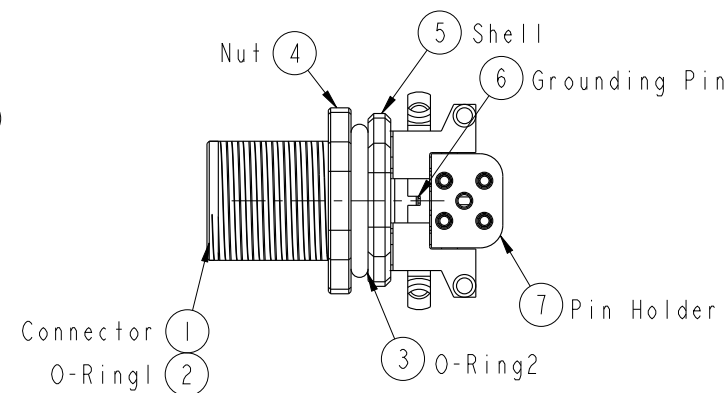

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE M12, 90° Panel, w/o Grounding Pin 4Pin M Conn M Pin			
SCALE 3:2	SIZE A4	SHEET 1	OF 1
REV. B	WC-REV. A.3	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO MSDS-04PMMR-SF7003	DRAWN BY Yulong_wang	DATE 2016-12-11
DWG NO MSDS-04PMMR-SF7003	CHECKED BY Jinhai	DATE 2016-12-11
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-12-11

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MSDS-04PMMR-SF7003](#)