

REVISIONS										
REV	ECO	DESCRIPTION	DATE	BY	APPR					
01	-	RELEASED NUMBER	2017-11-09	Nick	TOMMY					

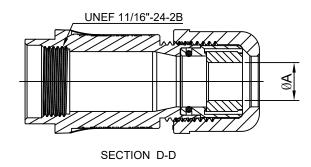

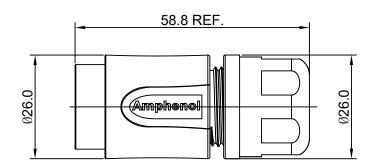

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:


O-RING: SILICONE RUBBER.


BACK SHELL: THERMOPLASTIC, UL94 V-0. CLAMP NUT: THERMOPLASTIC, UL94 V-0. CLAMP RING: THERMOPLASTIC, UL94 V-0.

CABLE SEAL: EPDM.

2. RoHS COMPLIANT.

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.



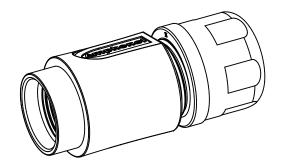

DIMENSION ØA	CABLE OD RANGE		
9.5 MM	6.0~9.0MM		
12.2 MM	8.5~12.0MM		

QUANTITY	PART NUMBER		DESCRIPTION			ITEM				
MATERIALS LIST										
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 3) Note reference =		SIGNATUR	Amphenol		nol					
		DRAWN: Nick	2017-11-09							
		CHECKED: Tod	2017-11-09	Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036			com			
		ENGINEER:								
MATERIAL SPECIFICATIONS:		APPROVAL: Tommy	2017-11-09							
		CUSTOMER:		ECO-MATE,CORD GRIP,						
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLED. ALL		RTS ,SIZE 12.						
PROCESS SPECIFICATIONS:				B c-	RTS0L-12	I.	A1			
NEXT ASS'Y:				SCALE: NONE		SHEET 1 OF	1			

ECO-MATE, COF

P, RTS,SIZE 12.

vg no: RT

CG RE

*: **A1**

Ω Ω TEM →

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: RTS0L-12CG