






REV	ECN	APP'D
P	2451	JT 08/15/95
Q	5569	JT 1/4/05
R	5748	JT 12/2/05
S	6460	JT 1/5/10

GROMMET

WHITE MARKING  
.08 HT

DATE  
CODE

HOUSING

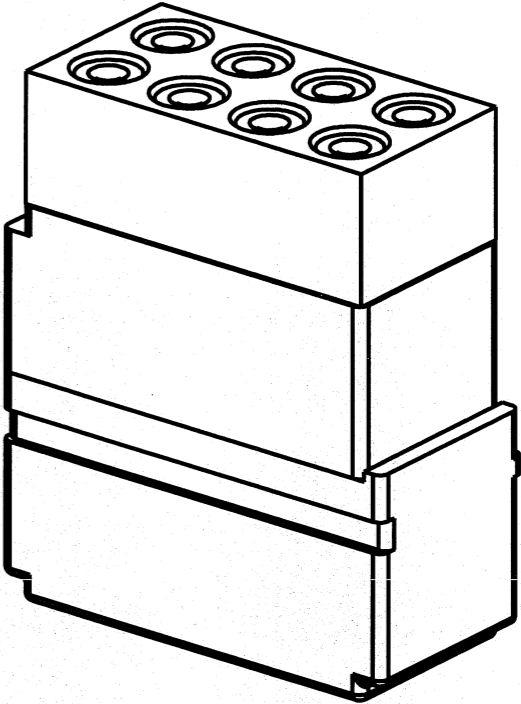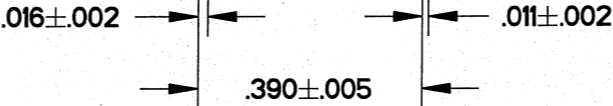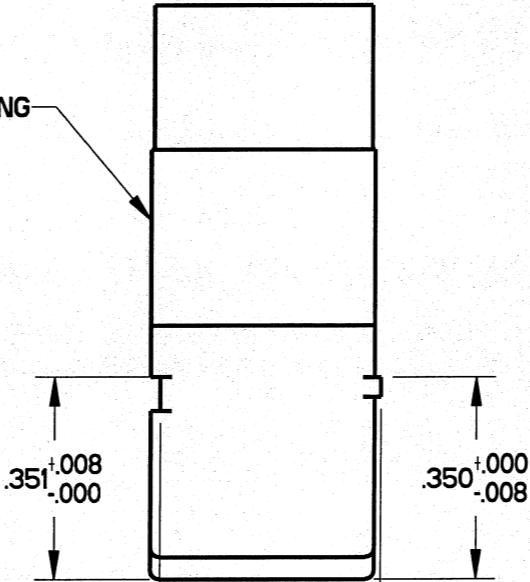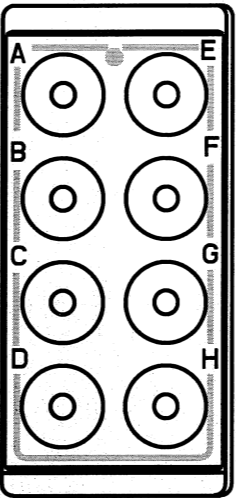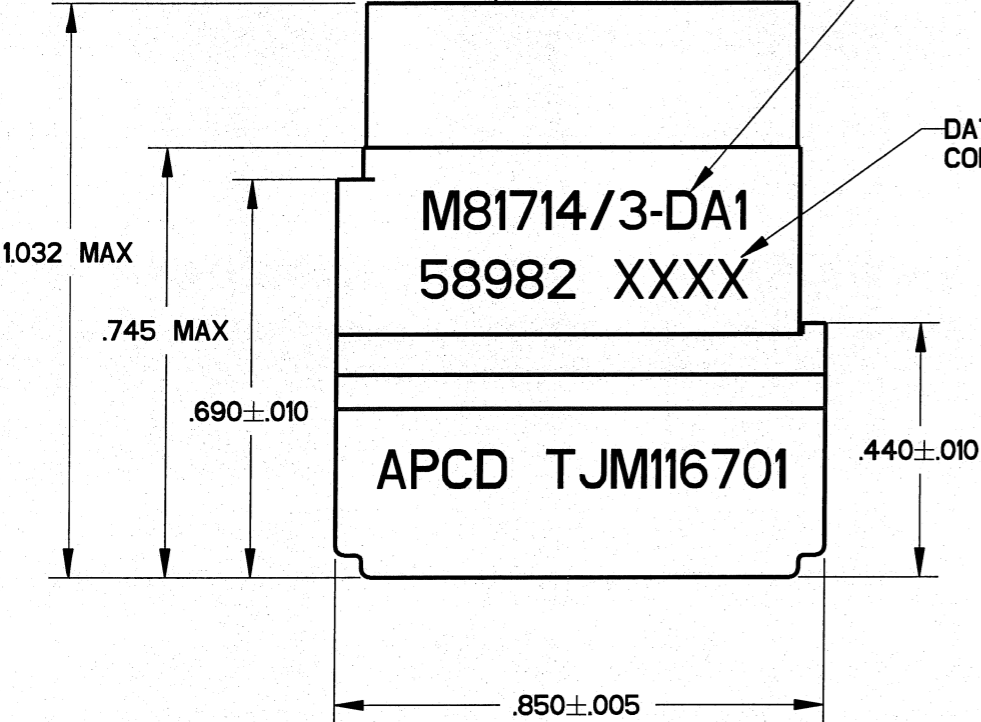

- NOTES
- PERFORMANCE:
    - A) MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF SAE AS81714. MILITARY QUALIFIED
    - B) MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR /16 OR COMMERCIAL EQUIVALENT.
    - C) DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
    - D) OPERATING TEMPERATURE: -65 °C TO 200 °C.
    - E) CURRENT RATING: 13 AMPS
  - MATERIALS:
    - A) HOUSING - POLYETHERIMIDE, COLOR: BLACK.
    - B) GROMMET - SILICONE ELASTOMER, COLOR: BLUE.
    - C) INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED.
    - D) CONTACT RETAINERS - STAINLESS STEEL.

APCD P/N	SUPPLIED		MARKING	
	PINS	PLUGS	APCD QPL NO.	MIL NO.
TJM116601	-----	-----	TJM116701	M81714/3-DA1
TJM116701	9	2		

<div>DIMENSIONS</div> <div>ANSI Y14.5M</div> <div>UNITS: INCHES</div> <div>Pro/E FILE</div>	<div>TOLERANCES</div> <div>.XX ±0.01</div> <div>.XXX ±0.008</div> <div>ANGLES ±1.0°</div>	<div>PROJECTION</div> <div></div>	<div>Amphenol Pcd</div> <div>SPECIFICATION DRAWING</div> <div>ENGR</div> <div>S. STONE</div> <div>11/30/05</div>	<div>TITLE</div> <div>TERMINAL JUNCTION</div> <div>MODULE</div> <div>SZ-16 FEEDBACK, A1 BUS</div>			
<div>ORIGINAL</div> <div></div>	<div>THIS DOCUMENT CONTAINS</div> <div>PROPRIETARY INFORMATION WHICH</div> <div>IS THE CONFIDENTIAL PROPERTY</div> <div>OF AMPHENOL PCD INC. BEVERLY, MA, USA</div>		<div>CHKD</div> <div></div> <div>1/5/2010</div> <div>APPD</div> <div></div> <div>1/5/2010</div>	<div>SIZE</div> <div>B</div> <div>CODE: 58982</div>	<div>DWG NO.</div> <div>TJM116601</div>	<div>REV</div> <div>S</div> <div>SHEET 1 OF 1</div>	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[TJM116701](#) [TJM116601](#)