



		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	FIRST RELEASE	May.16,2015	Drack	TOMMY



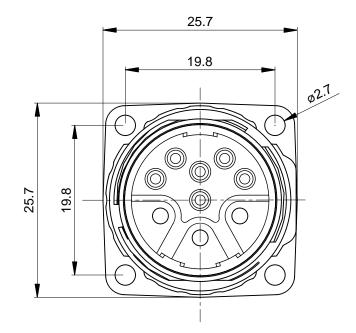

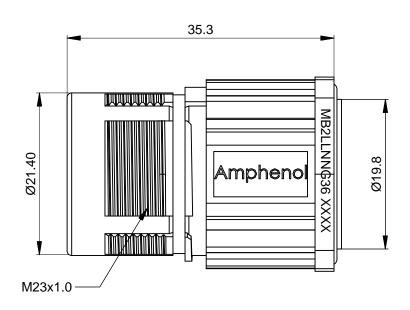

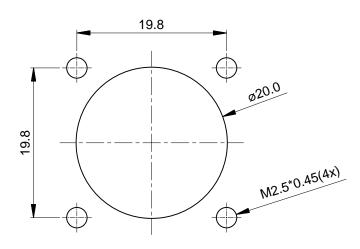

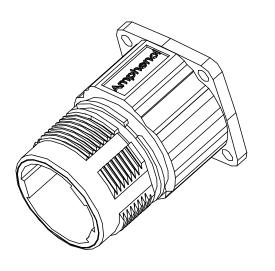

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

INSULATION INSERT: PA66, UL94 V0

SEAL: VITON

HOUSING BODY: ZINC DIE CAST, NICKEL PLATED

2. SPECIFICATIONS:

2.1 CURRENT RATING: SIGNAL: 10 AMPS

POWER: 30AMPS

2.2 VOLTAGE RATING: SIGNAL: 250V AC/DC

POWER: 630V AC/DC

2.3 OPERATING TEMPERATURE: -20°C TO +130°C

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2

MILLIAMPS CURRENT LEAKAGE @ SIGNAL: 2500VOLTS AC.

POWER: 6000 VOLTS AC.

2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)


2.6 DEGREE OF POLLUTION: 3 PER UL840

2.7 OVERVOLTAGE CATEGORY: III PER UL840

2.8 MATING CYCLE DURABILITY: >500 CYCLES

2.9 RoHS COMPLIANT

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

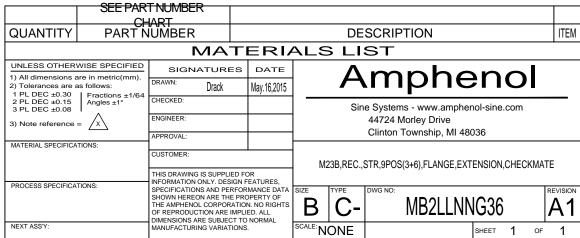

TITLE: M23B,REC.,STR,9POS(3+6),FLANGE,EXTENSION,CHECKMATE

MB2LLNNG36

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: MB2LLNNG36