


REV	ECN	DESCRIPTION	APP'D
-	7434	RELEASE	<i>1/5/15</i>

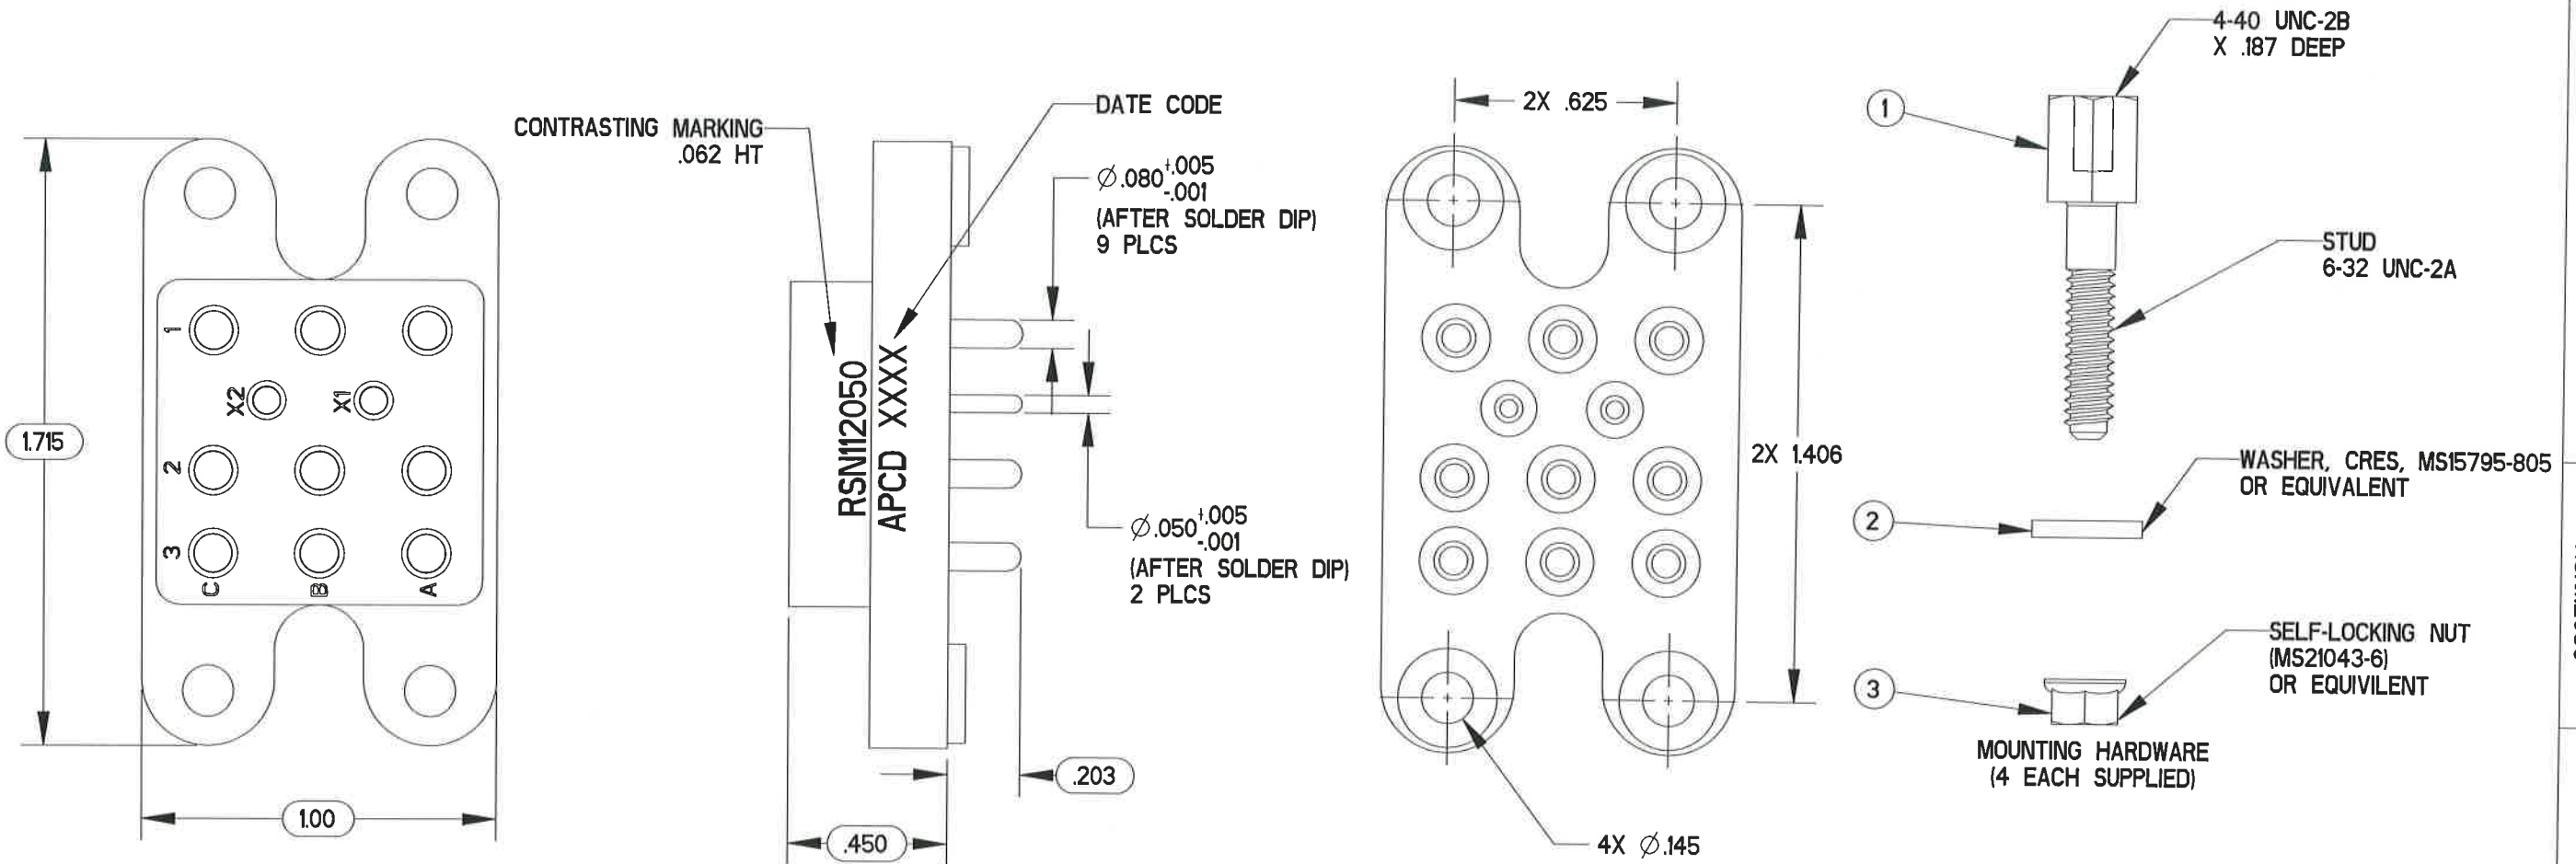

1. MATERIALS:
- A. INSULATOR - POLYETHERMIDE, COLOR: GREEN.
 - B. CONTACTS - BERYLLIUM COPPER HEAT TREATED.
PLATING: MATING AREA - 50 MICROINCH GOLD PER MIL-G-45204
OVER 30 MICROINCH NICKEL PER QQ-N-290.
SOLDER TAILS - 100 MICROINCH TIN-LEAD PER MIL-P-51728.
 - C. HARDWARE -
STUD AND NUT - CORROSION RESISTANT STEEL TYPE 300
OR A268, PASSIVATE PER QQ-P-35.
WASHER - CRES, PASSIVATE.
2. MOUNTING HARDWARE SUPPLIED IN SEPERATE BAG WITHIN UNIT PACKAGE.
3. RECOMMENDED HOLE DIAMETER FOR SOLDER PINS AS FOLLOWS:
- FOR .050 DIA PIN: .057-.067 DIA (2 PLCS).
 - FOR .080 DIA PIN: .095-.105 DIA (9 PLCS).
4. RECOMMENDED HOLE DIAMETER FOR MOUNTING STUDS: .150-.160 DIA (4 PLCS).

HARDWARE PACKAGE - P/N 450006650			
ITEM	PART NUMBER	DESCRIPTION	QTY
3	200001601	STUD	4
2	200008750	WASHER	4
1	200008800	SELF-LOCK NUT	4

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ± 0.01 .XXX ± 0.005 ANGLES $\pm 0.5^\circ$	PROJECTION 	Amphenol Pcd ENGR B. LAWSON Dec-22-14 CHKD <i>[Signature]</i> 1/5/15 APPD <i>[Signature]</i> 1/5/15	TITLE RELAY SOCKET 3 POLE
ORIGINAL NOT FOR CUSTOMER DISTRIBUTION	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA		SIZE B	DWG NO. RSN112050
			CODE: 58982	SCALE: 1.000
			SHEET 1	OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RSN112050](#)