
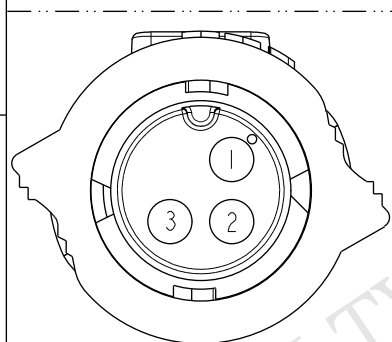


Conn

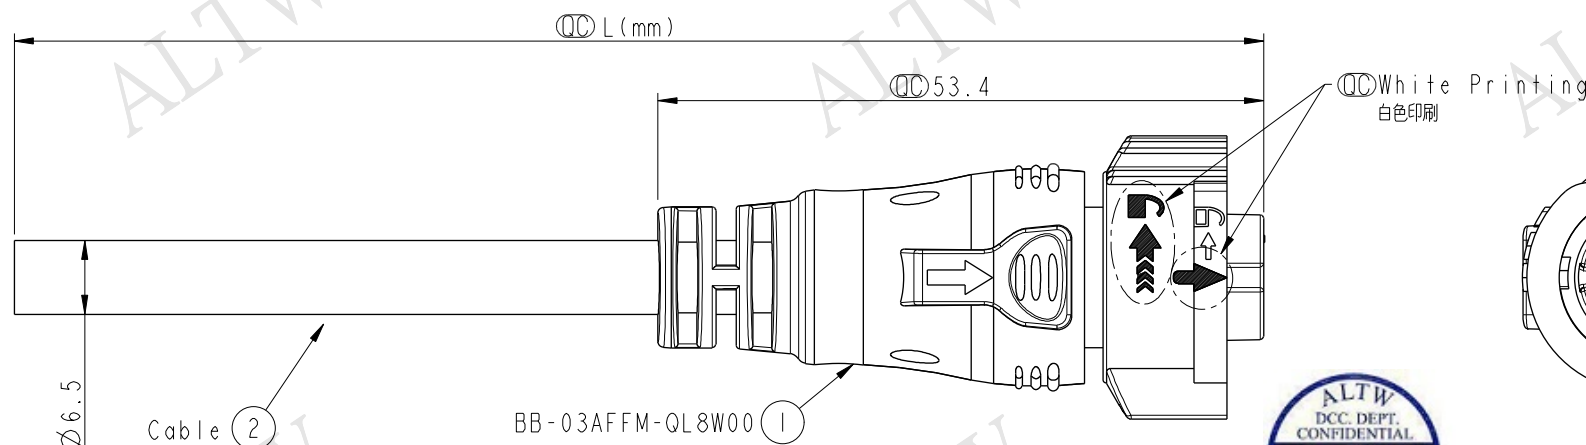

Pin Assignments Front View

3	Red	紅
2	Brown	棕
1	Black	黒
Conn.	Wire Color	
Pin Out		

BB-03AFFM-QL8D XX

```

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
.
.
.
99 : 99Meters

```

Note :

- * **①①** Important Dimension To Check.
- * Waterproof Rate: IP68(Mated)
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 10A
- * Flame Class: UL94V-0 (UV Resistance)
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Rubber: Silicon, Gray
- * Cable: UL21388 16AWG*3C+AL+My
PVC Jacket UV Resistant, OD=6.5, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT: mm		
TOLERANCE	± 0.5	

TITLE	X-Lok B-Size Molding F Conn F 3 Pin
-------	--

SCALE 3:2	SIZE A4	SHEET 1 OF 1
REV. A	WC-REV. A.2	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BB-03AFFM-QL8D10](#) [BB-03AFFM-QL8D02](#) [BB-03AFFM-QL8D05](#) [BB-03AFFM-QL8D04](#) [BB-03AFFM-QL8D03](#)