



NOTES: 1. MATERIALS OF CONSTRUCTION: HOUSING, & BODY = BRASS (ASTM-B16 H02, C36000), NICKEL PLATED (.000100 MIN THICK) CONTACT PIN = PHOSPHOR BRONZE (QQ-B-750), GOLD PLATED (.000003 MIN THICK) INSULATOR = PTFE, ASTM D 1710 OR EQUIV. FERRULE = BRASS (JIS H326C, C2700), NICKEL PLATED (.000100 MIN THICK)	31-2375-RFX		REVISIONS				
	DRAWING NO.	REV	DESCRIPTION		DATE	ECO	APPR
	THIRD ANGLE PROJ.		A	RELEASE TO MFG.		4/25/02	44029

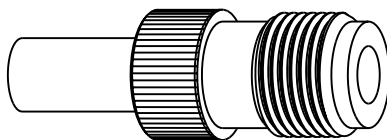

SCALE 1.500

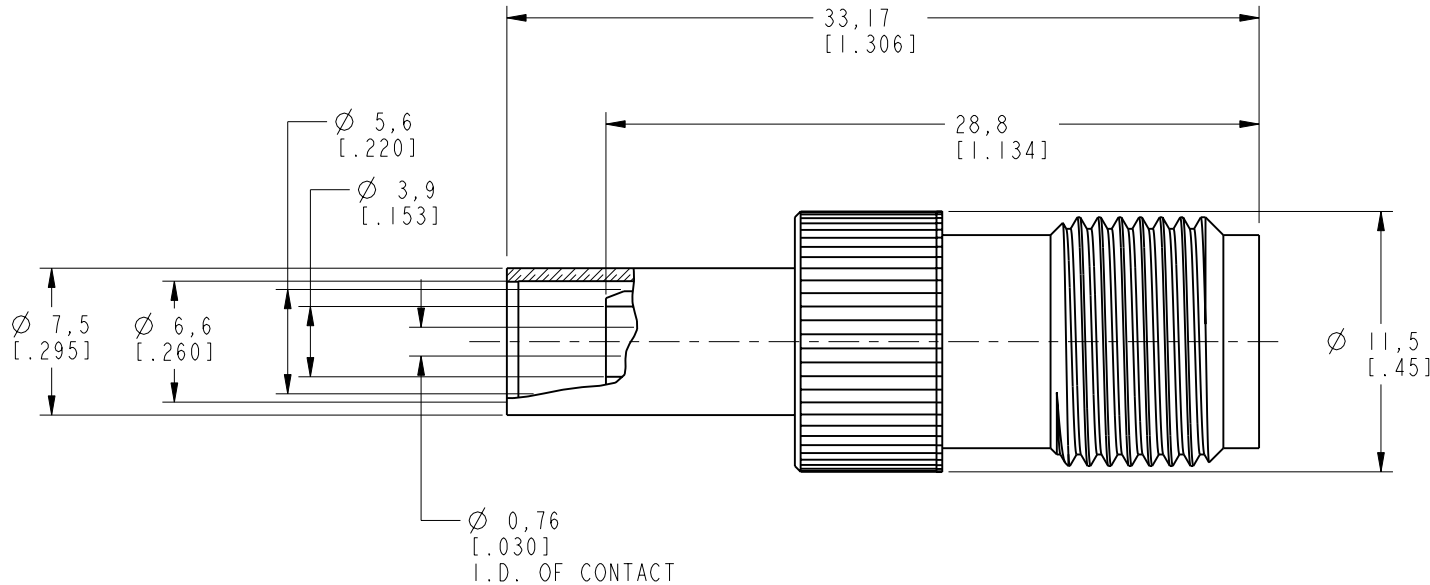

33,17
[1.306]

28,8
[1.134]

Ø 5,6
[.220]


Ø 3,9
[.153]

Ø 7,5
[.295]

Ø 6,6
[.260]

Ø 11,5
[.45]

Ø 0,76
[.030]
I.D. OF CONTACT

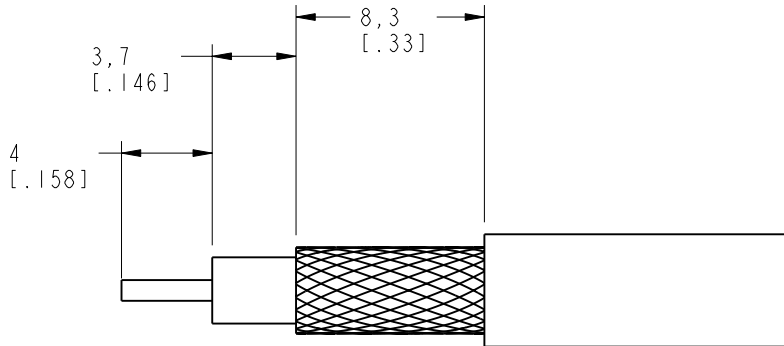

3,7
[.146]

8,3
[.33]

4
[.158]

RECOMMENDED CABLE STRIPPING DIMENSIONS
SCALE 3.000

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 0.5 - 6mm ±0.2mm 6 - 30mm ±0.4mm 30 - 120mm ± 0.6mm	MATERIAL	DRAWN C. McGRATH	DATE 4/23/02	TITLE TNC CRIMP JACK			Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810		
	REFERENCE GEN# 31-6031_ASSY	ENGINEER T. AUBIN	DATE 4/23/02						
		APPROVED O. BARTHELMES	DATE 4/25/02						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[031-2375-RFX](#)